

A Very Low-Dropout Regulator with 3A Load Current

General Description

The ET5C208M is a CMOS-based very low dropout voltage regulator, offering 3A with NMOS pass transistor and a separate bias supply voltage (V_{BIAS}). The device provides very stable, accurate output voltage with high ripple rejection and excellent full load transient performance. The ET5C208M consist of an accurate 0.8V internal voltage-reference, an error amplifier, an under-voltage lock-out (UVLO) block, an output current limit circuit and a thermal-shutdown circuit.

The ET5C208M can set the output voltage through external resistor divider with FB pin. A Power Good pin (PG) is also available. The ET5C208M is offered in ESOP8 package.

Features

- Output Current: 3.0A
- Wide Input Voltage Range: 0.8V to 5.5V
- Wide BIAS Voltage Range: 2.2V to 5.5V
- Output Voltage Range: 0.8V to 3.6V (externally set)
- Dropout Voltage: 135mV at 3A
- Open Drain Power Good (PG) Output
- Excellent Transient Response
- Built-in Soft-start Function
- Built-in Current Limit and Thermal Shutdown Protection
- Package Information:


Part No.	Package	MSL
ET5C208M	ESOP8	Level 3

Applications

- Telecom Industrial and Consumer Equipment
- FPGA, DSP and Logic Power Supplies
- Switching Power Supply Post Regulation
- Specific Start-up Time or Sequencing Requirement Applications

ET5C208M

Pin Configuration

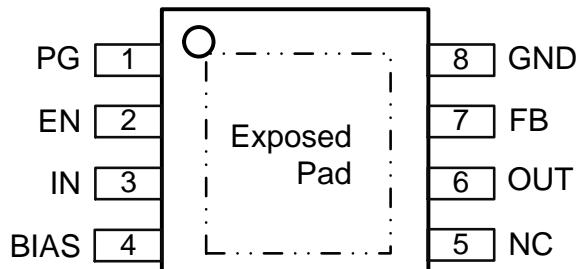


Top View

Pin Function

Pin Name	Symbol	Pin Description
1	PG	Power-Good pin is an open-drain, active-high output that indicates the status of V _{OUT} . A pull-up resistor from 10kΩ to 1MΩ should be connected to a supply and the PG pin can be left floating alternatively.
2	EN	Enable pin. Active high and this pin must not be left floating.
3	IN	Unregulated input voltage pin.
4	BIAS	Input voltage for internal control circuits.
5	NC	No connect pin.
6	OUT	Regulated output voltage.
7	FB	Connecting to the center tap of an external resistor divider network that sets the output voltage. This pin must not be left floating.
8	GND	Ground pin.
Exposed Pad		Should be soldered to the ground plane for increasing thermal performance.

ET5C208M

Block Diagram

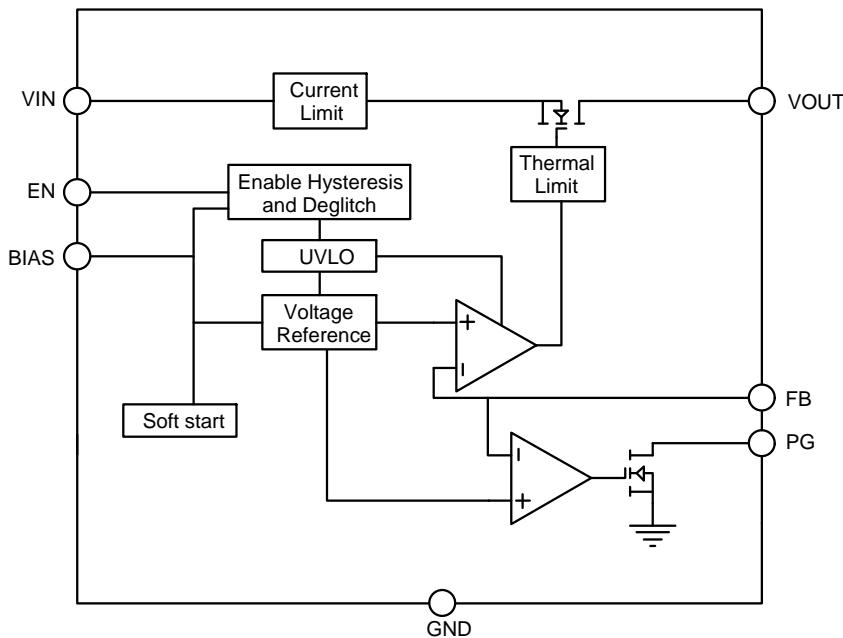

Functional Description

The ET5C208M dual-rail very low dropout voltage regulator is using NMOS pass transistor for output voltage regulation from V_{IN} voltage. All the internal control circuit is powered by the V_{BIAS} voltage.

The use of an NMOS pass transistor offers several advantages in applications. Comparing to PMOS topology devices, the output capacitor has reduced impact on loop stability. The dropout voltage between V_{IN} and V_{OUT} can be very low compared with standard PMOS regulators in very low V_{IN} applications.

The ET5C208M offers smooth monotonic start-up. The controlled voltage rising limits the inrush current.

The Enable (EN) input is equipped with internal hysteresis and deglitch filter. An Open Drain Power Good (PG) output is available for V_{OUT} monitoring. When V_{OUT} exceeds the PG threshold, the PG pin goes into high-impedance state. When is below this threshold, the PG pin is set to low-impedance state.

The ET5C208M is an adjustable linear regulator. As shown in application circuit, the required output voltage can be adjusted by two external resistors with FB pin.

Dropout Voltage

There are two Dropout voltages specified.

Firstly, the V_{IN} Dropout voltage is the voltage difference between V_{IN} and V_{OUT} when V_{OUT} starts to decrease by 2%. V_{BIAS} is set to high enough, referring to the specific value in the Electrical Characteristics table.

Secondly, the V_{BIAS} dropout voltage is the voltage difference between V_{BIAS} and V_{OUT} when V_{IN} and V_{BIAS} pins are joined together and V_{OUT} starts to decrease by 2%.

ET5C208M

Input and Output Capacitors

The device is designed to be stable for all available types and values of output capacitors $\geq 2.2\mu\text{F}$. The device is also stable with multiple capacitors in parallel, having the total effective capacitance in the specified range.

In applications where no low input supply impedance is available (PCB inductance in V_{IN} and/or V_{BIAS} inputs as an example) the recommended C_{IN} and C_{BIAS} value is $1\mu\text{F}$ or greater.

Ceramic or other low ESR capacitors are recommended. For the best performance all capacitors should be connected to the ET5C208M respective pins directly in the device PCB copper layer, not through via having not negligible impedance.

Enable Operation

The ET5C208M is turned on by setting the enable pin to High. The threshold limits are covered in the electrical characteristics table in this datasheet. When the enable function is not to be used then the pin should be connected to V_{IN} or V_{BIAS} .

Output Voltage Adjust

The output voltage can be adjusted from 0.8 V to 3.6 V using resistors divider between the output and the FB input. The output voltage can be calculated by:

$$V_{OUT}=0.8\times(1+R1/R2)$$

For example: choose $R_1=2.49\text{k}\Omega$, $R_2=4.99\text{k}\Omega$, $V_{OUT}=1.2\text{V}$

Current Limitation

When output current of V_{OUT} pin is higher than current limit threshold or the V_{OUT} pin is direct short to GND, the current limit protection will be triggered and clamp the output current at a predesigned level to prevent over-current and thermal damage.

Thermal Protection

Thermal protection disables the output when the junction temperature rises to approximately $+155^\circ\text{C}$, allowing the device to cool down. When the junction temperature reduces to approximately $+125^\circ\text{C}$ the output circuit is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits the heat dissipation of the regulator, protecting it from damage due to overheating.

ET5C208M

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage Range	-0.3 to +6	V
V_{BIAS}	Input Voltage Range	-0.3 to +6	V
V_{EN}	Enable Voltage Range	-0.3 to +6	V
V_{PG}	Power-Good Pin Voltage Range	-0.3 to +6	V
I_{PG}	PG Sink Current	0 to +1.5	mA
V_{FB}	Feedback Pin Voltage Range	-0.3 to +6	V
V_{OUT}	Output Voltage Range	-0.3 to $(V_{IN} + 0.3) \leq 6$	V
P_D	Continuous Total Power Dissipation	2.5	W
T_{JMAX}	Maximum Junction Temperature	+150	°C
T_{STG}	Storage Junction Temperature Range	-65 to +150	°C

Recommended Operating Conditions

Symbol	Parameter	Rating	Unit
V_{IN}	Input voltage range	$V_{OUT} + V_{DO}$ to 5.5	V
V_{BIAS}	Bias pin voltage range	2.2 to 5.5	V
T_A	Operating Ambient Temperature	-40 to +85	°C

ET5C208M

Electrical Characteristics

$V_{EN}=1.1V$, $V_{IN}=V_{OUT}+0.3V$, $V_{BIAS}=5.0V$, $C_{BIAS}=C_{IN}=1\mu F$, $C_{OUT}=10\mu F$, $I_{OUT}=50mA$, $T_A=-40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	$V_{IN}^{(1)}$		$V_{OUT} + V_{DO}$		5.5	V
V_{BIAS} Voltage Range	V_{BIAS}		2.2		5.5	V
Under-voltage Lock-out	V_{UVLO}	V_{BIAS} Rising	1.2	1.6	1.9	V
		Hysteresis		0.2		
Internal Reference	V_{REF}	$T_A=+25^{\circ}C$		0.8		V
Output Voltage Range	V_{OUT}	$V_{IN}= 5V, I_{OUT}=1.5A, V_{BIAS}=5V$	V_{REF}		3.6	V
Output Accuracy		$2.97V \leq V_{BIAS} \leq 5.25V$, $V_{OUT}+1.62V \leq V_{BIAS}$, $50mA \leq I_{OUT} \leq 3.0A$	-1.0		+1.0	%
Line Regulation	Reg_{LINE}	$V_{OUT(NOM)}+0.3 \leq V_{IN} \leq 5.5V$		0.01		%/V
Load Regulation	Reg_{LOAD}	$0mA \leq I_{OUT} \leq 50mA$		0.005		%/mA
		$50mA \leq I_{OUT} \leq 3.0A$		0.03		%/A
V_{IN} Dropout Voltage	$V_{DROP}^{(2)}$	$I_{OUT}=3.0A$, $V_{BIAS}-V_{OUT(NOM)} \geq 1.62V$		135	230	mV
V_{BIAS} Dropout Voltage		$I_{OUT}=3.0A$, $V_{IN}=V_{OUT}+0.3V$		1.15	1.5	V
Current Limit	I_{LIM}	$V_{OUT}=80\% \times V_{OUT(NOM)}$	3.8	4.6	7	A
V_{BIAS} Current	I_{BIAS}	$0mA \leq I_{OUT} \leq 3.0A$		1.3	2	mA
V_{BIAS} Shutdown Supply Current	I_{SHDN}	$V_{EN}=0V$		0.3	2	μA
V_{IN} to V_{OUT} Ripple rejection	$PSRR$	$1kHz, I_{OUT}=1.5A$, $V_{IN}=1.5V, V_{OUT}=1.2V$		80		dB
V_{BIAS} to V_{OUT} Ripple rejection		$10kHz, I_{OUT}=1.5A$, $V_{IN}=1.5V, V_{OUT}=1.2V$		72		dB
Output Noise Voltage	$e_N^{(3)}$	$100\text{ Hz to }100\text{ kHz}$, $I_{OUT}=3.0A$		$30 \times V_{OUT}$		μV_{rms}
% V_{OUT} Droop During Load Transient	$V_{TRLD}^{(3)}$	$I_{OUT}=50mA$ to $3.0A$ at $1A/\mu s$, $C_{OUT}=10\mu F$, $V_{OUT}=1.2V$		± 2		% V_{OUT}
Minimum Startup Time	t_{ON}	$I_{OUT}=1.5A$		220		μs
Enable Input High Level	V_{ENH}		1.1		5.5	V
Enable Input Low Level	V_{ENL}		0		0.4	V
Enable Pin Hysteresis	$V_{EN,HYS}$			100		mV
Enable Pin Deglitch Time	$t_{EN,DG}$			20		μs

ET5C208M

Electrical Characteristics(Continued)

$V_{EN}=1.1V$, $V_{IN}=V_{OUT}+0.3V$, $V_{BIAS}=5.0V$, $C_{BIAS}=C_{IN}=1\mu F$, $C_{OUT}=10\mu F$, $I_{OUT}=50mA$, $T_A=-40^{\circ}C$ to $+85^{\circ}C$, unless otherwise noted. Typical values are at $T_A=+25^{\circ}C$.

Parameter	Symbol	Conditions	Min.	Typ.	Max.	Unit
Enable Pin Current	I_{EN}	$V_{EN}=5V$		0.3	1	μA
PG Threshold	V_{TH}	V_{OUT} decreasing	86.5	90	93.5	% V_{OUT}
PG Hysteresis	V_{HYS}			3		% V_{OUT}
PG Output Low Voltage	V_{PGL}	$I_{PG}=1mA$ (sinking), $V_{OUT}<V_{TH}$			0.3	V
PG Leakage Current	$I_{PG,LKG}$	$V_{PG}=5V$, $V_{OUT}>V_{TH}$		0.03	1	μA
Thermal Shutdown Temperature	$T_{SD}^{(3)}$			+155		$^{\circ}C$
Thermal Shutdown Released Temperature	$T_{SR}^{(3)}$			+125		$^{\circ}C$

Notes:

1: The maximum input voltage should take into account the maximum power consumption ($P_{D(MAX)}$). The calculation formula is as follows:

$$P_{D(MAX)} = (V_{IN(MAX)} - V_{OUT}) \times I_{OUT}$$

The maximum power consumption of the circuit is 2500mW.

$$V_{IN(MAX)} = 2500mW / I_{OUT} + V_{OUT}$$

For example:


If $V_{OUT}=1.2V$, $I_{OUT}=2500mA$, The maximum input voltage is $V_{IN(MAX)}=2500mW / 2500mA+1.2=2.2V$

2: V_{DROP} FT test method: test the V_{OUT} voltage at $V_{SET} + V_{DROP MAX}$ with output current.

3: Guaranteed by design and characterization. not a FT item.

ET5C208M

Application Circuits

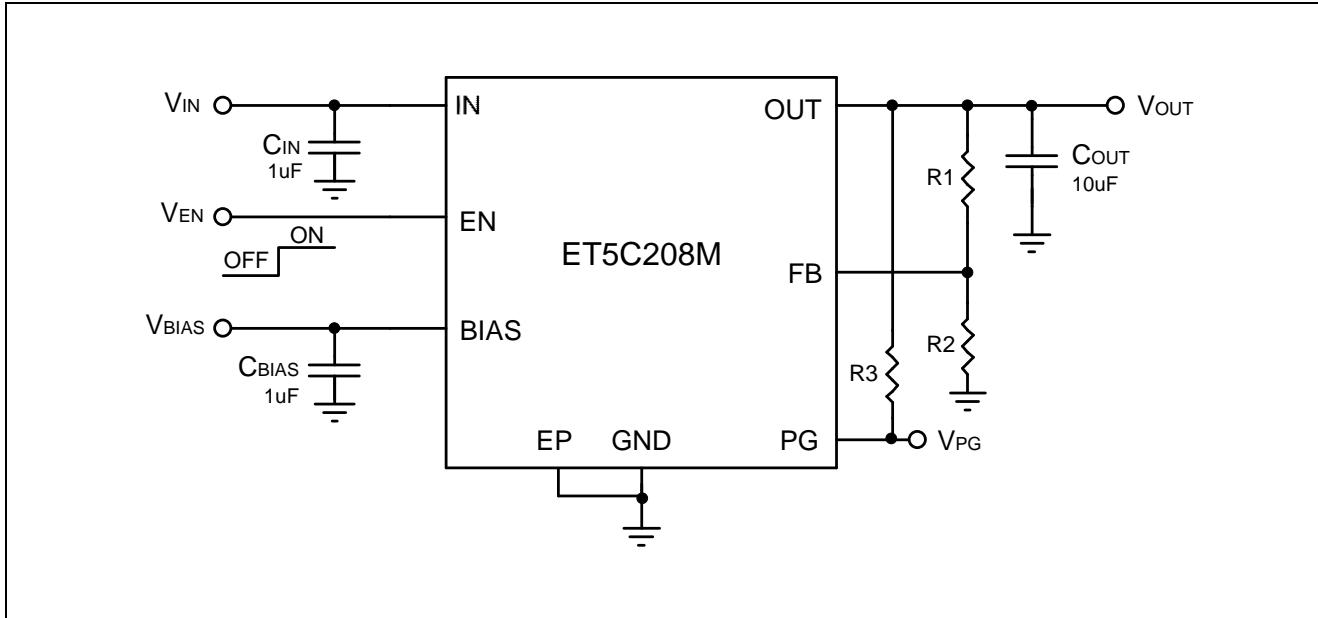


Note* $V_{OUT} = 0.8 \times (1 + R_1/R_2)$, R_3 should be from $10\text{K}\Omega$ to $1\text{M}\Omega$.

ET5C208M

Typical Characteristics


($V_{OUT}=1.2V$, $V_{IN}=1.5V$, $V_{BIAS}=5.0V$, $C_{IN}=C_{BIAS}=1\mu F$, $C_{OUT}=10\mu F$, $T_A= -40^{\circ}C \sim +85^{\circ}C$)

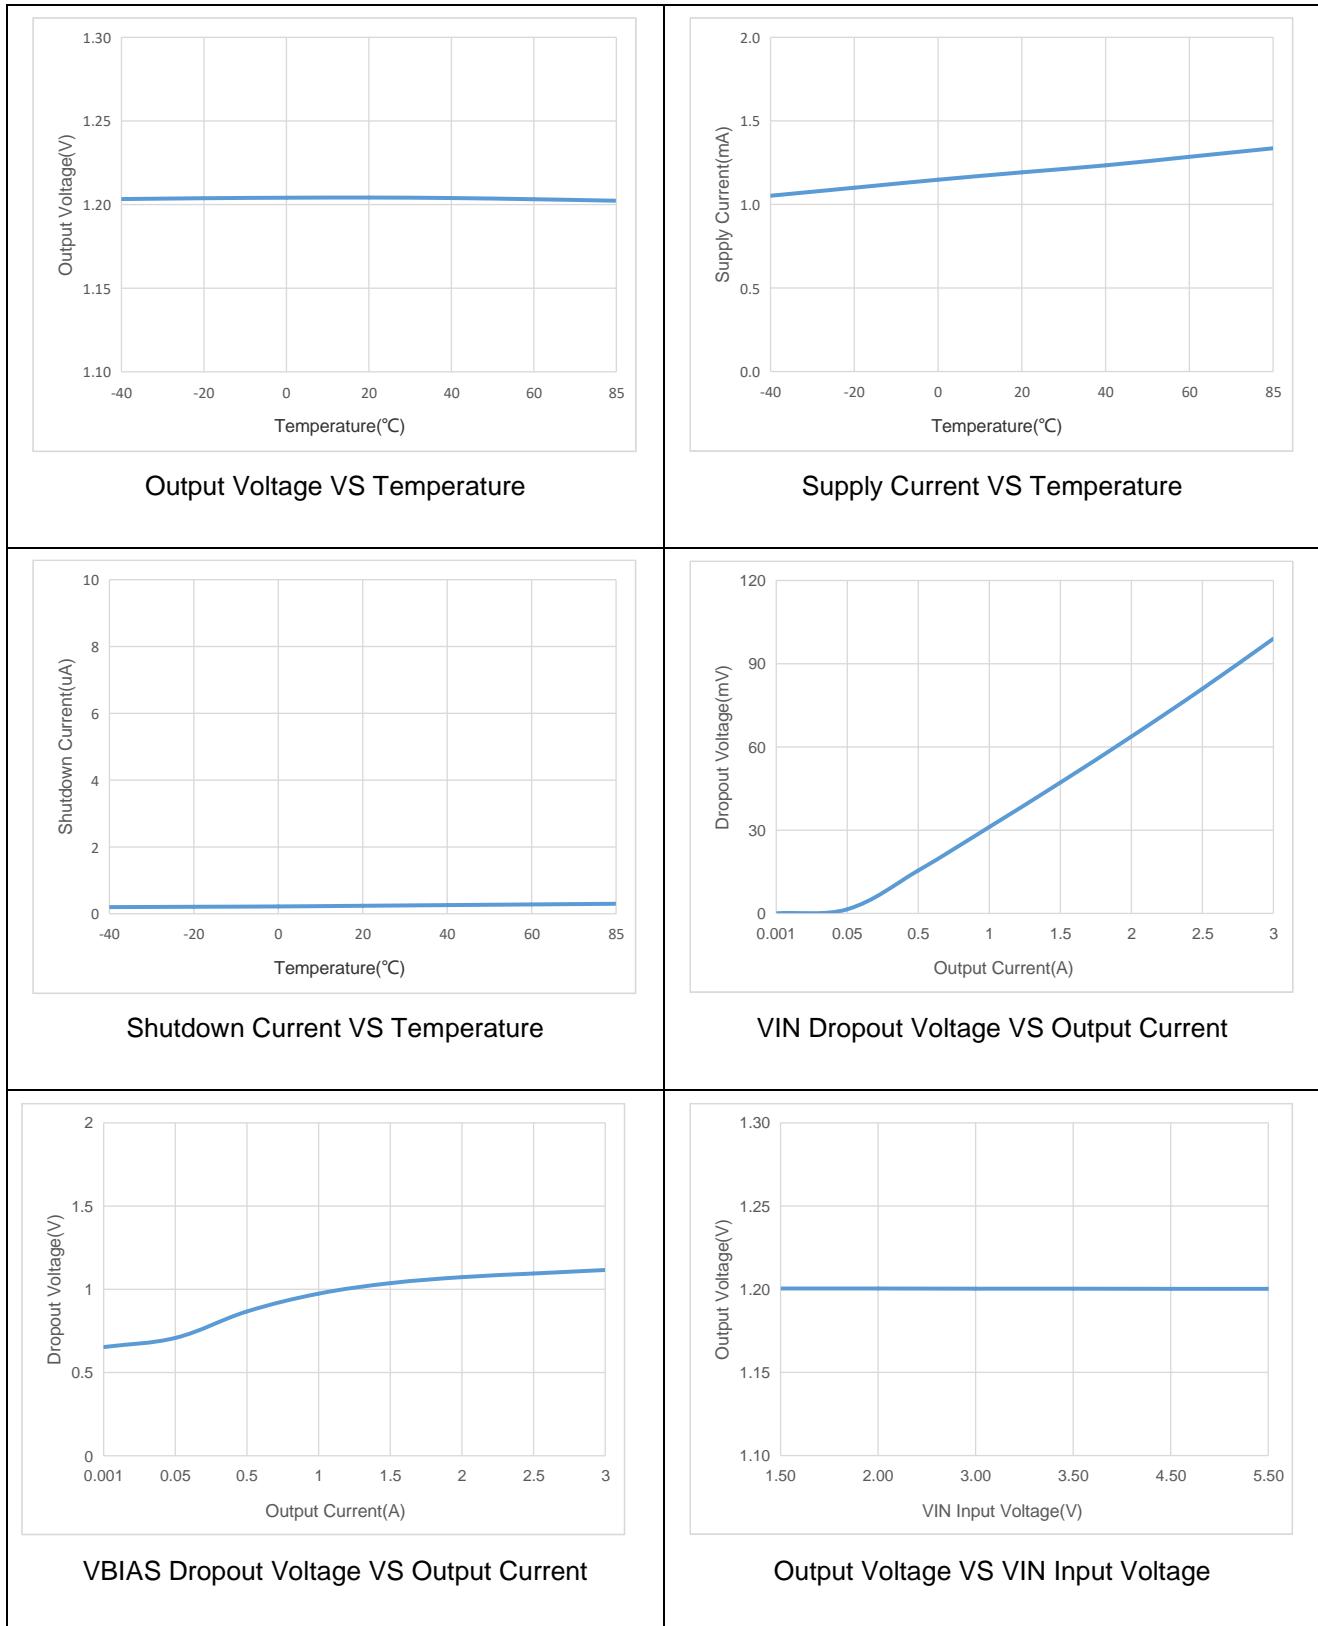

ET5C208M


Typical Characteristics(Continued)

($V_{OUT}=1.2V$, $V_{IN}=1.5V$, $V_{BIAS}=5.0V$, $C_{IN}=C_{BIAS}=1\mu F$, $C_{OUT}=10\mu F$, $T_A= -40^{\circ}C \sim +85^{\circ}C$)

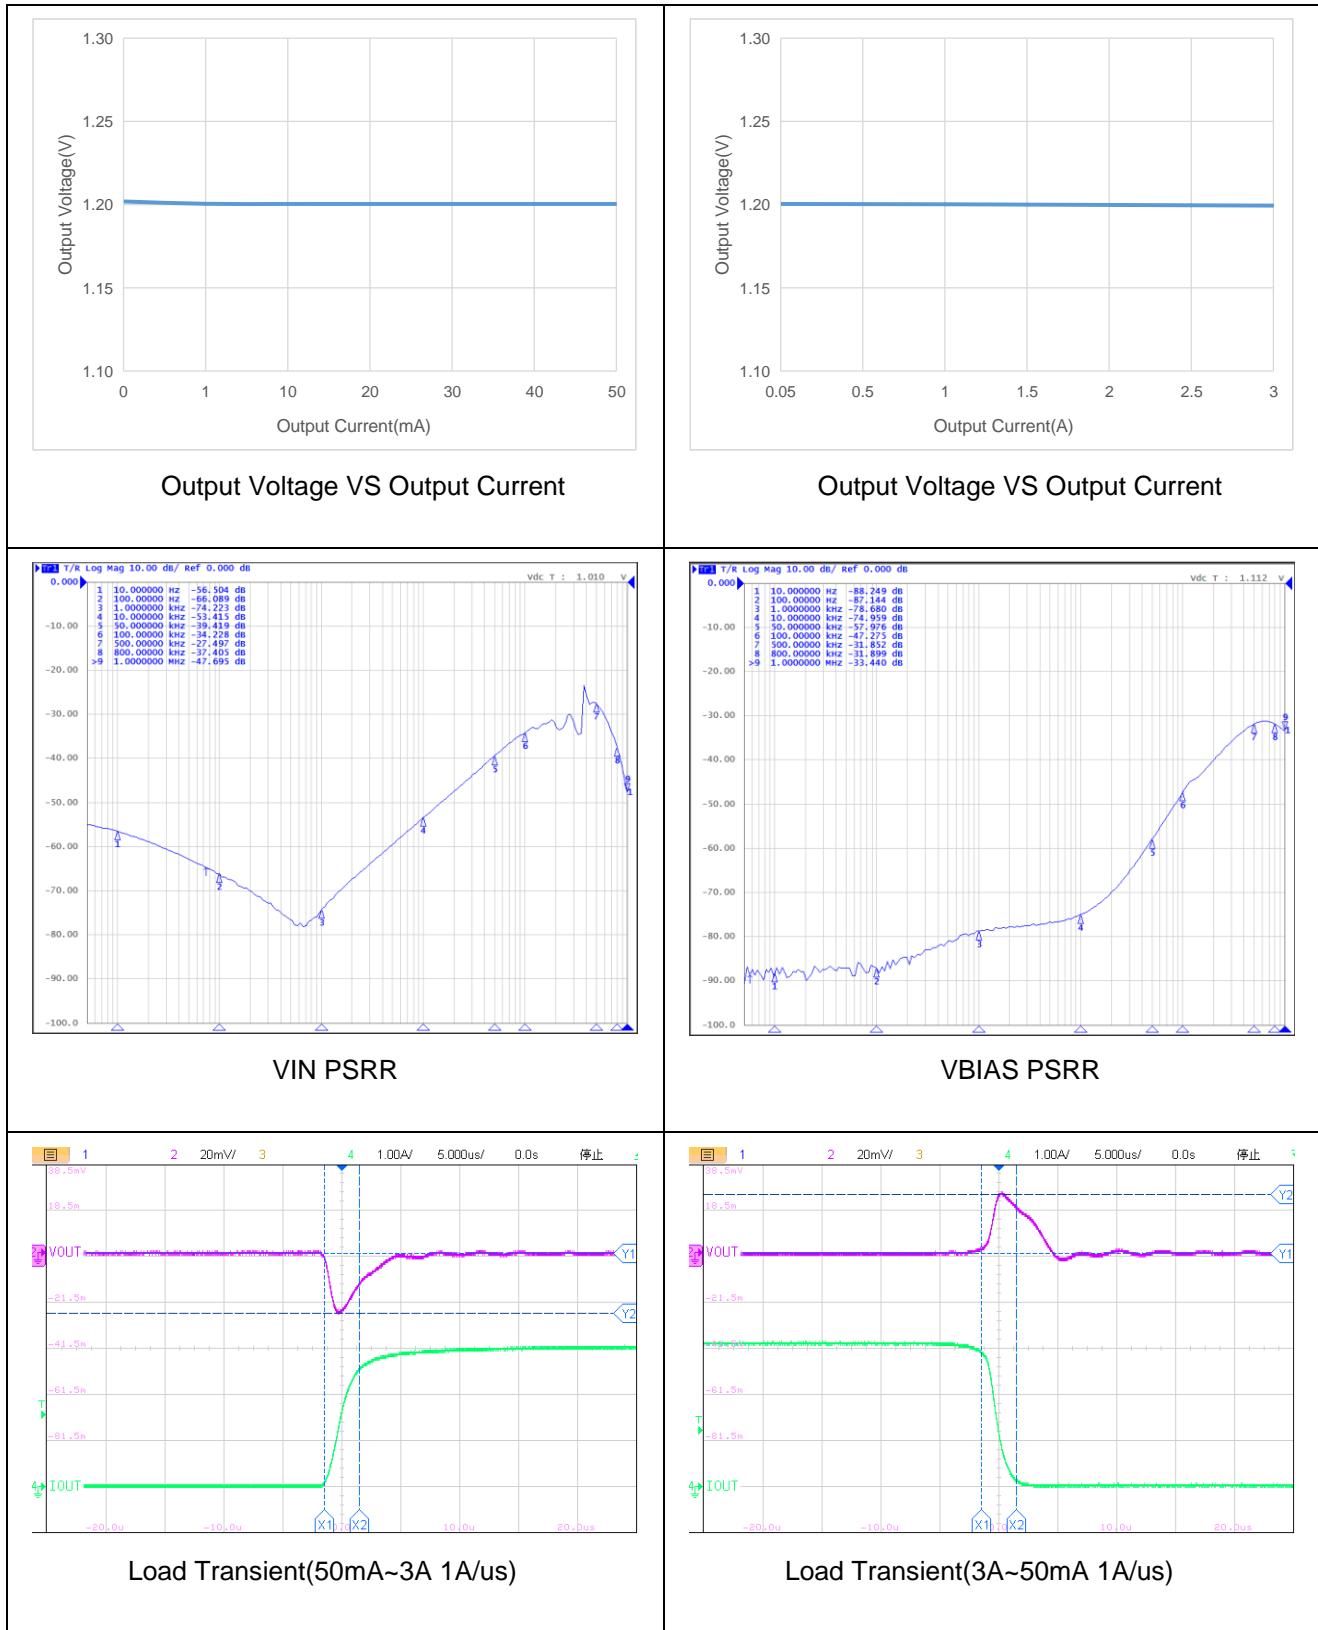

ET5C208M

Package Dimension ESOP8

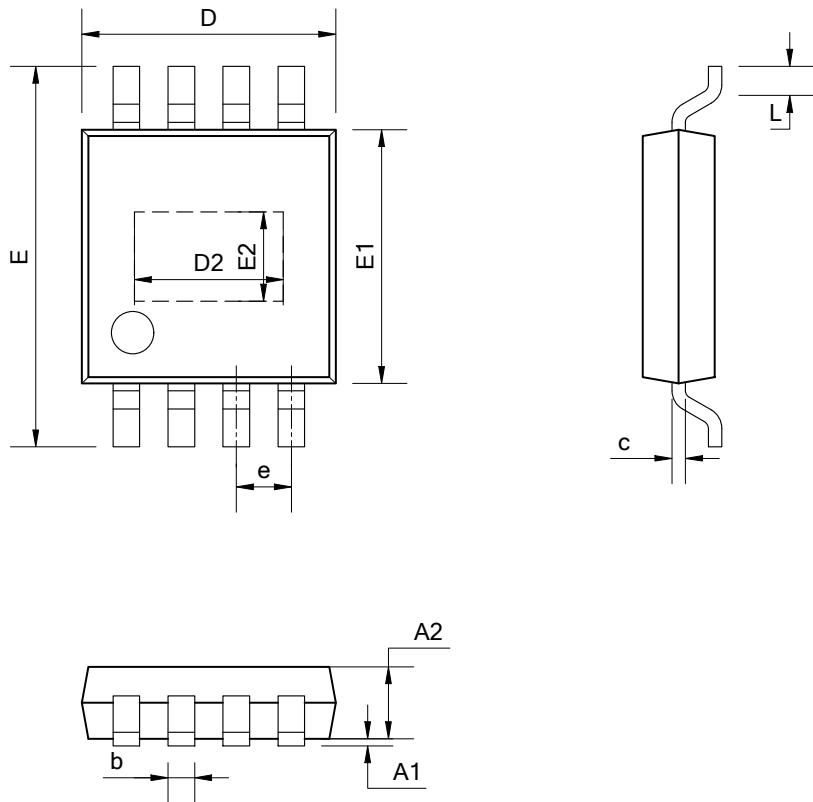

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A1	0.00	-	0.15
A2	1.35	1.40	1.50
b	0.38	-	0.47
c	0.17	-	0.25
D	4.80	4.90	5.00
E	5.80	6.00	6.20
D2	3.02	3.17	3.32
E1	3.80	3.90	4.00
E2	2.13	2.28	2.43
e	1.17	1.27	1.37
L	0.45	0.60	0.80

ET5C208M

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2019-05-20	Preliminary Version, development stage	Chenh	Chenh	Liujiy
1.0	2023-7-11	Official Version	Shibo	Chenh	Liujiy