

250 MHz, Rail-to-Rail Output CMOS Operational Amplifier

General Description

ET85702 offers low voltage operation, negative-rail input, rail-to-rail output, as well as excellent speed/power consumption ratio, providing an excellent bandwidth (250 MHz) and slew rate of 180 V/ μ s. ET85702 is unity gain stable and feature an ultra-low input bias current.

ET85702 sets an industry-leading power-to performance ratio for rail-to-rail amplifiers. ET85702 is specified at the full temperature range of -40°C to $+125^{\circ}\text{C}$ under single or dual power supplies of 2.5 V to 5.5 V.

ET85702 is available in a SOP8 package.

Features

- High Gain Bandwidth: 250 MHz
- Rail-to-rail Output
- 1.5 mV Typical V_{os}
- Input Voltage Range: -0.2 V to 3.9 V with $V_S = 5\text{ V}$
- Supply Range: +2.5 V to +5.5 V
- Specified up to $+125^{\circ}\text{C}$

Applications


- Audio ADC Input Buffers
- Photodiode Preamp
- High-Density Systems
- Portable Systems
- Driving A/D Converters

ET85702

Device information

| Part No. | Package | Tape / Reel |
|----------|---------|---------------|
| ET85702M | SOP8 | Tape and Reel |

Pin Configuration

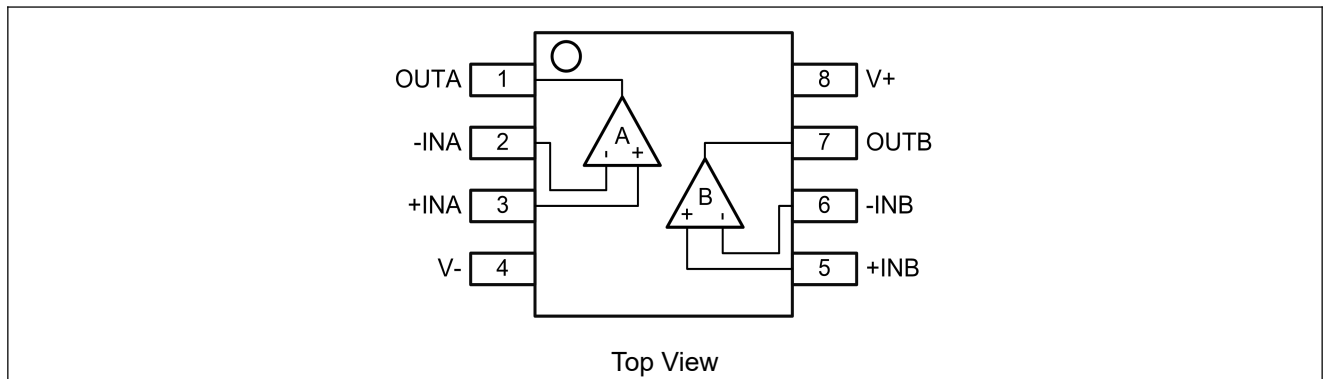

Pin Function

| Pin Number | Symbol | Descriptions |
|------------|--------|---------------------|
| 1,7 | OUT | Output |
| 4 | V- | Negative supply |
| 3,5 | +IN | Non-inverting input |
| 2,6 | -IN | Inverting input |
| 8 | V+ | Positive supply |

ET85702

Absolute Maximum Ratings

Stresses beyond those listed under Absolute Maximum Ratings may cause permanent damage to the device. These are only stress ratings, and functional operation of the device at these or any other conditions beyond those indicated under recommended operating conditions are not implied. Exposure to absolute-maximum-rated conditions for extended periods may affect device reliability.

| Parameter | Rating | Unit |
|---|--|------|
| Supply Voltage | 0 to 7 | V |
| Signal input terminals Voltage ⁽¹⁾ | (V ₋)-0.5 to (V ₊)+0.5 | V |
| Signal input terminals Current ⁽¹⁾ | -10 to +10 | mA |
| ESD (Human Body Model) | ±4000 | V |
| Storage Temperature Range | -65 to +150 | °C |
| Max Junction Temperature Range | +150 | °C |
| Operating Temperature Range | -40 to +125 | °C |

Note1: Input terminals are diode-clamped to the power-supply rails. Input signals that can swing more than 0.5 V beyond the supply rails should be current limited to 10 mA or less.

Recommended Operating Conditions

| Characteristic | Symbol | Min | Max | Unit |
|-----------------------------|-----------------------|-------------|-------------|------|
| DC Supply Voltage | $V_S = (V_+) - (V_-)$ | 2.5 (±1.25) | 5.5 (±2.75) | V |
| Operating Temperature Range | T _A | -40 | +125 | °C |

ET85702

Electrical Characteristics


At $T_A = +25^\circ\text{C}$, $V_S = 5\text{ V}$, $G = +2$, $R_F = 470\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S/2$, and $V_{CM} = V_S/2$ (unless otherwise noted)

| Symbol | Parameter | Conditions | Min | Typ | Max | Unit |
|---------------------------|---|--|------|-----------|-----------|------------------------------|
| POWER SUPPLY | | | | | | |
| V_S | Specified voltage range | | 2.5 | | 5.5 | V |
| I_Q | Quiescent current per amplifier | | | 3.2 | 3.9 | mA |
| PSRR | Input offset voltage vs power supply ⁽²⁾ | $V_S = 2.5\text{ V to }5.5\text{ V}$, $V_{CM} = (V_-)+0.5\text{ V}$ | 70 | 90 | | dB |
| INPUT | | | | | | |
| V_{CM} | Common-mode voltage range | $V_S = 5\text{ V}$ | -0.2 | | 3.9 | V |
| CMRR | Common-mode rejection ratio ⁽²⁾ | $V_S = 5.5\text{ V}$, $V_{CM} = -0.2\text{ V to }3.5\text{ V}$ | 66 | 85 | | dB |
| V_{OS} | Input offset voltage | $V_{CM} = V_S/2$ | | ± 1.5 | ± 7.5 | mV |
| dV_{OS}/dT | Input offset voltage vs temperature | $V_{CM} = V_S/2$, $T_A = -40^\circ\text{C to }+125^\circ\text{C}$ | | 4 | | $\mu\text{V}/^\circ\text{C}$ |
| I_B | Input bias current ⁽²⁾ | | | ± 1 | | pA |
| I_{OS} | Input offset current ⁽²⁾ | | | ± 1 | | pA |
| OUTPUT | | | | | | |
| A_{OL} | Open-loop voltage gain | $V_S = 5.0\text{ V}$, $R_L = 1\text{ K}\Omega$, $V_O = V_S-0.2\text{ V}$ | 95 | 110 | | dB |
| | | $V_S = 5.0\text{ V}$, $R_L = 150\ \Omega$, $V_O = V_S-0.3\text{ V}$ | 78 | 85 | | |
| V_O | Voltage output swing from supply rails | $R_L = 1\text{ k}\Omega$ | | 20 | | mV |
| I_{OUT} | Output Current Source | | | 85 | | mA |
| | Output Current Sink | | | 90 | | mA |
| FREQUENCY RESPONSE | | | | | | |
| | Small-Signal Gain-bandwidth | $V_{OUT} = 100\text{ mVpp}$, $G=1$ | | 250 | | MHz |
| | | $V_{OUT} = 100\text{ mVpp}$, $G=2$ | | 130 | | MHz |
| | | $V_{OUT} = 100\text{ mVpp}$, $G=5$ | | 33 | | MHz |
| | | $V_{OUT} = 100\text{ mVpp}$, $G=10$ | | 15 | | MHz |
| SR | Slew rate | | | 180 | | V/ μs |
| GBP | Gain-Bandwidth Product | | | 250 | | MHz |
| NOISE | | | | | | |
| e_n | Input voltage noise density ⁽²⁾ | $f = 1\text{ MHz}$ | | 8 | | nV/ $\sqrt{\text{Hz}}$ |


Note2: Guaranteed by design.

Typical Characteristics

At $T_A = +25^\circ\text{C}$, $V_S = \pm 2.5\text{ V}$, $G = +2$, $R_F = 470\ \Omega$, and $R_L = 150\ \Omega$ connected to $V_S/2$, and $V_{CM} = V_S/2$ (unless otherwise noted)

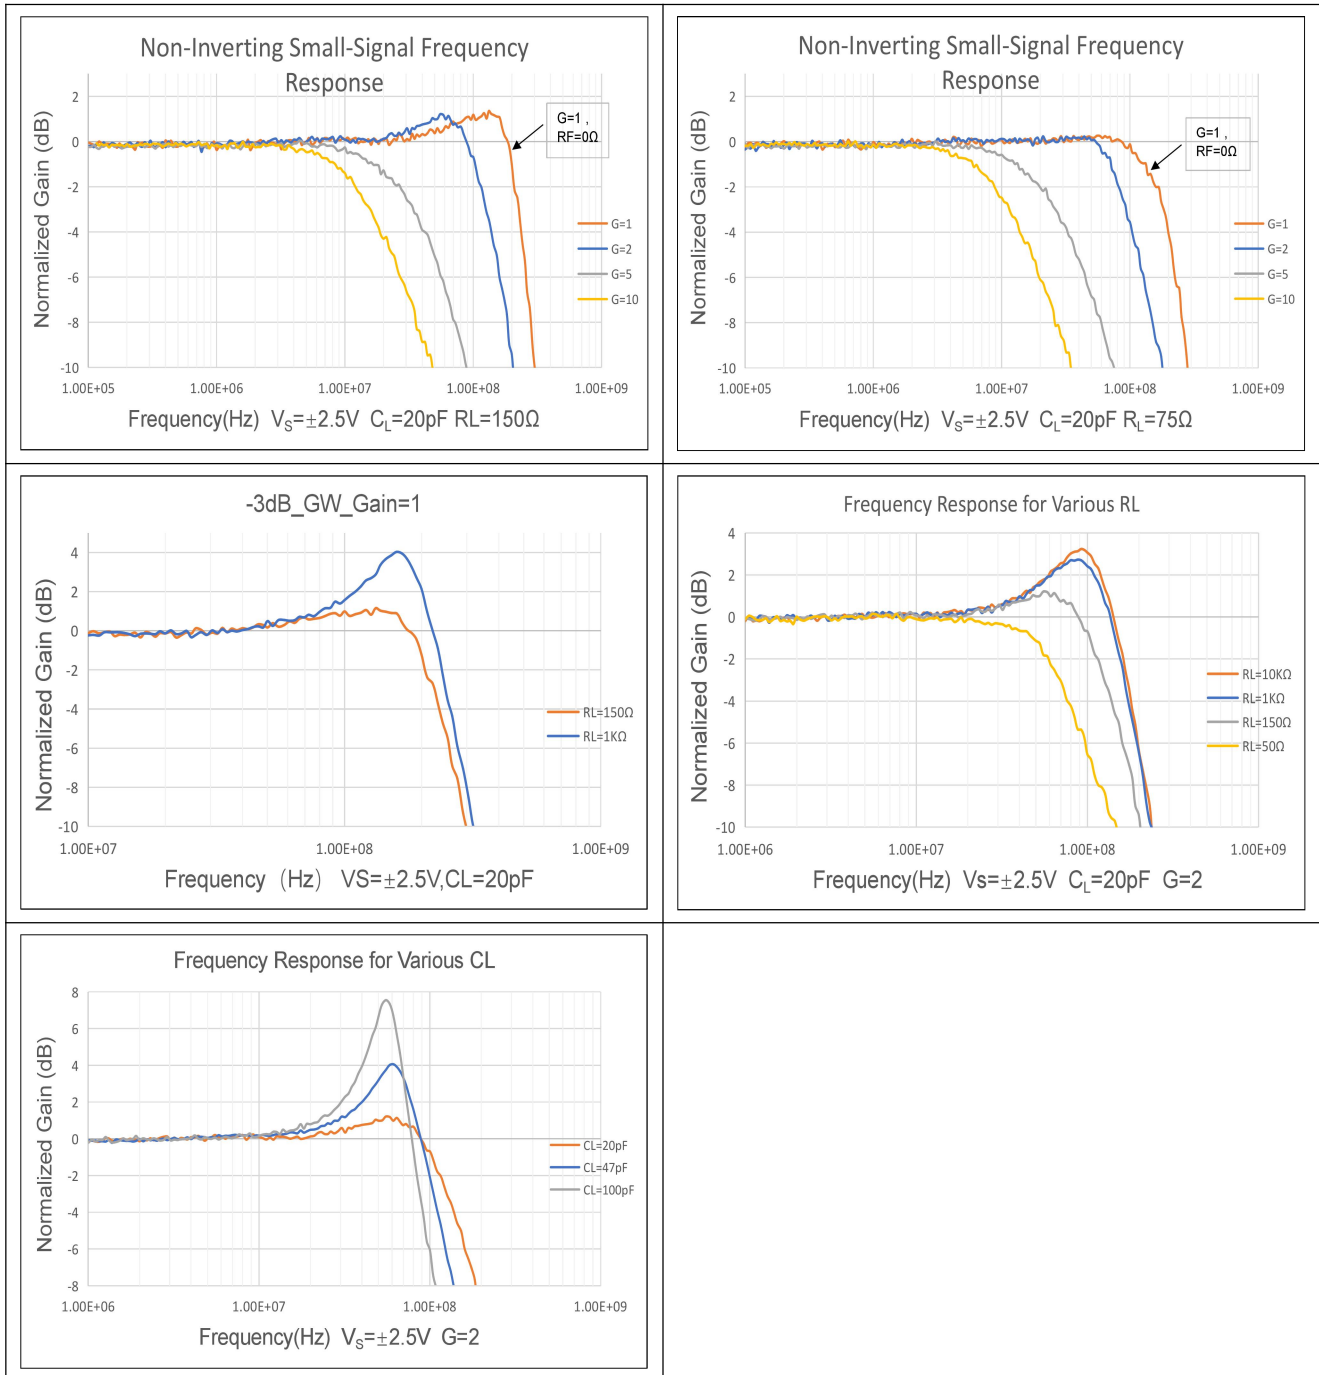

Typical Characteristics(Continued)

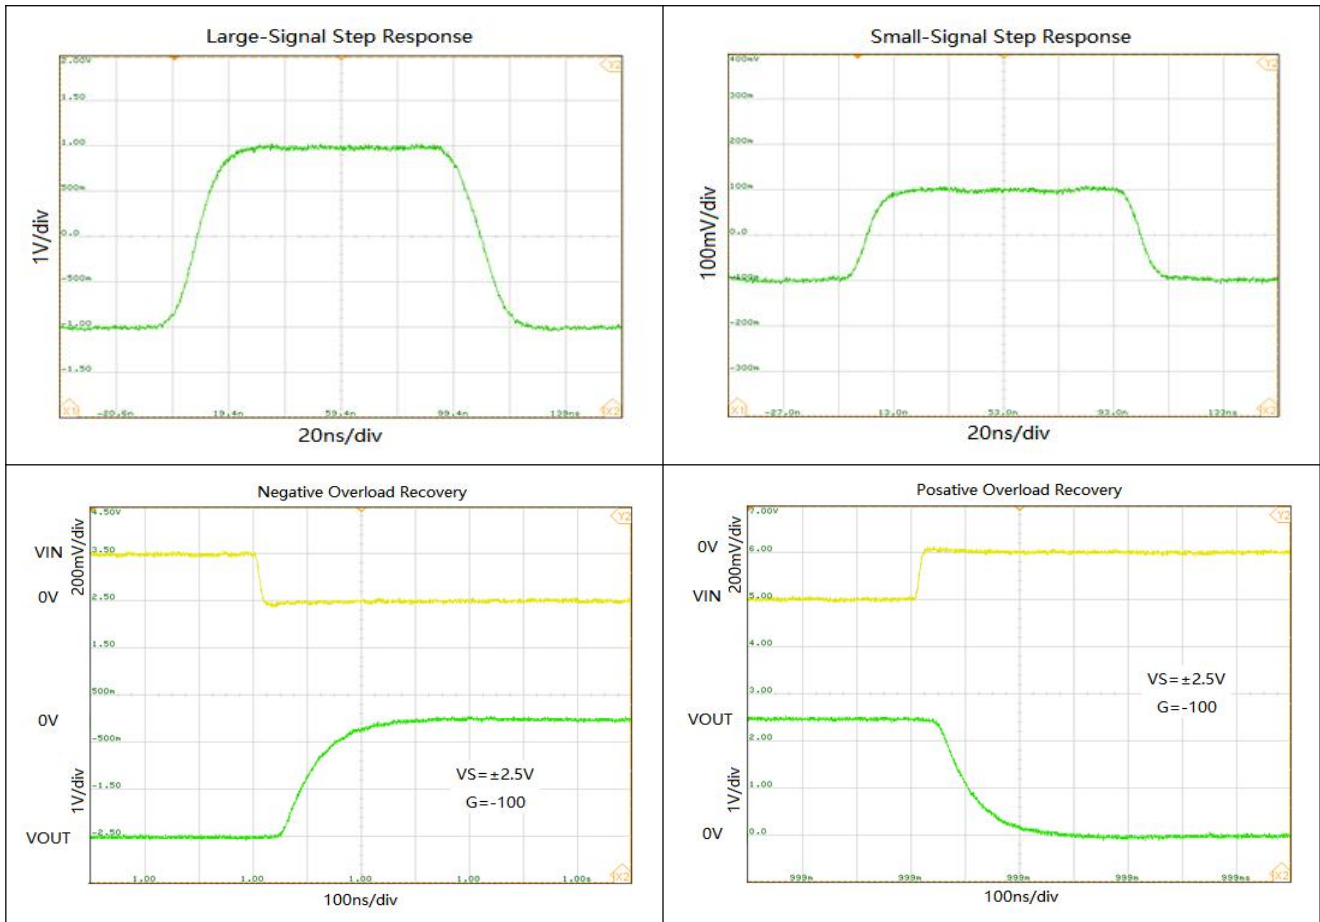

ET85702

Application Notes

ET85702 is a high speed, rail-to-rail operational amplifier that can be run from a single-supply voltage 2.5 V to 5.5 V (± 1.25 V to ± 2.75 V). Supply voltages higher than 7 V (absolute maximum) can permanently damage the amplifier. Good layout practice mandates use of a 0.1 μ F capacitor place closely across the supply pins.

Layout Guidelines

Attention to good layout practices is always recommended. Keep traces short. When possible, use a PCB ground plane with surface-mount components placed as close to the device pins as possible. Place a 0.1 μ F capacitor closely across the supply pins. These guidelines should be applied throughout the analog circuit to improve performance and provide benefits such as reducing the EMI susceptibility.




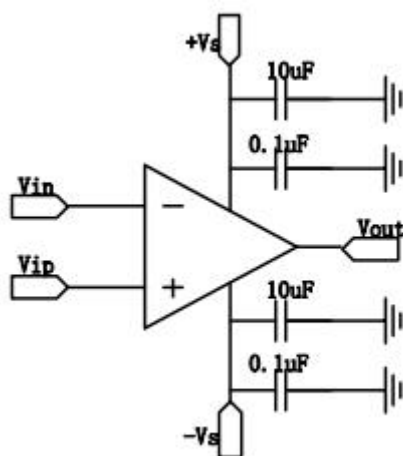


Figure1. Amplifier with Bypass Capacitors

Package Dimension

The drawing shows a top-down view of a square package with a central circular feature. Four pins are visible on the top edge, and four on the bottom edge. Dimension lines indicate the following values:

- Top pin pitch: 4.90 ± 0.20
- Left side length: 6.00 ± 0.20
- Right side length: 3.90 ± 0.20
- Bottom pin pitch: 1.27BSC

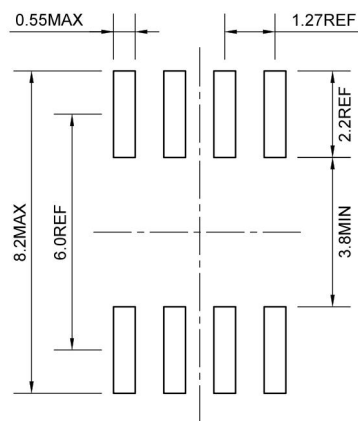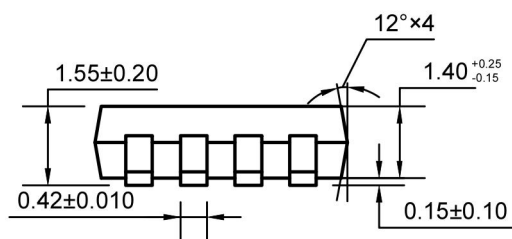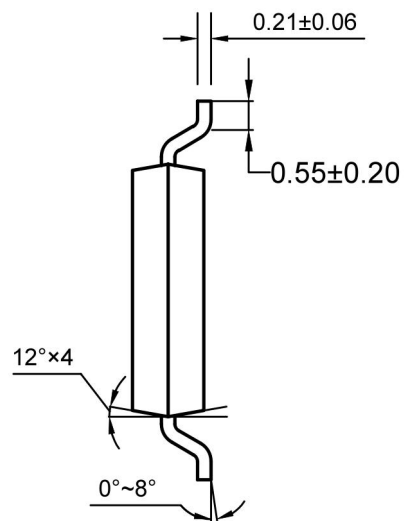

Recommended Land Pattern

Unit: mm

ET85702

Revision History and Checking Table

| Version | Date | Revision Item | Modifier | Function & Spec Checking | Package & Tape Checking |
|---------|------------|---------------------|----------|-----------------------------|----------------------------|
| 0.0 | 2024-04-03 | Preliminary Version | Huyt | Chenh | Liujiy |
| 1.0 | 2024-04-25 | Original Version | Huyt | Chenh | Liujiy |
| | | | | | |
| | | | | | |