

Over Voltage and Over Current Protection IC

General Description

ET9528 is an Over-Voltage-Protection (OVP) and Over-Current-Protection (OCP) device. It can disconnect IN to OUT to protect load in case wrong input operating conditions are detected. The system is positive over-voltage protected up to 36V. The internal over-voltage thresholds (OVLO) is 6.1V and internal over-current thresholds (OCP) is 2.5A. ET9528 also has internal over temperature protect(OTP) function and it can monitor chip temperature to protect the device.

The device is packaged in advanced full-Green SOT23-6 package .

Features


- Typical R_{ON} is 110m Ω N-Channel MOSFET @5V/1A
- V_{IN} Operating Range: 2.5V to 36V
- Internal Over-voltage Lockout : 6.1V
- Internal Over-current Lockout : 2.5A (MIN)
- Over-voltage-Protection Response Time: <500ns
- Startup Debounce Time: 16ms (TYP).
- Typical Output Power on Time: 16.3ms (TYP).
- Internal Thermal-Shutdown Protection
- All pins ESD Protected: Human Body Model (JESD22-A114) $\pm$ 2KV Pass
- SOT23-6 package

Application

- GPS and Navigation Equipment
- Portable Media Devices, Laptop & MID
- SLR Digital Cameras
- Industrial Handheld and Enterprise Equipment

ET9528

Pin Configuration

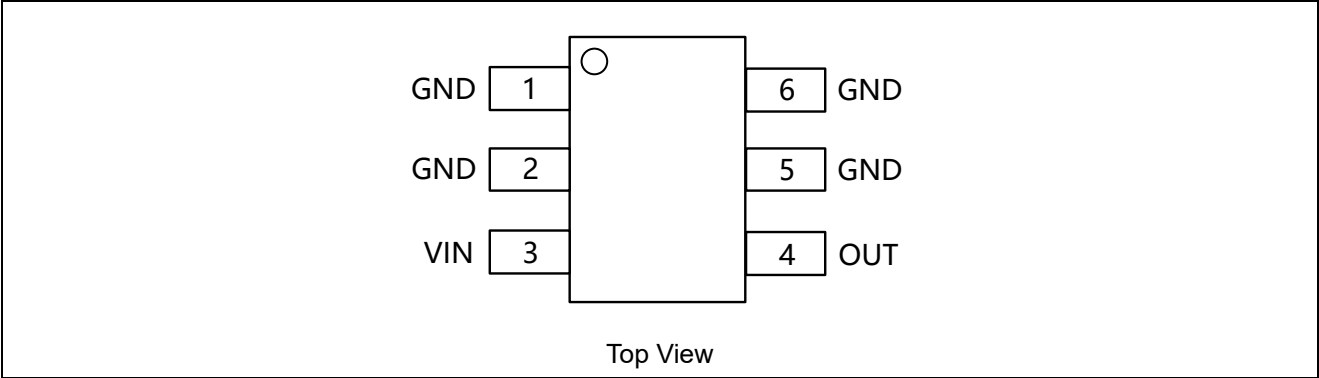


Pin Function

Pin No.	Name	Description
3	VIN	Input Voltage Pin.
1, 2, 5, 6 ⁽¹⁾	GND	Ground. Connect GND pins together for proper operation.
4	OUT	Load Output Pin .

Note1: PIN 1,5,6 can be floated if necessary.

Block Diagram

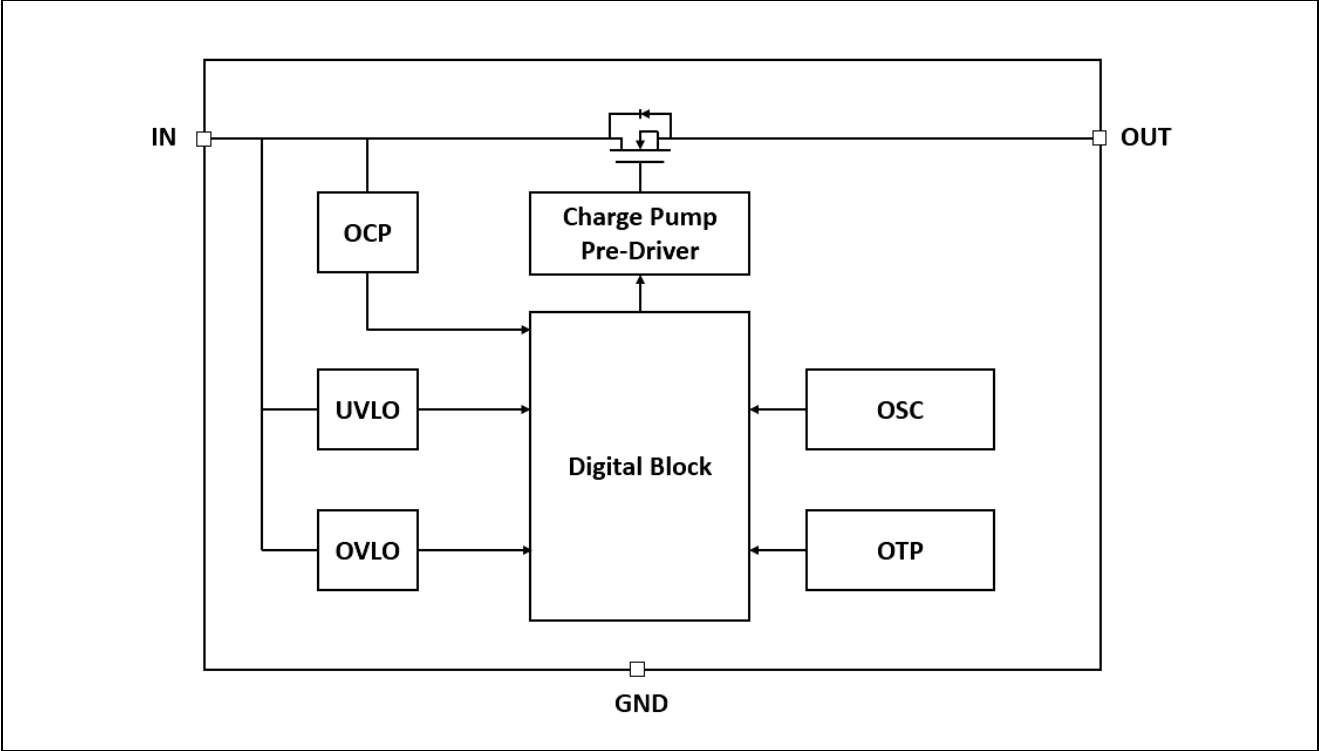

ET9528

Functional Description

The OVP switch with over-voltage protection feature a low 110m Ω (typical) on-resistance(R_{ON}) internal FET and protect low-voltage systems against voltage faults up to 36V_{DC}. The internal over-voltage thresholds (OVLO) is 6.1V and internal over-current thresholds (OCP) is 2.5A (MIN).

The internal FET turns off when the junction temperature exceeds +155 °C (TYP). The device exits thermal shutdown after the junction temperature cools by 20 °C (TYP.).

Input Capacitor

To limit the voltage drop on the input supply caused by transient inrush current when the switch turns on into a discharged load capacitor or short-circuit, a capacitor 1 μ F or larger must be placed between the VIN and GND pins.

Output Capacitor

A 1 μ F or larger capacitor should be placed between the OUT and GND pins.

Absolute Maximum Ratings

Stresses exceeding the absolute maximum ratings may damage the device. The device may not function or be operable above the recommended operating conditions and stressing the parts to these levels is not recommended. In addition, extended exposure to stresses above the recommended operating conditions may affect device reliability. The absolute maximum ratings are stress ratings only.

Symbol	Parameters	Min	Max	Unit
V _{IN}	IN to GND	-0.3	36	V
V _{OUT}	OUT to GND	-0.3	28	V
I _{SW1}	Maximum Continuous Current of switch IN-OUT		2.5	A
I _{SW2}	Maximum Peak Current of switch IN-OUT(10ms)		4.0	A
P _D	Power Dissipation at T _A = +70°C		500	mW
T _{STG}	Storage Junction Temperature	-65	+150	°C
T _A	Operating Temperature Range	-40	+85	°C
T _{SOLD}	Soldering Temperature (reflow).		+260	°C
T _J	Junction Temperature		+150	°C

ET9528

Electrical Characteristics


Unless otherwise noted, typical values are at $V_{IN}=5.0V$ and $T_A=25^{\circ}C$.

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
Basic Operation						
V_{IN}	Input Voltage		2.5		36	V
I_{IN}	V_{IN} Quiescent Current	$V_{IN}=5.0V$, OUT floating		110		μA
R_{ON}	On-Resistance of Switch IN-OUT	$V_{IN}=5.0V$, $I_{OUT}=1A$		110		$m\Omega$
R_{DIS}	Output Discharge Resistance			3.9		$K\Omega$
V_{OVLO}	Over-voltage protect of V_{IN}	V_{IN} rise up	5.8	6.1	6.4	V
V_{OVLO_HYS}	Over-voltage Protect Hysteresis of V_{IN}			0.15		V
V_{UVLO_R}	Under Voltage Lockout Threshold	V_{IN} rising		2.2		V
Input Over						
t_{DEB}	Debounce Time	Time from $2.1V < V_{IN} < V_{OVLO}$ to $V_{OUT}=10\%$ of V_{IN}		16		ms
t_{ON}	Switch Turn-On Time	$R_L=100\Omega$, $C_L=22\mu F$, V_{OUT} from $0.1 \times V_{IN}$ to $0.9 \times V_{IN}$		0.3		ms
t_{ON_ALL}	Output power-on Time	Time from $2.1V < V_{IN} < V_{OVLO}$ to $V_{OUT}=90\%$ of V_{IN}		16.3		ms
$t_{OFF_RES}^{(2)}$	Switch turn-off response time	$V_{IN} > V_{OVLO}$ to V_{OUT} stop rising		150	300	ns
Dynamic Characteristics: see figure						
I_{OCP}	Over current protect		2.5	3.1		A
I_{SHORT}	Short current protect			120		mA
t_{OCP}	OCP debounce time			30		ms
T_{REC_OCP}	OCP recovery time			1		s
Over Temperature Protection (OTP) ⁽²⁾						
T_{SHDN}	Thermal Shutdown			155		$^{\circ}C$
T_{SHDN_HYS}	Thermal-shutdown Hysteresis			20		$^{\circ}C$


Note2: Guaranteed by characterization and design.

ET9528


Typical Characteristics

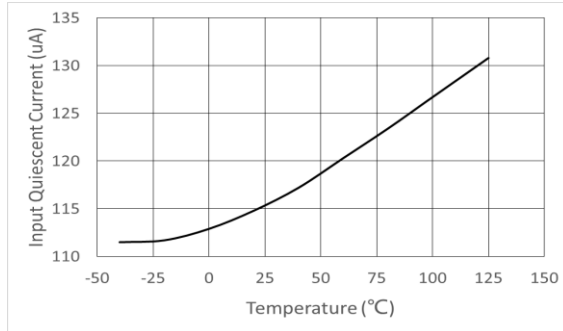


Input Quiescent Current vs. Temperature

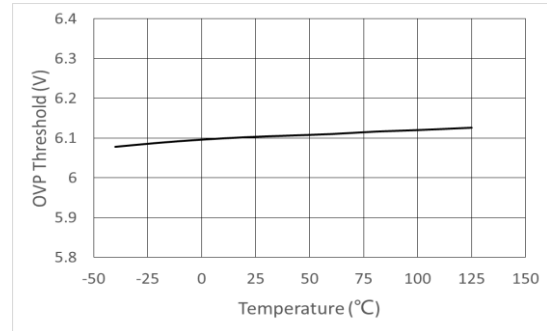


OVP threshold vs. Temperature

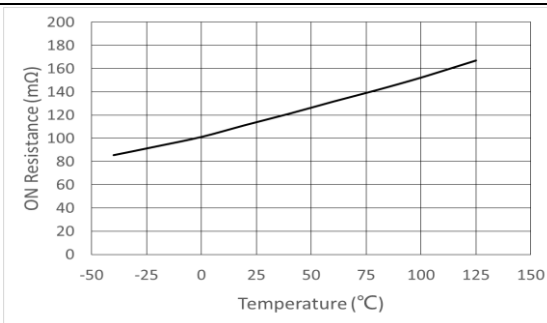


On Resistance vs. Temperature

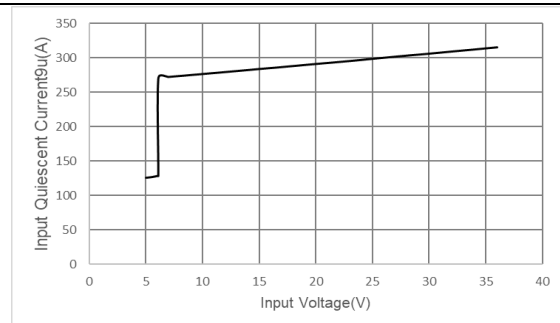


Input Quiescent Current vs. Input Voltage

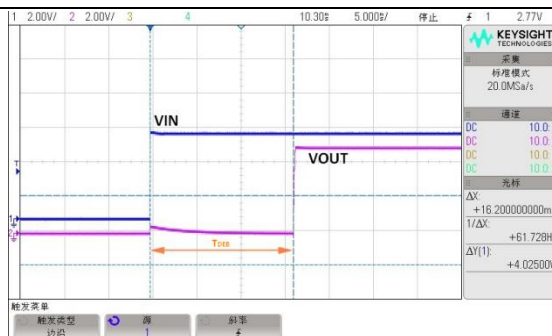


Power ON Debounce Time

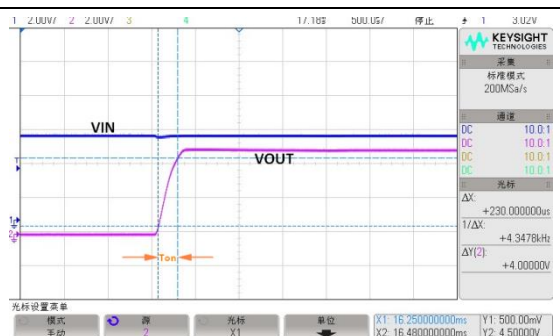

Switch Turn-on Time

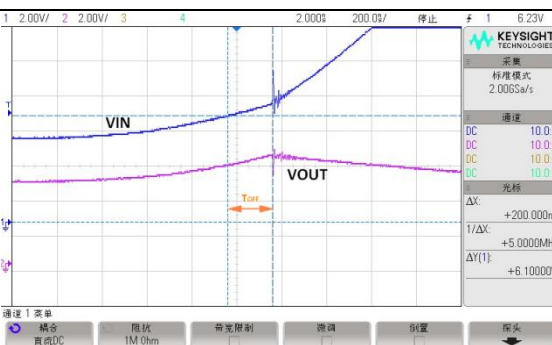


OVP Turn-off Response Time

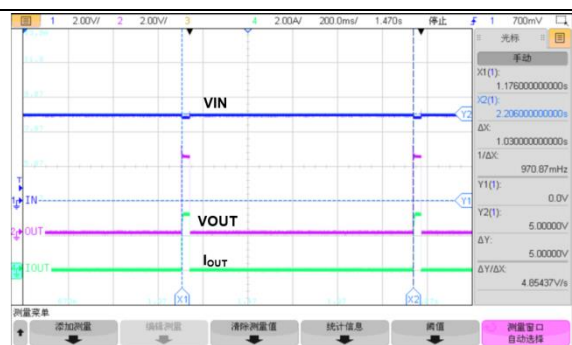


OCP Recovery

ET9528

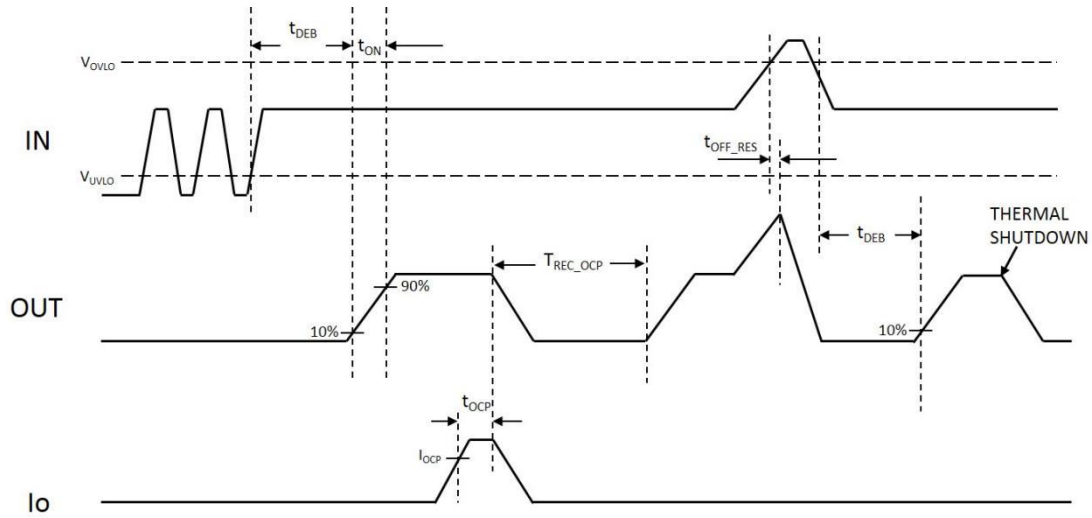

Note: Waveform are not to scale

Application Circuits

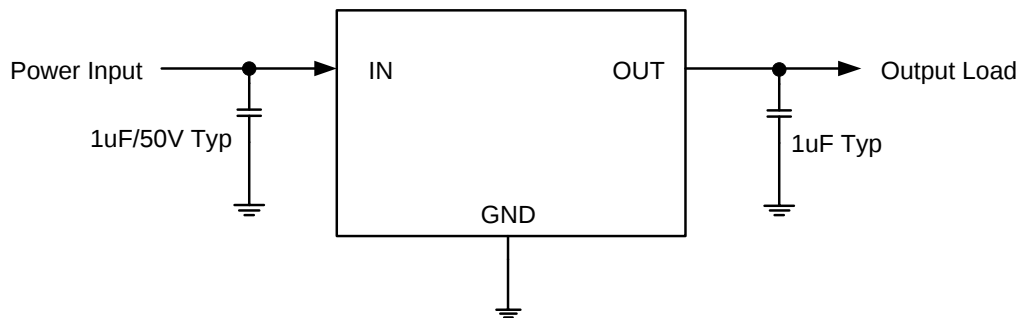

Note*:


Reference input and output capacitance value is 1uF.

This electric circuit only supplies for reference.

ET9528

Package Dimension

SOT23-6

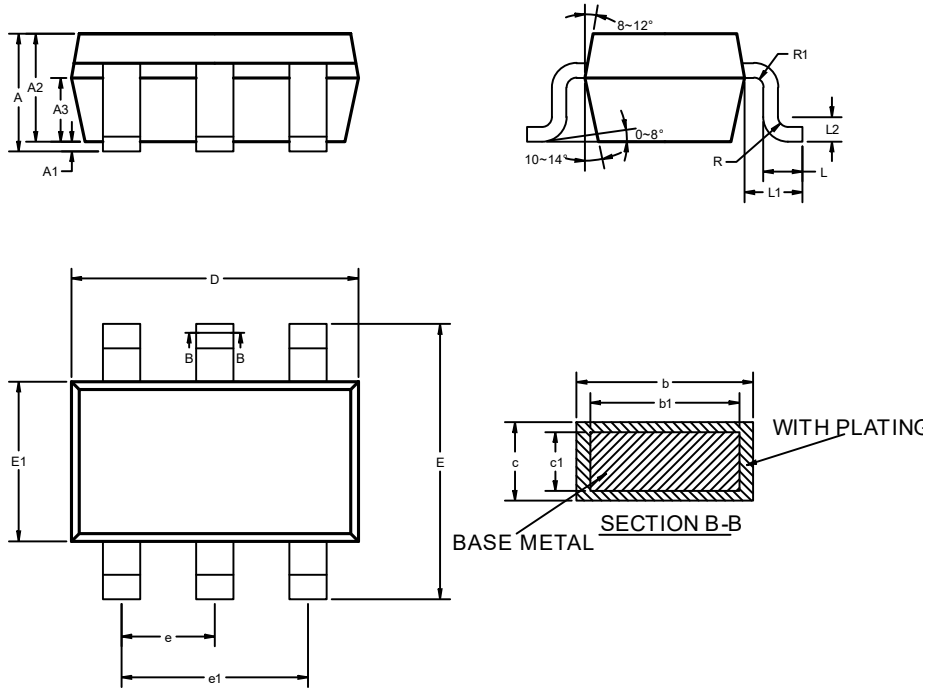

(Units :mm)

SYMBOL	MIN	NOM	MAX
A	—	—	1.250
A1	0	—	0.150
A2	1.000	1.100	1.200
A3	0.600	0.650	0.700
b	0.360	—	0.450
b1	0.350	0.380	0.410
c	0.140	—	0.200
c1	0.140	0.150	0.160
D	2.826	2.926	3.026
E	2.600	2.800	3.000
E1	1.526	1.626	1.726
e	0.900	0.950	1.000
e1	1.800	1.900	2.000
L	0.300	0.400	0.500
L1	0.590REF		
L2	0.250BSC		
R	0.050	—	0.200
R1	0.050	—	0.200

ET9528

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2017-12-25	Original Version	Yang Zhen	Yang Zhen	Zhu Jun Li
1.1	2019-06-14	Update working waveform	Yang Zhen	Yang Zhen	Zhu Jun Li
1.2	2021-03-19	Add Pin 1,5,6 Function note.	Yang Zhen	Yang Zhen	Zhu Jun Li
1.3	2022-8-5	Update Typeset	Shi Bo	Yang Zhen	Zhu Jun Li
1.4	2022-12-29	Update IV Curve	Shi Bo	Yang Zhen	Zhu Jun Li