

1A Low Dropout LDO with Adjustable Output

General Description

The ET5A0ADJY2B is CMOS-based low-dropout, low-power linear regulators, offering 1A with low dropout voltage, high ripple rejection, high output accuracy and low supply current. The ET5A0ADJY2B consist of an accurate voltage-reference block, an error amplifier, a voltage-setting resistor net, a PMOSFET pass device, a thermal-shutdown circuit, and a current limit circuit with short protection.

The ET5A0ADJY2B use a type of outstanding CMOS process to minimize the supply current. A low on-resistance PMOS pass device is equipped for lower dropout voltage. ET5A0ADJY2B also possess the EN function to save more energy and extend the battery life.

The ET5A0ADJY2B can choose the output current 1.0A. The output voltage can be adjusted from 0.75v to 4.3v using two external resistors.

The ET5A0ADJY2B is available in the DFN6 package (2mm×2mm).

Features

- Wide Input Voltage Range: 1.8V to 5.5V
- Output Current: 1.0A optional
- Adjustable Output Voltage Range: 0.75V to 4.3V
- Very Low IQ: 110μA
- Excellent Load/Line Transient Response
- Line Regulation: 0.02% typical
- Built-in Over-Current Protection and Thermal Shutdown Circuit
- Built-in Auto-discharging Circuit
- Reverse Current Protection
- Package: DFN6(2mm×2mm)

Applications

- Constant-Voltage Power Supply for Battery-Powered Device
- Constant-Voltage Power Supply for TV, notebook PC and Home Electric Appliance
- Constant-Voltage Power Supply for Portable Equipment
- Label Information


ET5A0ADJY2B

Device Information

ET 5A0 ADJ Y2 B

Output Voltage		Package		Auto-discharging Function	
<u>ADJ</u>	Adjustable Output	<u>Y2</u>	DFN6(2×2)	<u>B</u>	Available

Pin Configuration

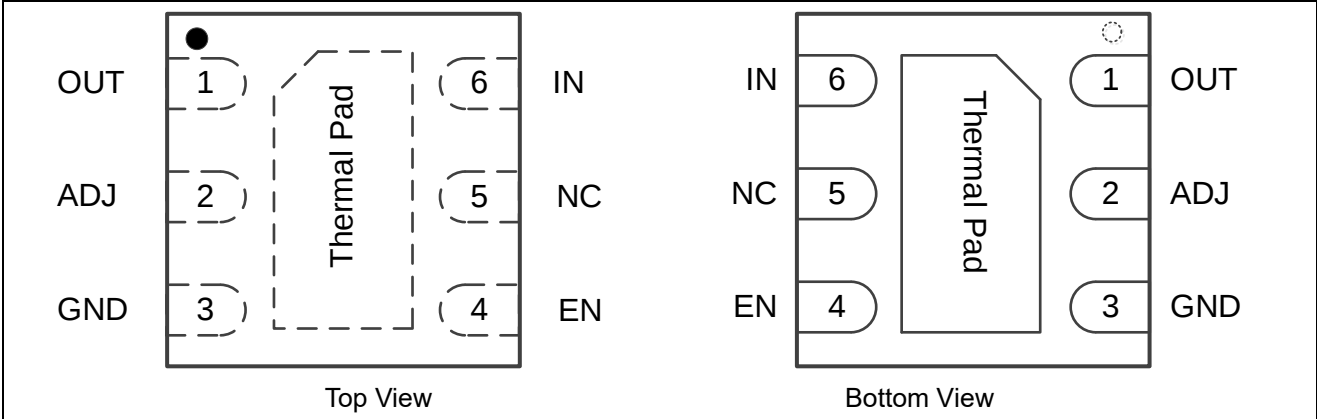


Pin Function

Pin	Symbol	Pin Description
1	OUT	Output Pin
2	ADJ	Adjustable Regulator Feedback Input. Connect to output voltage resistor divider central node.
3	GND	Ground Pin
4	EN	Chip Enable Pin
5	NC	No connect
6	IN	Input Pin
-	Thermal Pad	Thermal Pad, connect to GND

ET5A0ADJY2B

Block Diagram

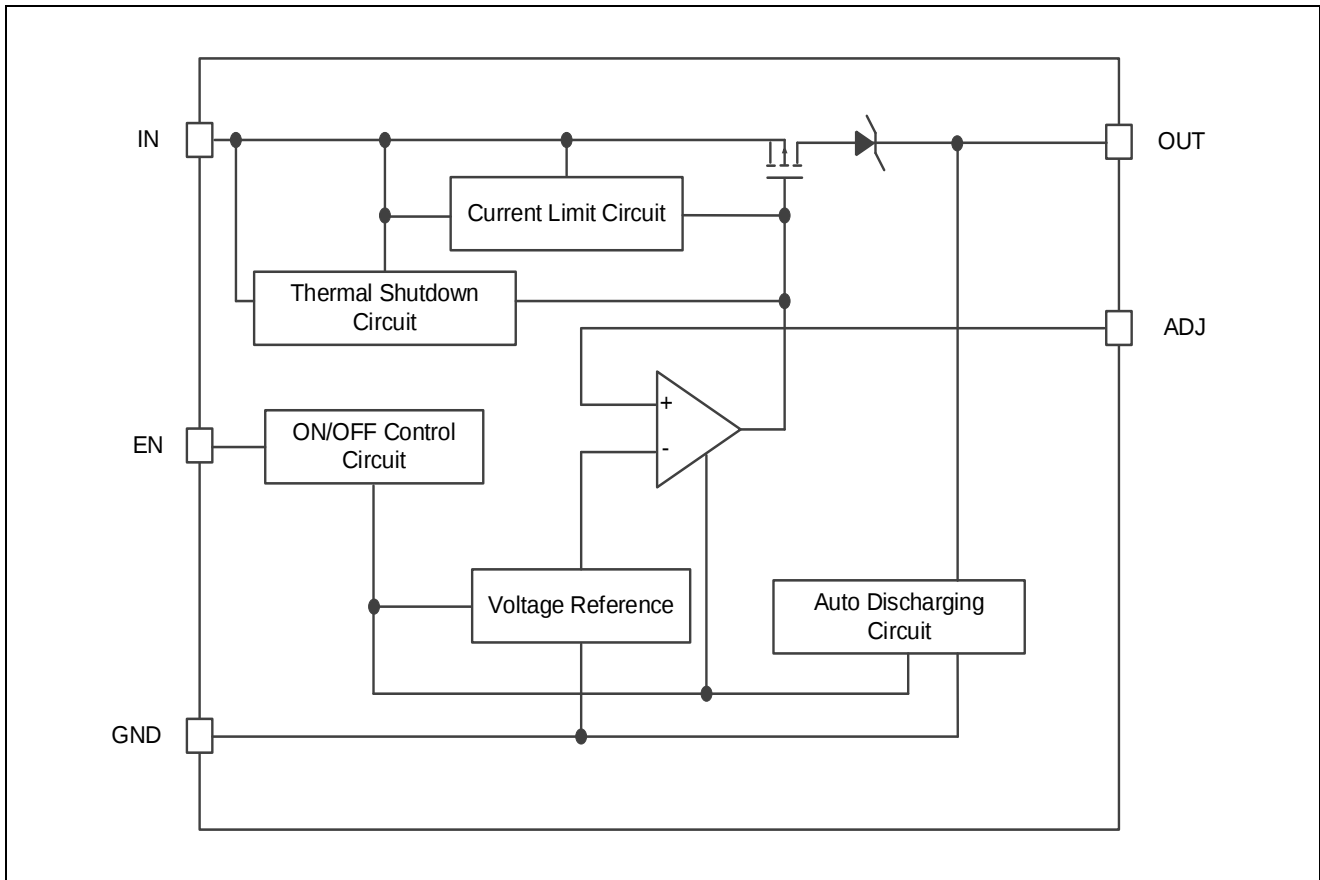

Functional Description

Input Capacitor

A 1 μ F ceramic capacitor is recommended to connect between VIN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND.

Please pay attention, in the case of high impedance of the power supply, the input capacitance of the IC is small or the capacitor is not connected, the oscillation may occur. When the capacitance value of the output capacitor is greater than the capacitance value of the input capacitor, it is possible to generate oscillation.

Output Capacitor

An output capacitor is required for the stability of the LDO. The recommended output capacitance is 1 μ F, ceramic capacitor is recommended, and temperature characteristics are X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to VOUT and GND pins.

EN Pin Operation

The ET5A0ADJY2B is turned on by setting the EN pin to "H". When the EN pin is used, connect the EN pin with VIN to keep the LDO in operating mode.

ET5A0ADJY2B

Current Limit Protection

When output current of VOUT pin is higher than current limit threshold or the VOUT pin is direct short to GND, the current limit protection will be triggered and clamp the output current at a predesigned level to prevent over-current and thermal damage. ET5A0ADJY2B output current limit will be 1.4A.

Thermal Shutdown Protection

Thermal protection disables the output when the junction temperature rises to approximately +155°C, allowing the device to cool down. When the junction temperature reduces to approximately +120°C the output circuit is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits the heat dissipation of the regulator, protecting it from damage due to overheating.

Reverse Current Protection Circuit

Under normal conditions, when VOUT is higher than VIN, the parasitic diode of Pch output transistor becomes forward direction. As a result, the current flows from VOUT pin to VIN pin.

The ET5A0ADJY2B switches the mode to the reverse current protection mode before VIN becomes lower than VOUT by connecting the parasitic diode of Pch output transistor to the backward direction, and connecting the gate to VOUT pin. As a result, the Pch output transistor is turned off. However, from VOUT pin to GND pin, via the internal divider resistors, very small current IREV flows.

Auto Discharging

When the EN pin set to “L”, the output circuit will be disable immediately, and the Auto-Discharging circuit will be turned on to discharge the electric charge on output capacitor, and decrease the voltage of VOUT in very short time. The Auto-Discharging function is optional.

Output Voltage

The output voltage is adjustable using external 2-resistors. For better performance of the circuit, the R2 value need to be between 30kΩ and 100kΩ. The output voltage is calculated by:


$$V_{OUT} = (1+R1/R2)*0.75 (V)$$

ET5A0ADJY2B

Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage(IN Pin)	-0.3 to 6	V
V_{EN}	Input Voltage (EN Pin)	-0.3 to 6	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN}+0.3$	V
I_{MAX}	Maximum Load Current	1000	mA
P_D	Maximum Power Consumption	1200	mW
$R_{\theta JA}$	Thermal Resistance, Junction-to-Ambient, $T_a=25^{\circ}\text{C}$	83	$^{\circ}\text{C/W}$
Ψ_{jt}	Thermal Resistance, Junction-to-Package Top	7	$^{\circ}\text{C/W}$
T_J	Operating Junction Temperature	-40 to 150	$^{\circ}\text{C}$
T_{STG}	Storage Temperature	-65 to 150	$^{\circ}\text{C}$
T_{SOLD}	Lead Temperature (Soldering, 5sec)	260	$^{\circ}\text{C}$
V_{ESD}	Human Body Model (JESD22-A114)	± 4000	V
	Charged Device Model (JESD22-C101)	± 1500	
L_U	EIA/JESD78E	± 200	mA

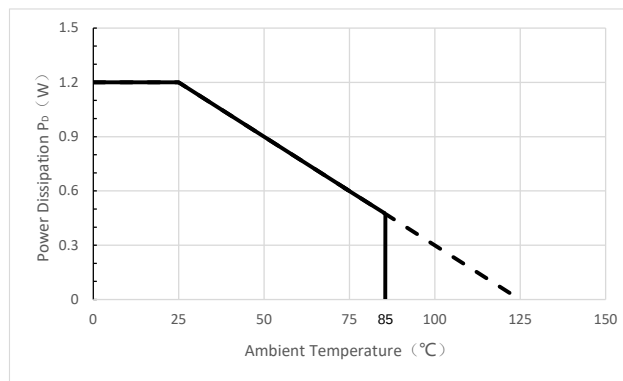

Power Dissipation

Recommended Operating Conditions

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	1.8 to 5.5	V
V_{OUT}	Output Voltage	1.8 to 5.5	V
I_{OUT}	Output Current	0 to 1000	mA
T_A	Operating Ambient Temperature	-40 to 85	$^{\circ}\text{C}$
C_{IN}	Effective Input Ceramic Capacitor Value	1 to 10	μF
C_{OUT}	Effective Output Ceramic Capacitor Value	1 to 10	μF
ESR	Input and Output Capacitor Equivalent Series Resistance	5 to 100	m Ω

ET5A0ADJY2B

Electrical Characteristics

(Unless otherwise noted, $V_{IN} = V_{SET} + 1.0V$, $T_A = -40^{\circ}C \sim 85^{\circ}C$, $C_{IN} = C_{OUT} = 1\mu F$ (effective capacitance ⁽⁴⁾); Typical values are at $V_{IN} = V_{SET} + 1.0V$, $T_A = 25^{\circ}C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Input Voltage Operation Range	$V_{IN}^{(1)}$	$V_{IN} \geq V_{SET} + 0.5V$	1.8		5.5	V
Output Voltage	V_{OUT}	$I_{OUT} = 1mA, T_A = 25^{\circ}C$	$\times 0.98$		$\times 1.02$	V
		$I_{OUT} = 1mA \sim 1A, T_A = 25^{\circ}C$	-30		+30	mV
Dropout Voltage	$V_{DROP}^{(2)}$	$V_{OUT} = 3.3V, I_{OUT} = 1A$, V_{OUT} dropping to $0.98 \times V_{OUT}$	60	135	210	mV
Supply Quiescent Current	I_{Q_ON}	Active mode: $V_{EN} = high, I_{OUT} = 0mA$	70	110	150	μA
Supply Shutdown Current	I_{Q_OFF}	$V_{EN} = 0V$		1	3	μA
Output Voltage Line Regulation	Reg_{LINE}	$V_{SET} + 0.5V \leq V_{IN} \leq 5.5V$ ($V_{IN} \geq 1.8V$), $I_{OUT} = 10mA$ ($\Delta V_{OUT} / \Delta V_{IN} / V_{OUT}$)		0.02	0.1	%/V
Output Voltage Load Regulation	Reg_{LOAD}	I_{OUT} from 1mA to 1A $V_{IN} = V_{set} + 0.5V$ (ΔV_{OUT})		5	30	mV
Line Transient (The absolute value of the output change)	$V_{TRLN}^{(3)}$	$V_{OUT} = 3.3V, I_{OUT} = 1mA$, $V_{IN} = 4.3V$ to $5.5V$ in $10\mu s$, $T_A = 25^{\circ}C$		15	30	mv
		$V_{OUT} = 3.3V, I_{OUT} = 1mA$, $V_{IN} = 5.5V$ to $4.3V$ in $10\mu s$, $T_A = 25^{\circ}C$		15	30	
Load Transient (The absolute value of the output change)	$V_{TRLD}^{(3)}$	$V_{OUT} = 3.3V, V_{IN} = 4.3V$, I_{OUT} from 1mA to 1000mA in $10\mu s, T_A = 25^{\circ}C$		75	120	mv
		$V_{OUT} = 3.3V, V_{IN} = 4.3V$, I_{OUT} from 1000mA to 1mA in $10\mu s, T_A = 25^{\circ}C$		75	120	
Output Current	I_{OUT}		1000			mA
Max Output Instant Current	$I_{INSTANT}^{(3)}$	$V_{OUT} = 3.3V, V_{IN} = 4.3V$, $T_A = 25^{\circ}C$	1500			mA
Short Current Limit	I_{SHORT}	$V_{OUT} = 0V, T_A = 25^{\circ}C$	60	130	200	mA
Inrush Current Limit	I_{RUSH}	$V_{OUT} = 3.3V, V_{IN} = 4.3V$, $T_A = 25^{\circ}C$	400	600	800	mA
Power Supply Rejection Ratio	$PSRR^{(3)}$	$f = 1kHz, C_{OUT} = 1\mu F$, $I_{OUT} = 20mA$, $V_{IN} = 4.3V, T_A = 25^{\circ}C$		70		dB

ET5A0ADJY2B

Electrical Characteristics (Continued)

(Unless otherwise noted, $V_{IN} = V_{SET} + 1.0V$, $T_a = -40^{\circ}C \sim 85^{\circ}C$, $C_{IN} = C_{OUT} = 1\mu F$ (effective capacitance ⁽⁴⁾); Typical values are at $V_{IN} = V_{SET} + 1.0V$, $T_a = 25^{\circ}C$)

Parameter	Symbol	Test Conditions	Min	Typ	Max	Unit
Output Noise	e_N ⁽³⁾	10Hz to 100kHz, $I_{OUT} = 30mA$, $C_{OUT} = 1\mu F$, $T_A = 25^{\circ}C$		50* V_{OUT}	80* V_{OUT}	μV_{RMS}
EN Low Threshold	V_{IL}	$V_{IN} = 1.8$ to $5.5V$			0.3	V
EN High Threshold	V_{IH}	$V_{IN} = 1.8$ to $5.5V$	1.0			V
EN Pull-down Current	I_{EN}	$V_{IN} = 4.3V$, $V_{EN} = 4.3V$, $T_A = 25^{\circ}C$		0.3	1.0	μA
Output resistance of auto discharge at off state	R_{LOW}	$V_{EN} = 0V$, $V_{IN} = 4V$, $V_{OUT} = 3V$	30	60	100	Ω
Soft start time	T_{ON}	$V_{OUT} = 3.3V$, from enable to $0.9 \cdot V_{OUT}$	40	90	180	us
V_{OUT} rising time	T_R	$V_{OUT} = 3.3V$, from $0.1 \cdot V_{OUT}$ to $0.9 \cdot V_{OUT}$	30	60	120	
Thermal Shutdown Temperature	T_{TSD} ⁽³⁾	Junction Temperature Rising	135	155	175	$^{\circ}C$
Thermal Shutdown Released hysteresis	T_{HYS} ⁽³⁾	Junction Temperature falling from shutdown	20	40	60	$^{\circ}C$


Note (1): V_{IN} means internal circuit can work normal. If $V_{IN} < V_{OUT}$, Reverse current protection circuit will work.

Note (2): V_{DROP} FT test method: test the V_{OUT} voltage at $V_{SET} + V_{DROPMAX}$ with output current.

Note (3): Guaranteed by design and characterization. not a FT item.

Note (4): Effective capacitance, including the effect of DC bias, tolerance and temperature.

Application Circuits

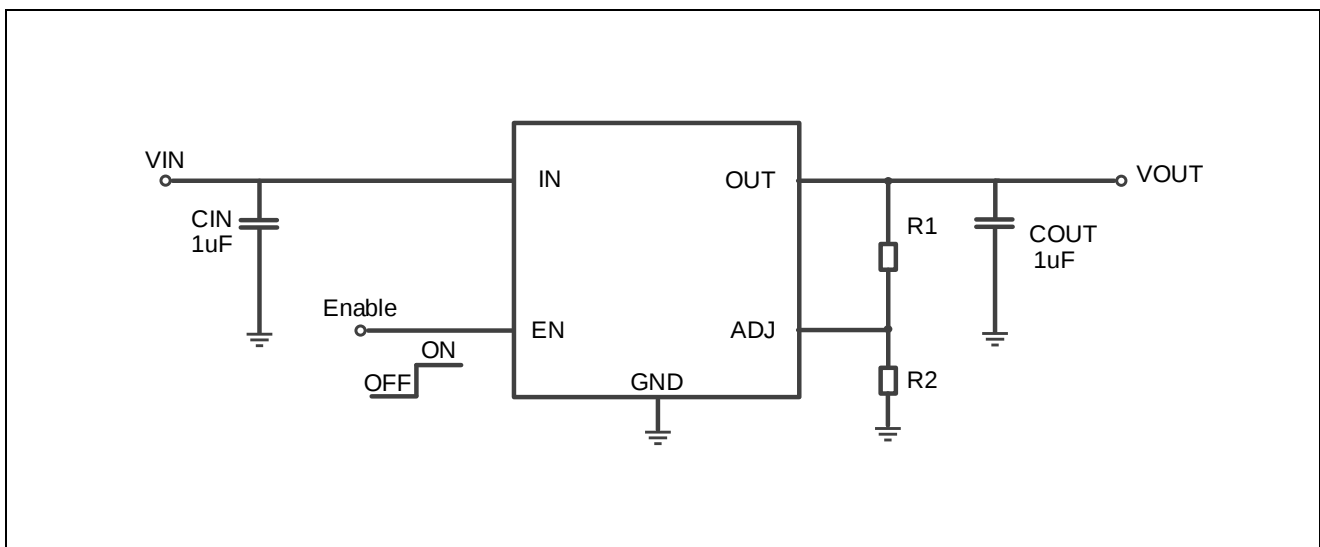


*: $V_{OUT} = (1 + R1/R2) \times 0.75V$, $R2$ recommend $30K\Omega \sim 100K\Omega$.

ET5A0ADJY2B


Typical Characteristics

(Unless otherwise noted, $V_{IN} = V_{SET} + 1.0V$, $T_a = -40^{\circ}C \sim 85^{\circ}C$, $C_{IN} = C_{OUT} = 1\mu F$ (effective capacitance ⁽⁴⁾); Typical values are at $V_{IN} = V_{SET} + 1.0V$, $T_a = 25^{\circ}C$)


$V_{OUT} = 3.3V$

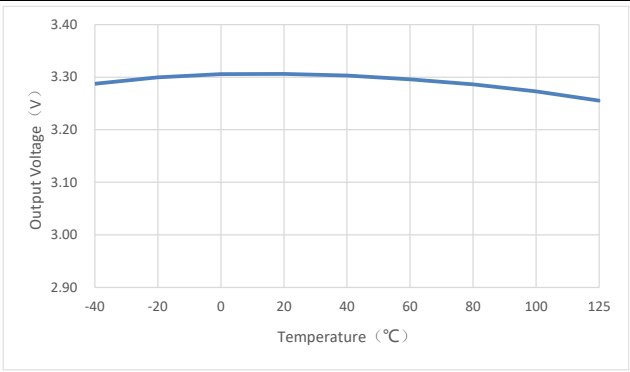


Output Voltage vs. Temperature

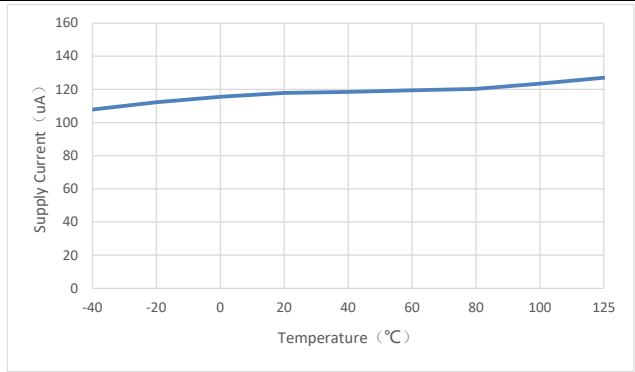


Supply Current vs. Temperature

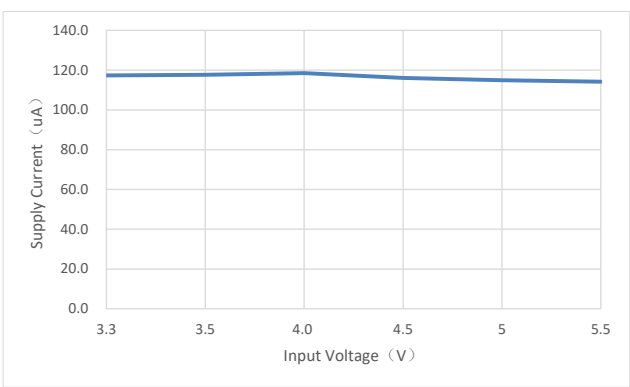


Supply Current vs. Input Voltage

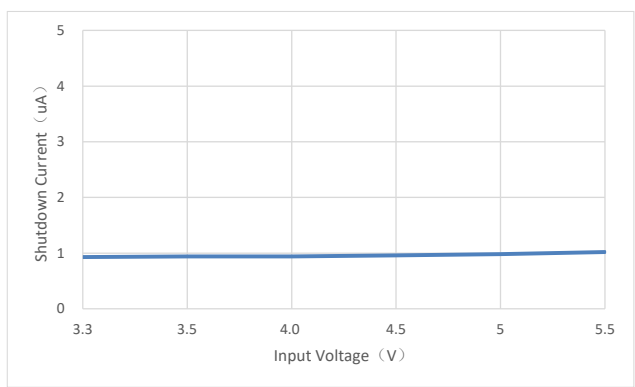

Shutdown Current vs. Input Voltage

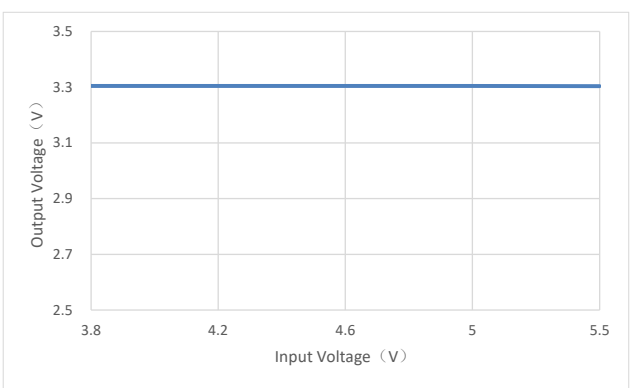

Output Voltage vs. Input Voltage

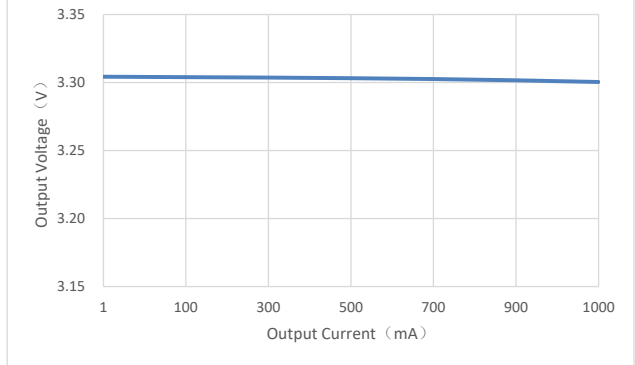


Output Voltage vs. Output Current

ET5A0ADJY2B


Typical Characteristics(continued)

(Unless otherwise noted, $V_{IN} = V_{SET} + 1.0V$, $T_a = -40^{\circ}C \sim 85^{\circ}C$, $C_{IN} = C_{OUT} = 1\mu F$ (effective capacitance ⁽⁴⁾); Typical values are at $V_{IN} = V_{SET} + 1.0V$, $T_a = 25^{\circ}C$)


$V_{OUT} = 3.3V$

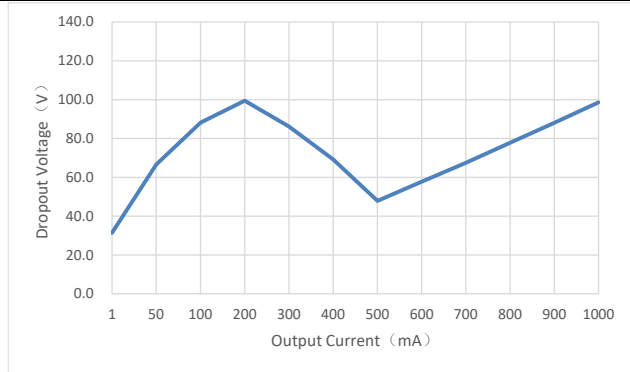


Dropout Voltage vs. Output Current

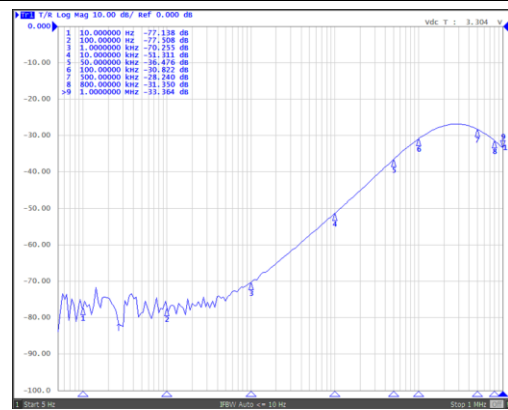


PSRR-20mA

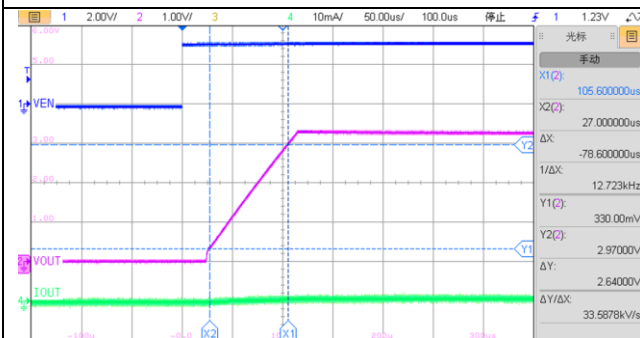


Ton

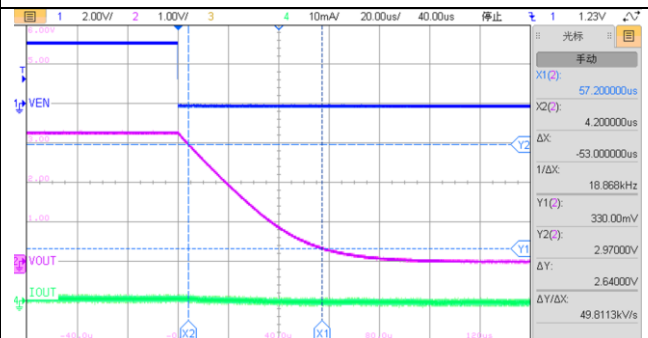


Toff

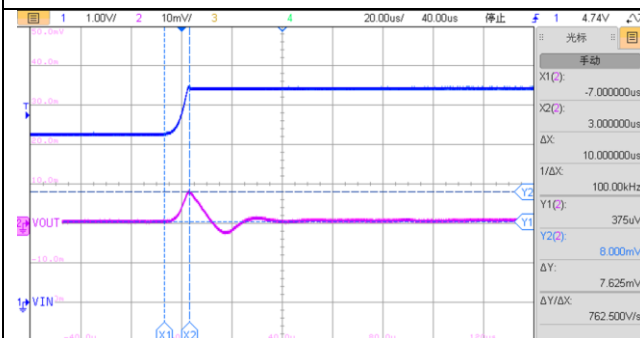


Line transient VIN=4.3V to 5.5V

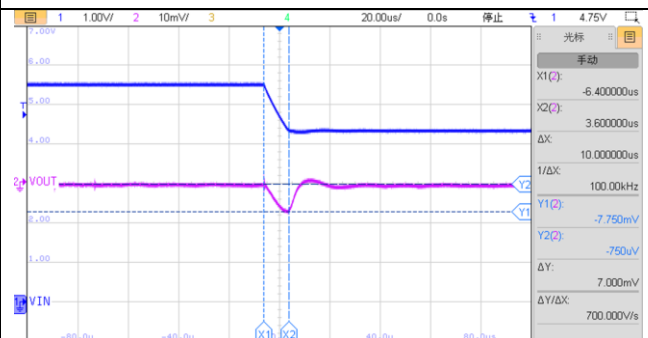

Line transient VIN=5.5V to 4.3V

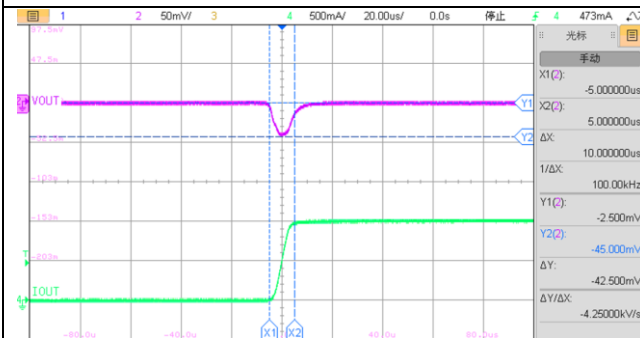

Load transient IOUT=1mA to 1A

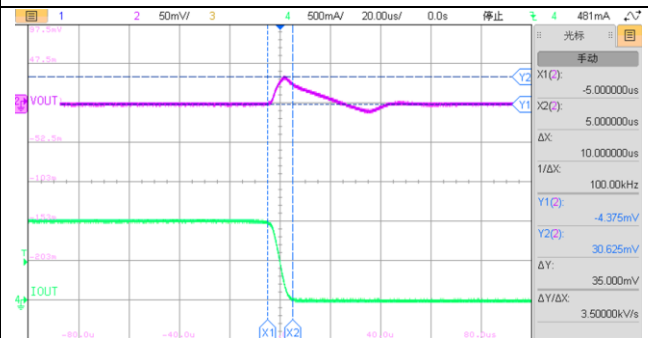


Load transient IOUT=1A to 1mA

ET5A0ADJY2B

Package Dimension

DFN6

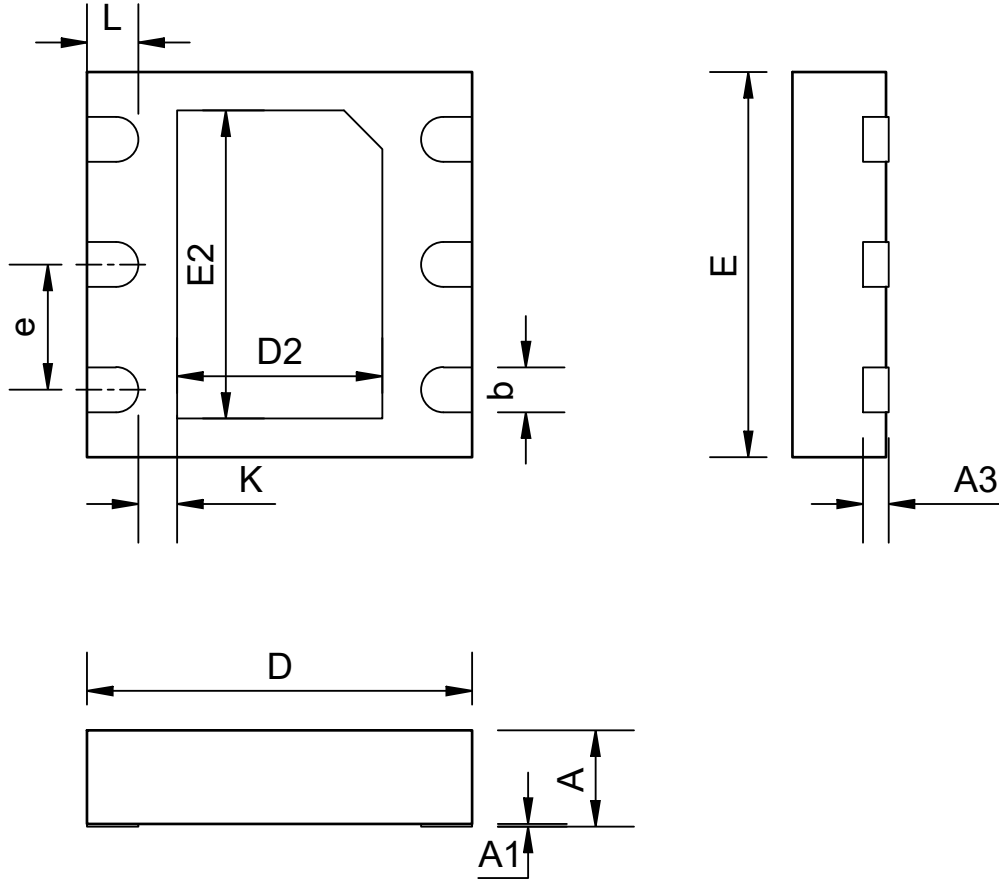


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)


SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.20REF		
b	0.25	0.35	0.45
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.65	0.80	0.90
E2	1.35	1.50	1.60
e	0.65BSC		
L	0.30	0.35	0.40
k	0.20	--	--

ET5A0ADJY2B

Tape Information

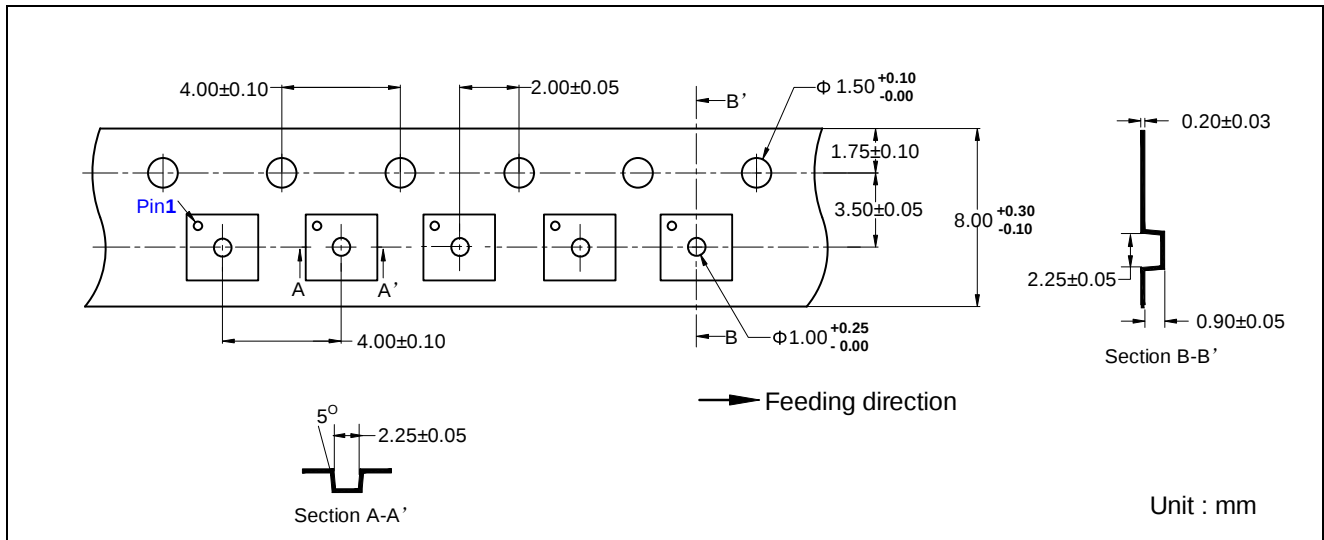

Marking

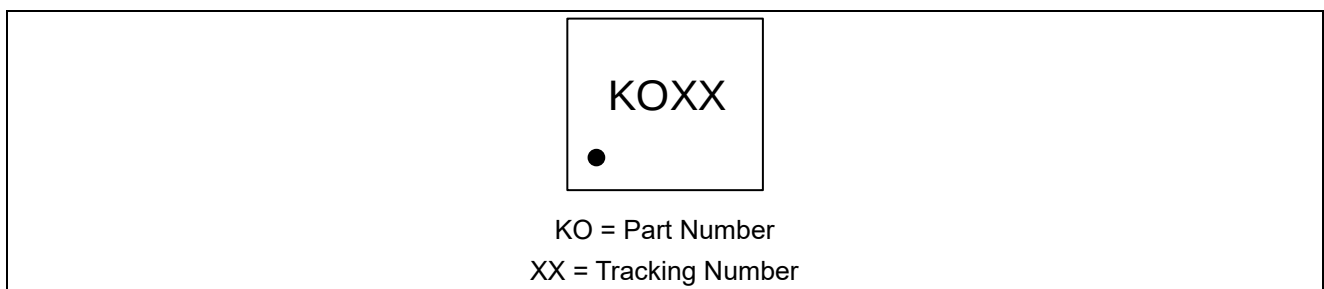

Package Information

Qty: 3K/Reel

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2020-12-28	Initial version	Liuyg	Liuyg	Liujy
1.1	2022-07-20	Update Typeset Update TJ	Shib ,Liwc	Liuyg	Liujy
1.2	2024-04-10	Add Ton & T _R	Yangxx	Liuyg	Liujy
1.3	2024-04-23	Add R _{θJA} & characteristic curve	Yangxx	Liuyg	Liujy
1.4	2024-07-09	Add Tape & Marking Update Format	Tugz	Liuyg	Liujy