

Very-Low Dropout High PSRR 1A LDO

General Description

ET5A0XX series are the fixed output 1A LDO with auto discharge function, it uses an advanced CMOS process and a PMOSFET pass device to achieve high power supply rejection ratio (PSRR), low noise, very low dropout, fast start-up and excellent output accuracy.

ET5A0XX series are stable with a 1.0~10 μ F ceramic output capacitor, uses a precision voltage reference and feedback loop to achieve excellent Regulation and transient response. It can choose the output current between 500mA and 1A by setting the LCON pin to high or low (only some package have this function).

ET5A0XX series are offered SOT23-5, SOT89-5, SOT-223, DNF6(2 $\times$ 2), DNF8(1.2 $\times$ 1.6), HSOP8 packages

Features

- Wide input voltage range from 1.8V to 5.5V
- Output current 500mA/1A optional
- Output Voltage is 1.2V 1.75V 1.8V 2.8V 3.0V 3.3V ADJ(0.75V to 4.3V) etc
- Low I_Q is typical 110 μ A
- Excellent load/line transient response
- Low dropout voltage is 135mV@1A/3.3V output current
- Built-in over-current protection and thermal shutdown circuit
- Built-in inrush current suppression circuit and current limit circuit
- Reverse current protection

Applications

- Constant-voltage power supply for battery-powered device
- Constant-voltage power supply for TV, notebook PC and home electric appliance
- Constant-voltage power supply for portable equipment
- Label Information


ET5A0XX

Device Information

ET 5A0 XX X B

Output Voltage		Package			Auto-discharging Function	
<u>XX</u>	X.XV/ADJ fixed output	<u>X</u>	<u>S5</u>	SOT23-5	<u>B</u>	Available
			<u>!</u>	SOT89-5		
			<u>I</u>	SOT223		
			<u>Y2</u>	DFN6(2×2)		
			<u>Y</u>	DFN8(1.2×1.6)		
			<u>M</u>	HSOP8		

Pin Configuration

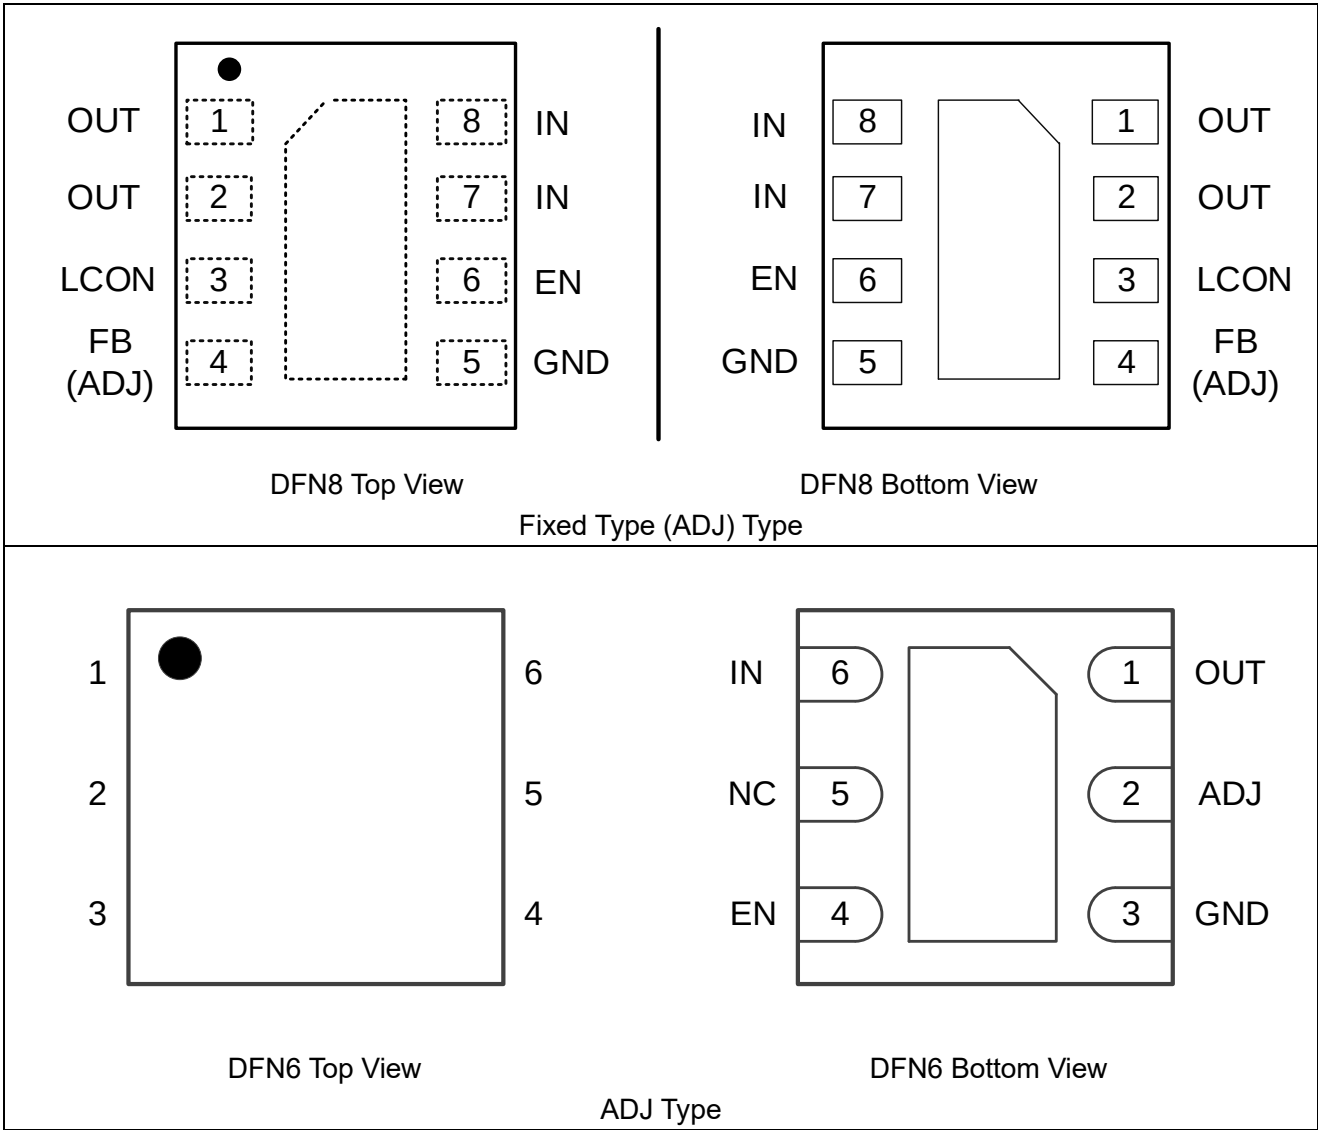

Fixed Type (ADJ) Type

1

2

3

6

5

4

DFN6 Top View

IN

NC

EN

6

5

4

1

2

3

OUT


ADJ

GND

DFN6 Bottom View

ADJ Type

ET5A0XX

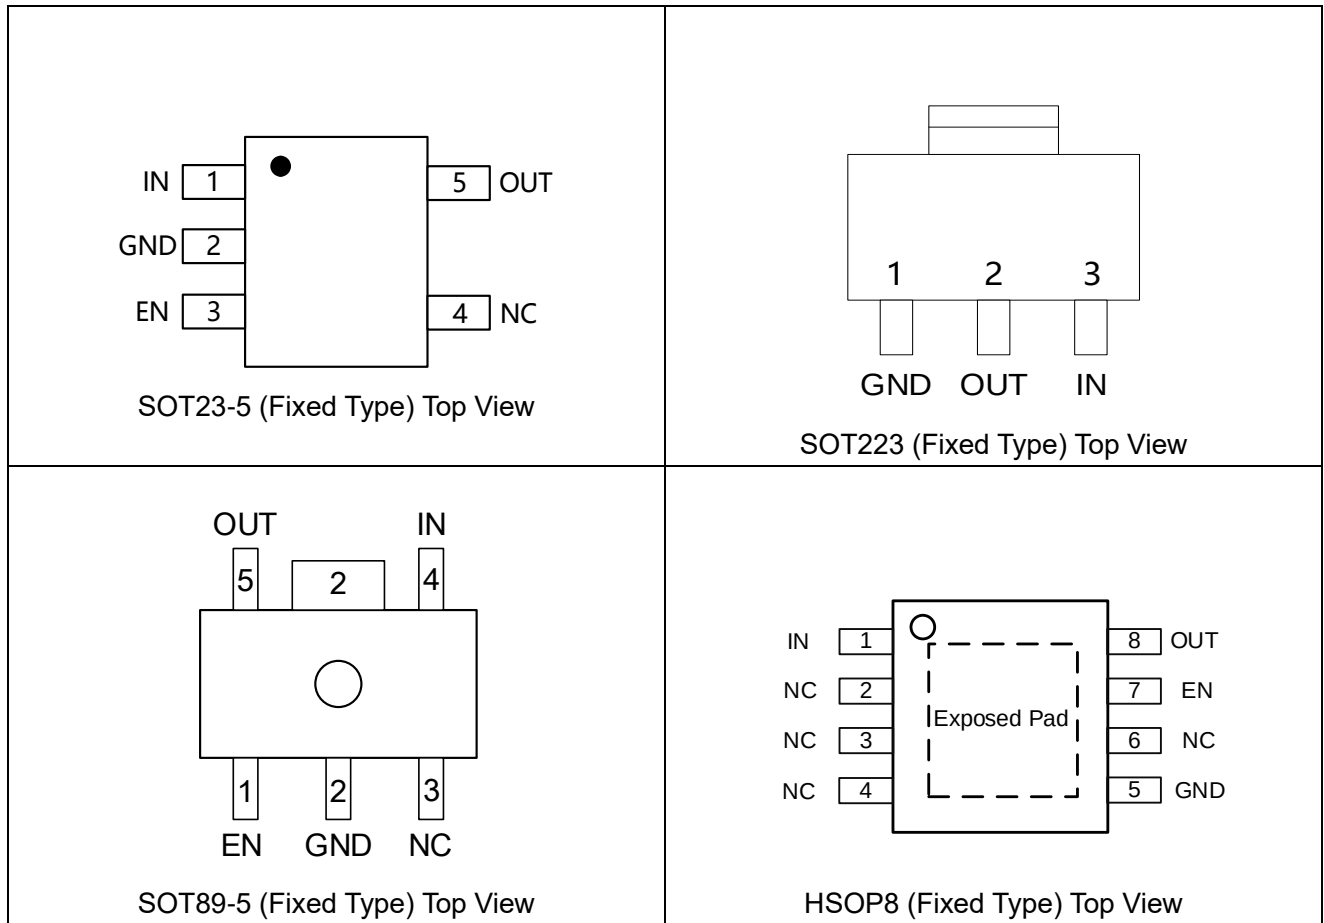


Pin Function

Pin No.							Pin Name	Pin Function
SOT23-5	SOT89-5	SOT223	DFN6 ADJY2B	DFN8		HSOP8		
				XXYB	ADJYB			
2	2	1	3	5	5	5	GND	Ground Pin
5	5	2	1	1/2	1/2	8	OUT	Output Pin
1	4	3	6	7/8	7/8	1	IN	Input Pin
3	1		4	6	6	7	EN	Chip Enable Pin
4	3		5			2/3/4/6	NC	No connect
				4			FB	VOUT Feedback Pin
			2		4		ADJ	Adjustable Regulator Feedback Input. Connect to output voltage resistor divider central node.
				3	3		LCON	Output Current Limit Alternate Pin ("H" =1A, "L" =500mA)

ET5A0XX

Block Diagram

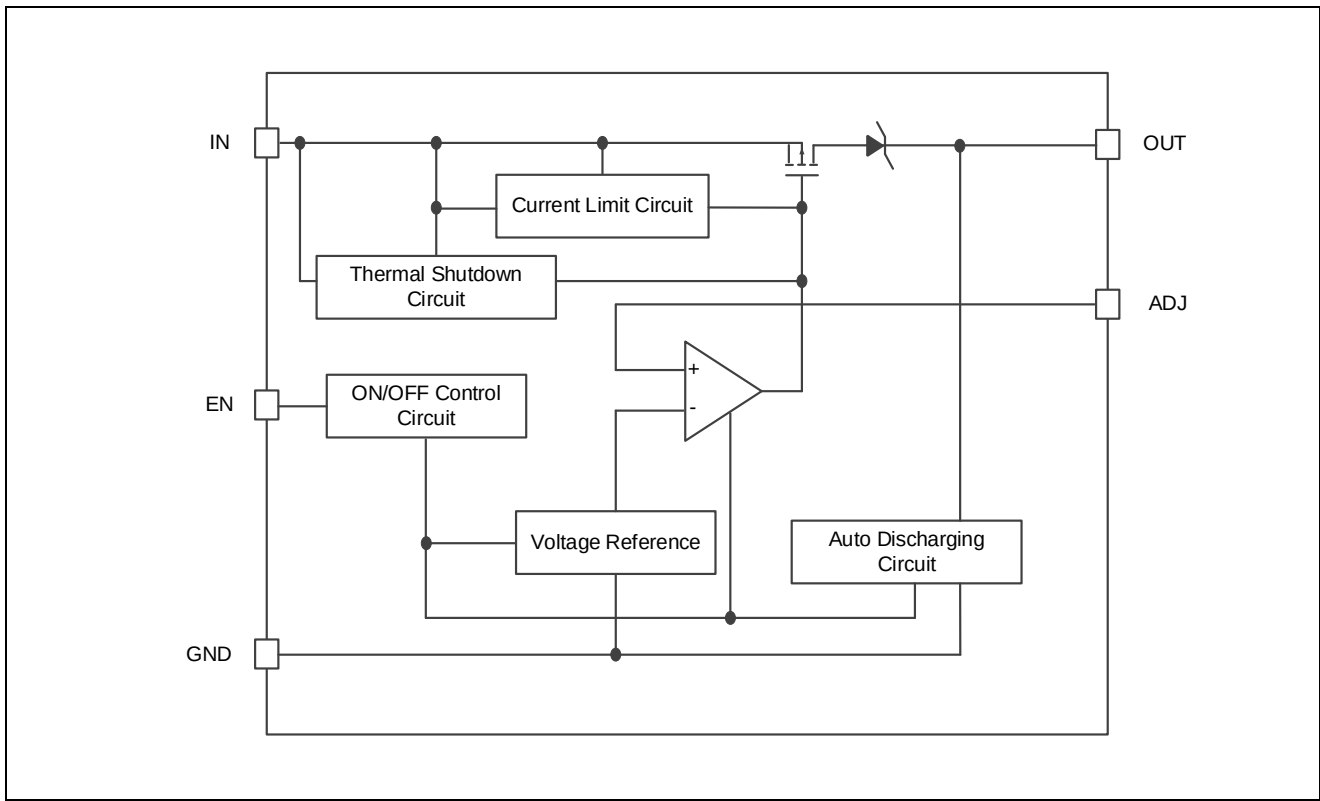

Functional Description

Input Capacitor

A 1~10 μ F ceramic capacitor is recommended to connect between VIN and GND pins to decouple input power supply glitch and noise. The amount of the capacitance may be increased without limit. This input capacitor must be located as close as possible to the device to assure input stability and less noise. For PCB layout, a wide copper trace is required for both VIN and GND.

Please pay attention, in the case of high impedance of the power supply, the input capacitance of the IC is small or the capacitor is not connected, the oscillation may occur. When the capacitance value of the output capacitor is greater than the capacitance value of the input capacitor, it is possible to generate oscillation.

Output Capacitor

An output capacitor is required for the stability of the LDO. The recommended output capacitance is 1~10 μ F, ceramic capacitor is recommended, and temperature characteristics are X7R or X5R. Higher capacitance values help to improve load/line transient response. The output capacitance may be increased to keep low undershoot/overshoot. Place output capacitor as close as possible to VOUT and GND pins.

EN Pin Operation

The ET5A0XX is turned on by setting the EN pin to "H". Since the EN pin is neither pulled down nor pulled up internally, do not set it in floating status. When the EN pin is not used, connect the EN pin with VIN to keep the LDO in operating mode.

Current Limit Protection

ET5A0XX

When output current of VOUT pin is higher than current limit threshold or the VOUT pin is direct short to GND, the current limit protection will be triggered and clamp the output current at a predesigned level to prevent over-current and thermal damage.

When setting the LCON pin (ET5A0XXYB) to “H”, ET5A0XX output current limit will be 1A(min), When setting the LCON pin to “L”, ET5A0XX output current limit will be 500mA(min).

Thermal Shutdown Protection

Thermal protection disables the output when the junction temperature rises to approximately +155°C, allowing the device to cool down. When the junction temperature reduces to approximately +120°C the output circuit is enabled again. Depending on power dissipation, thermal resistance, and ambient temperature, the thermal protection circuit may cycle on and off. This cycling limits the heat dissipation of the regulator, protecting it from damage due to overheating.

LCON Pin Operation

LCON pin (ET5A0XXYB) can be set to different current limit by alternating the LCON pin to “H” or “L”. When setting the LCON pin to “H”, the output current limit will be 1A(min), the short current limit will be 110mA, and the IRUSH 500mA; If “L” is set, the output current limit will change to 500mA(min), the short current limit and IRUSH will become 60mA and 300mA respectively.

Reverse Current Protection Circuit

If VOUT is higher than VIN, the parasitic diode of Pch output transistor becomes forward direction. As a result, the current flows from VOUT pin to VIN pin.

The ET5A0XX series switches the mode to the reverse current protection mode before VIN becomes lower than VOUT by connecting the parasitic diode of Pch output transistor to the backward direction, and connecting the gate to VOUT pin. As a result, the Pch output transistor is turned off. However, from VOUT pin to GND pin, via the internal divider resistors, very small current IREV flows.

Adjustable Output Voltage

The output voltage of ET5A0ADJ is adjustable using external 2-resistors. For better performance of the circuit, the R2 value need to be between 30kΩ and 100kΩ. The output voltage is calculated by:

$$VOUT = (1+R1/R2)*0.75 (V)$$

ET5A0XX

Absolute Maximum Ratings

Stresses beyond those listed under “Absolute Maximum Ratings” may cause permanent damage to the device. These are stress ratings only and functional operation of the device at these or any other condition beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Symbol	Parameter	Rating	Unit
V_{IN}	Input Voltage	-0.3 to 6	V
V_{EN}	Input Voltage (EN Pin)	-0.3 to 6	V
V_{OUT}	Output Voltage	-0.3 to $V_{IN}+0.3$	V
I_{MAX}	Maximum Load Current	1000	mA
P_D	Maximum Power Consumption	1200	mW
T_J	Operating Junction Temperature	-40 to 150	°C
T_{STG}	Storage Temperature	-65 to 150	°C
T_{SOLD}	Lead Temperature (Soldering, 5sec)	260	°C

Recommended Operating Conditions

Symbol	Item	Rating	Unit
V_{IN}	Input Voltage	1.8 to 5.5	V
I_{OUT}	Output Current	0 to 1000	mA
T_A	Operating Ambient Temperature	-40 to 85	°C
C_{IN}	Effective Input Ceramic Capacitor Value	1 to 10	μF
C_{OUT}	Effective Output Ceramic Capacitor Value	1 to 10	μF
ESR	Input and Output Capacitor Equivalent Series Resistance	5 to 100	mΩ

Electrical Characteristics

$V_{IN}=V_{OUT}+1.0V$, $I_{OUT}=1mA$, $C_{IN}=C_{OUT}=1\mu F$, unless otherwise noted, $T_A=25^{\circ}C$

Symbol	Item	Conditions	Min.	Typ.	Max.	Unit
V_{OUT}	Output Voltage		$\times 0.98$		$\times 1.02$	V
V_{IN}	Input Voltage ⁽¹⁾		1.8		5.5	V
I_{LIM}	Output Current Limit	$V_{IN}=V_{OUT}+0.5V$	LCON = L	500		mA
			LCON = H	1000		mA
ΔV_{LINE}	Line Regulation	$V_{OUT}+0.5V \leq V_{IN} \leq 5.5V$		0.02		%/V
ΔV_{LOAD}	Load Regulation	$V_{IN}=V_{OUT}+0.5V$, $1mA \leq I_{OUT} \leq 1A$		5	40	mV
V_{DIF}	Dropout Voltage ⁽²⁾	$1.2V \leq V_{OUT} < 2.6V$, $I_{OUT}=1A$, V_{OUT} dropping to $0.98 \times V_{OUT}$		170	220	mV
		$2.6V \leq V_{OUT} < 3.3V$, $I_{OUT}=1A$, V_{OUT} dropping to $0.98 \times V_{OUT}$		150	185	mV
		$3.3V \leq V_{OUT} \leq 4.3V$, $I_{OUT}=1A$, V_{OUT} dropping to $0.98 \times V_{OUT}$		135	170	mV

ET5A0XX

I _{Q_ON}	Supply Current	I _{OUT} = 0mA		110		μA
I _{Q_OFF}	Standby Current	V _{EN} = 0V		1	3	μA
PSRR	Ripple Rejection ⁽³⁾	f=1kHz, Ripple 0.2Vp-p, V _{IN} =V _{OUT} +1.0V, I _{OUT} =30mA		70		dB
e _N	Output Noise ⁽³⁾	10Hz to 100kHz, I _{OUT} =30mA		50	80	μV _{RMS}
I _{SC}	Short Current Limit	V _{OUT} =0V	LCON = L	60		mA
			LCON = H	110		
I _{RUSH}	Inrush Current Limit		LCON = L	300		mA
			LCON = H	500		
I _{EN}	EN Pull-down Current				1	μA
V _{IH_EN}	EN Input Voltage High	1.0				V
V _{IL_EN}	EN Input Voltage Low				0.3	V
V _{IH_LCON}	LCON Input Voltage High	1.0				V
V _{IL_LCON}	LCON Input Voltage Low				0.3	V
I _{LCON}	LCON Pull-down Current				1	μA
R _{DIS}	Auto-discharge Resistance	V _{IN} = 4V, V _{EN} = 0V		60		Ω
T _{TSD}	Thermal Shutdown Temperature			155		°C
T _{TSR}	Thermal Shutdown Released Temperature			120		°C

Note (1): Here V_{IN} means internal circuit can work normal. If V_{IN} < V_{OUT},
Reverse current protection circuit will work.

Note (2): V_{DROP} FT test method: test the V_{OUT} voltage at V_{SET} +V_{DROP}MAX with output current.


Note (3): Guaranteed by design and characterization. not a FT item.

ET5A0XX


Typical Characteristics

Note: Typical Characteristics are intended to be used as reference data; they are not guaranteed.


($V_{IN} = 4.3V$, $V_{OUT} = 3.3V$, $I_{OUT} = 1mA$, $C_{IN} = C_{OUT} = \text{Ceramic } 1.0\mu F$)

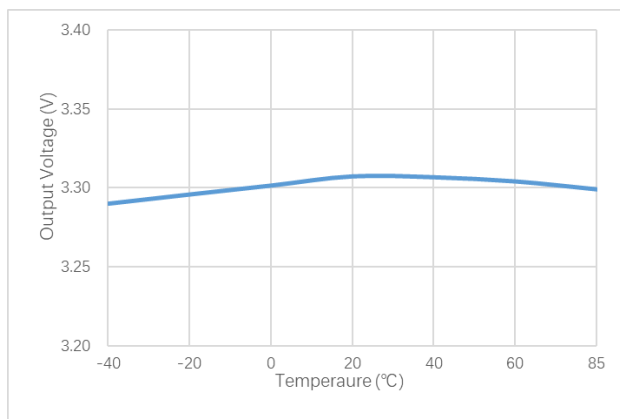


Output Voltage vs. Temperature

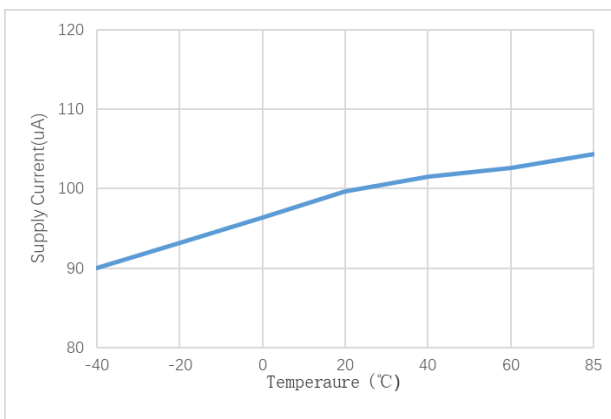


Supply Current vs. Temperature

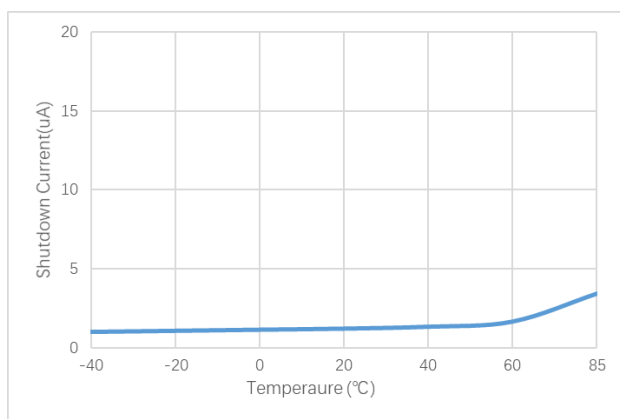


Shutdown Current VS Temperature

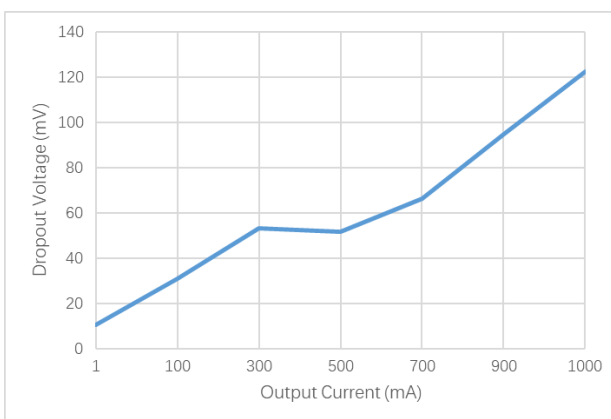

Dropout Voltage vs. Output Current

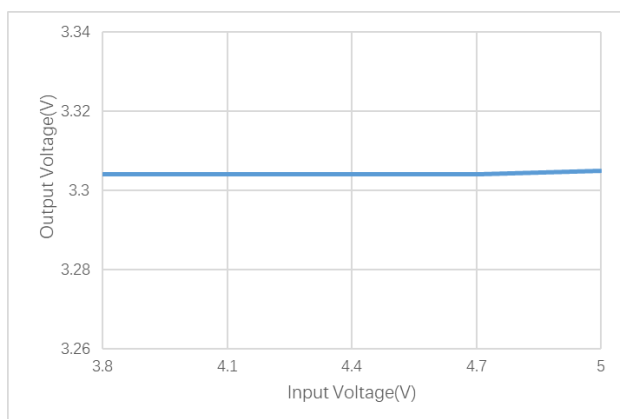


Output Voltage VS Input Voltage

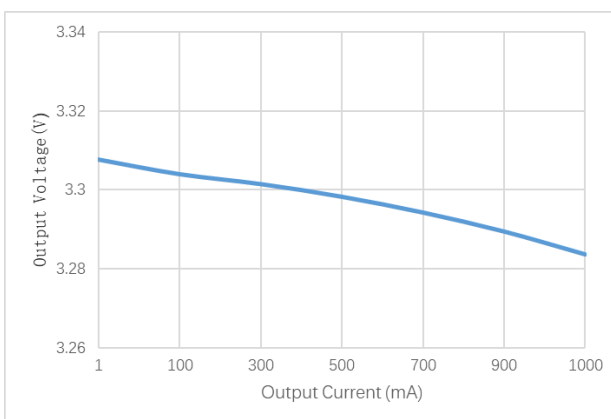

Output Voltage VS Output Current


ET5A0XX

Typical Characteristics(Continued)

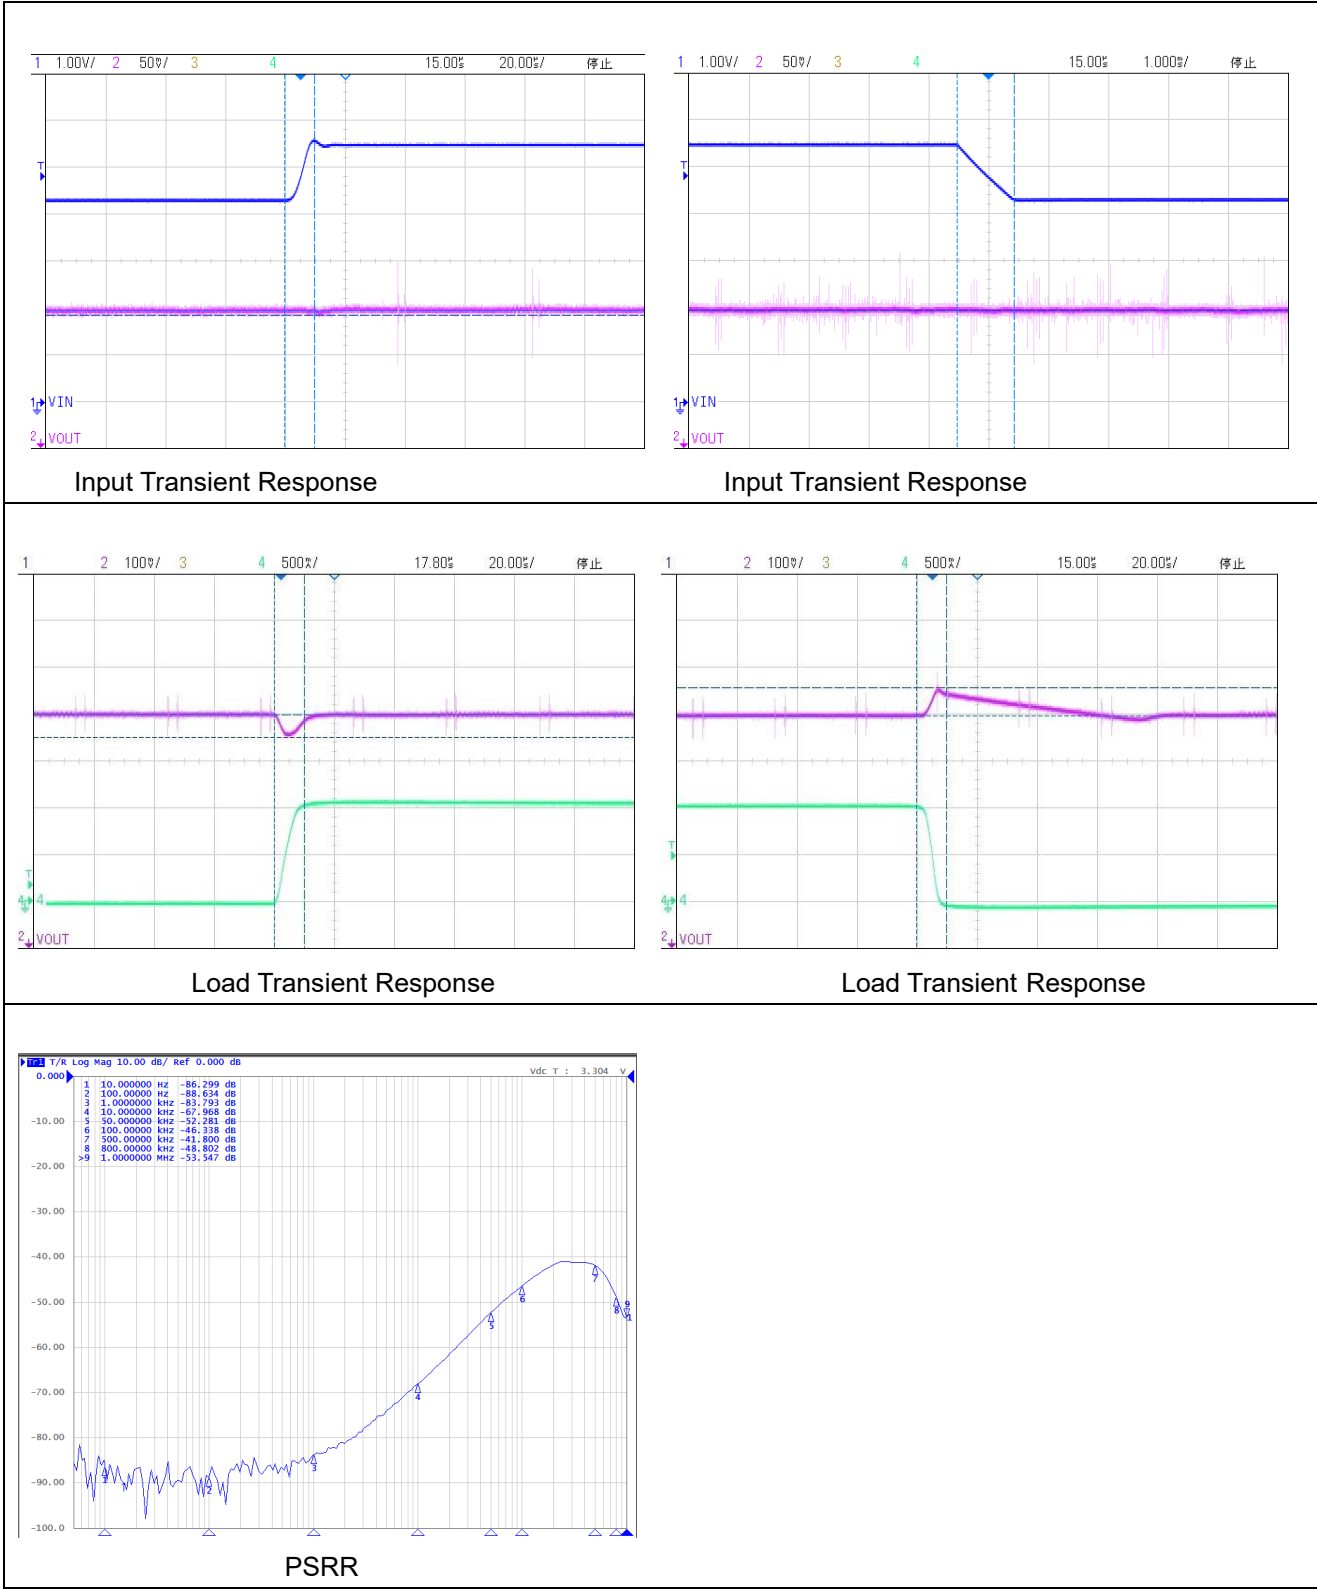


ET5A0XX

Application Circuits

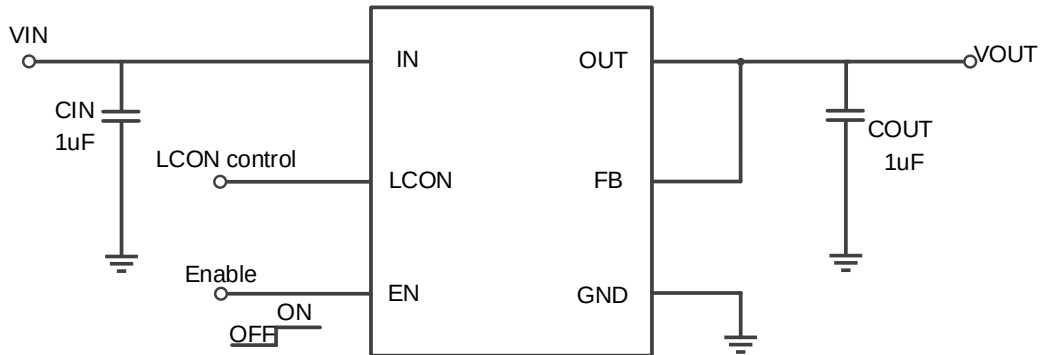

*: This application Fixed Output circuit only supplies for reference.

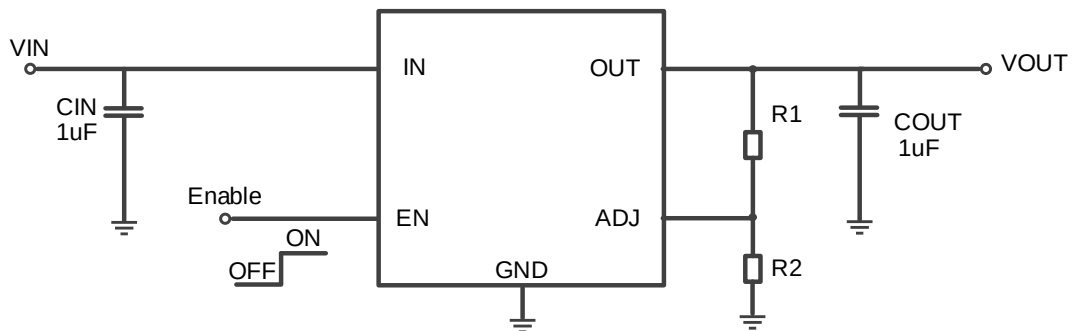


*: This application ADJ Output circuit only supplies for reference.


ET5A0XX

Package Dimension


DFN8(1.2x1.6) Package

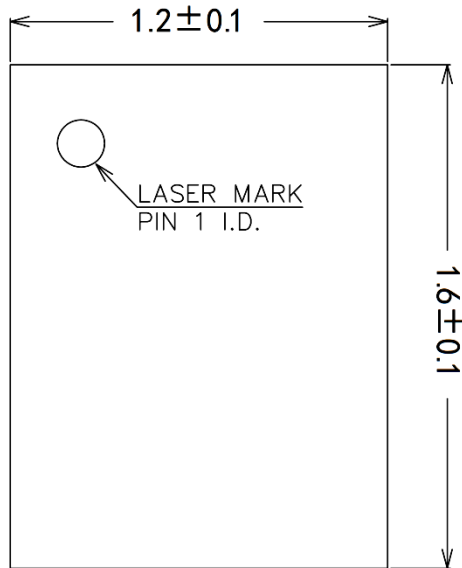

TOP VIEW

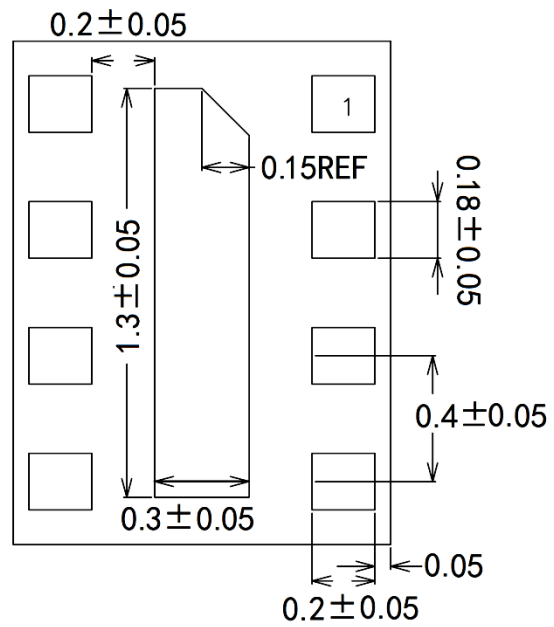


BOTTOM VIEW

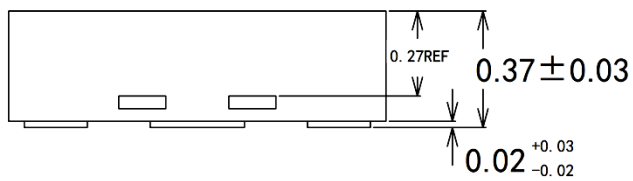

SIDE VIEW

ET5A0XX

DFN6(2x2) Package

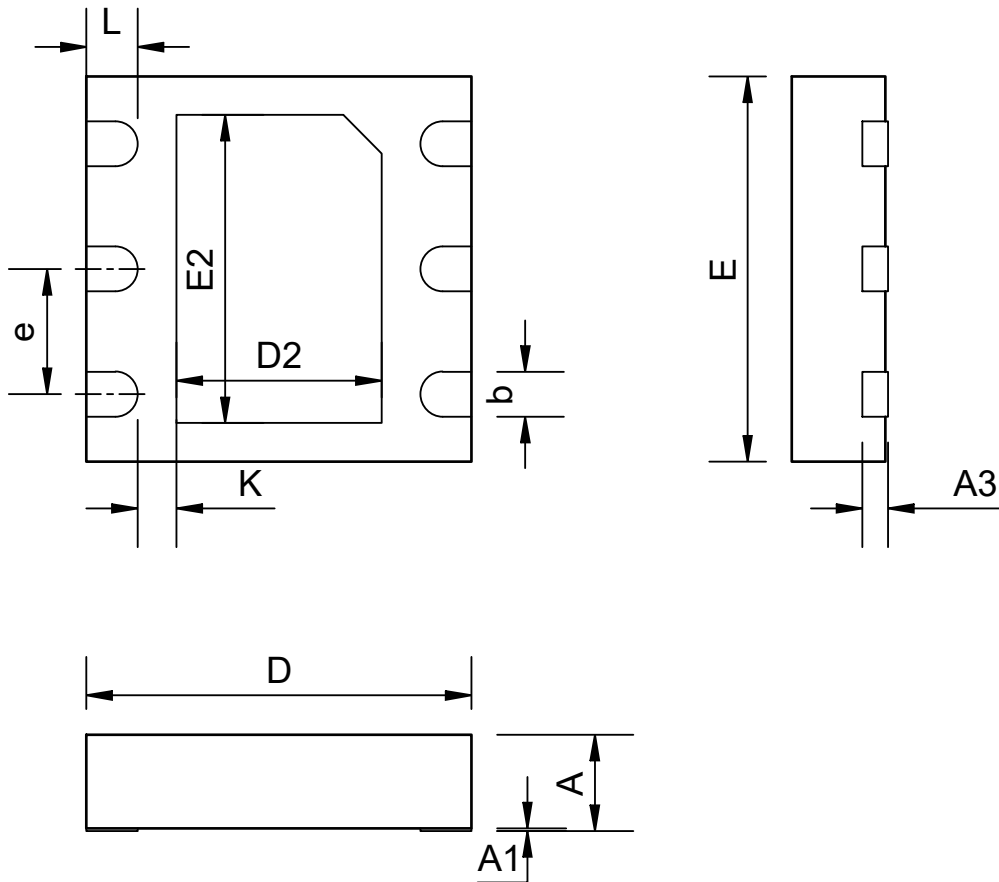


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.70	0.75	0.80
A1	0.00	0.02	0.05
A3	0.20REF		
b	0.25	0.35	0.45
D	1.90	2.00	2.10
E	1.90	2.00	2.10
D2	0.65	0.80	0.90
E2	1.35	1.50	1.60
e	0.65BSC		
L	0.30	0.35	0.40
k	0.20	--	--

ET5A0XX

SOT23-5 Package

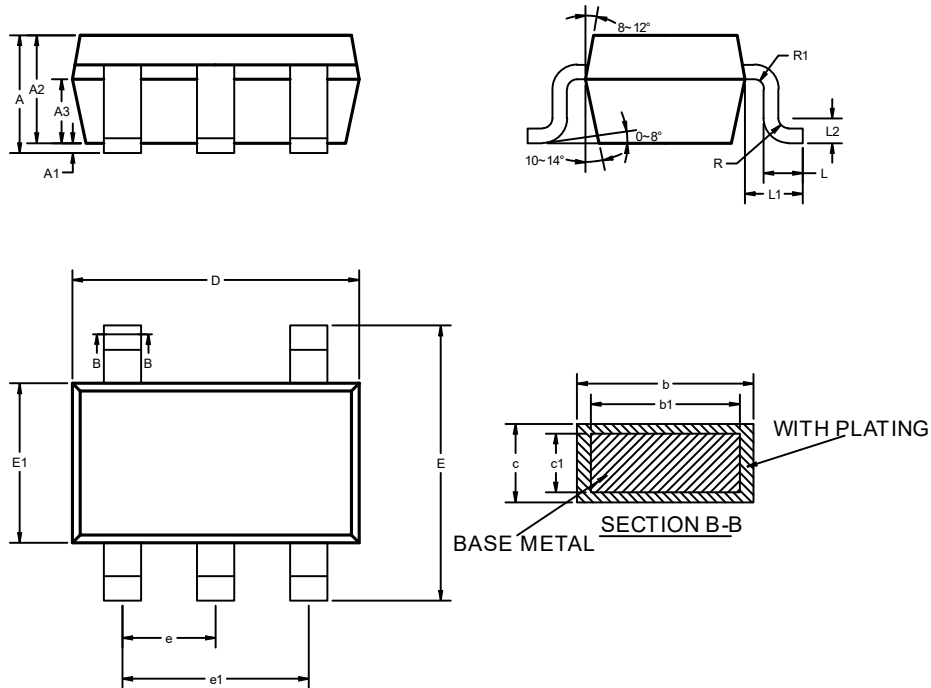


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	—	—	1.250
A1	0	—	0.150
A2	1.000	1.100	1.200
A3	0.600	0.650	0.700
b	0.360	—	0.450
b1	0.350	0.380	0.410
c	0.140	—	0.200
c1	0.140	0.150	0.160
D	2.826	2.926	3.026
E	2.600	2.800	3.000
E1	1.526	1.626	1.726
e	0.900	0.950	1.000
e1	1.800	1.900	2.000
L	0.300	0.400	0.500
L1	0.590REF		
L2	0.250BSC		
R	0.050	—	0.200
R1	0.050	—	0.200

ET5A0XX

SOT89-5 Package

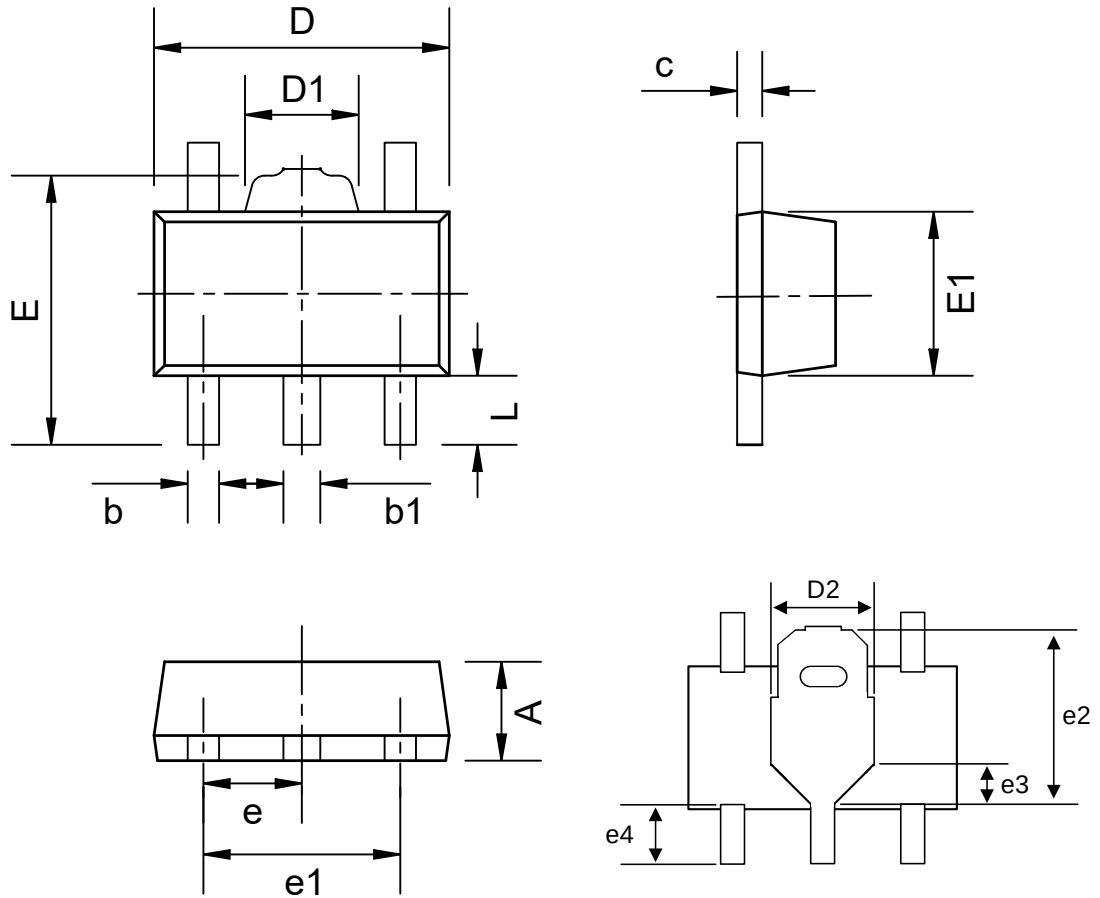


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.4	1.5	1.6
b	0.35	0.40	0.45
b1	0.43	0.48	0.53
c	0.37	0.42	0.47
D	4.4	4.5	4.6
D1	1.55REF		
D2	1.7	1.75	1.8
E	4	4.2	4.4
E1	2.4	2.5	2.6
e	1.5BSC		
e1	3.0BSC		
e2	3.09REF		
e3	0.64REF*45°		
e4	0.85	-	1.35
L	0.8	1	1.2

ET5A0XX

SOT223 Package

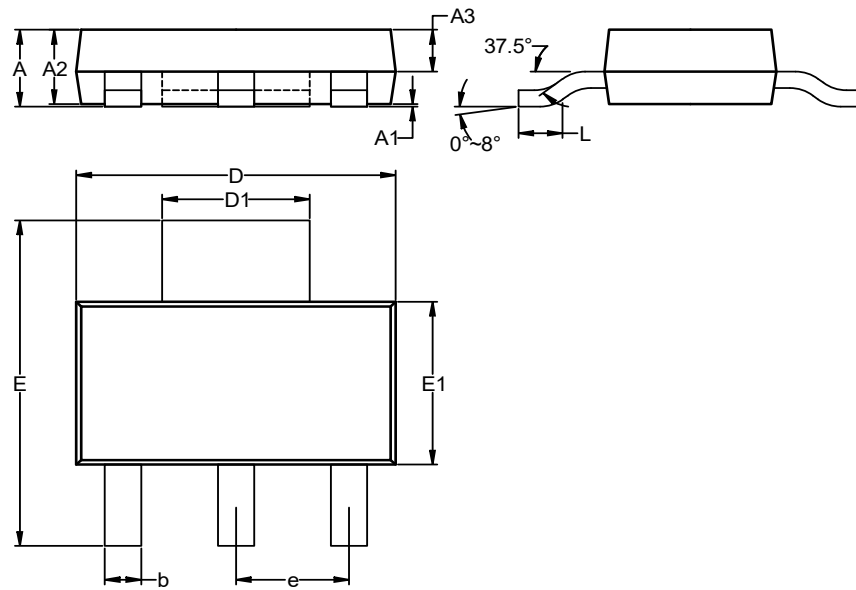


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.5	1.65	1.8
A1	0.03	0.06	0.09
A2	1.45	1.60	1.75
A3	0.8	0.9	1
b	0.69	-	0.78
D	6.3	6.5	6.7
D1	3.00REF		
e	2.30BSC		
E	6.8	7	7.2
E1	3.4	3.5	3.6
L	0.9	-	-

ET5A0XX

HSOP8 Package

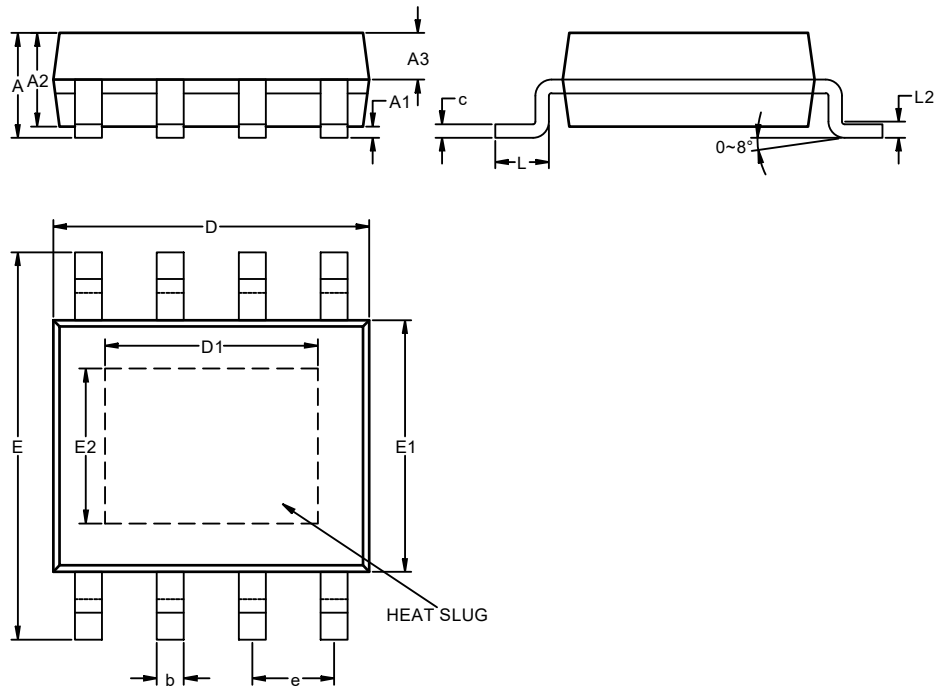

COMMON DIMENSIONS (UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	1.35	1.55	1.75
A1	0	0.1	0.15
A2	1.25	1.4	1.65
A3	0.5	0.6	0.7
b	0.38	-	0.51
c	0.17	-	0.25
D	4.8	4.9	5
D1	3.1	3.3	3.5
e	1.27BSC		
E	5.8	6	6.2
E1	3.8	3.9	4
E2	2.2	2.4	2.6
L	0.45	0.6	0.8
L2	0.25BSC		

ET5A0XX

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2017-07-28	Original Version	Liu Yi Guo	Liu Yi Guo	Zhu Jun Li
1.1	2018-06-20	Chang the Input Voltage to 5.5V	Liu Yi Guo	Liu Yi Guo	Liujiy
1.2	2020-03-11	Documents Check and Formalize	Shib	Shib	Liujiy
1.3	2020-03-18	Add Marking	Shib	Shib	Zhuji
1.4	2021-2-3	Add Typical Characteristic Graph	Shib	Shib	Liujiy
1.5	2021-9-24	Add Tape Information	Shib	Shib	Liujiy
1.6	2021-9-30	Correct Typo	Liuyg	Liuyg	Liujiy
1.7	2023-3-29	Update Form	Shibo	Liuyg	Liujiy
1.8	2025-3-11	Update Package Information	Yangxiaoxu	Liuyg	Liujiy