

# Low Voltage Operation Omnipolar Detection Type Hall Effect Switch IC

## General Description

The ET3713 is a high sensitivity and high-accuracy Omnipolar Hall effect switch IC that operates at a low voltage and low current consumption. ET3713 has two CMOS output terminal for N and S pole. The output voltage will be pulled low when this IC detects the magnetic flux density is larger than operate point( $B_{OPN}/B_{OPS}$ ) and the output voltage will recover to high until the magnetic flux density is smaller than the release point( $B_{RPN}/B_{RPS}$ ). Using this IC with a magnet makes it possible to detect the open / close status in various applications.

To achieve a high-density mounting the ET3713 uses a super-small DFN4 package.

The ET3713 is suitable for battery powered portable devices such as mobile phones and portable PCs etc. due to its low voltage operation and low current consumption, the average current consumption is only typ. 2.5  $\mu$ A with a 1.85 V supply.

## Features


- Pole detection: Omnipolar pole
- Output logic: Dule Active low output for N/S-pole
- Output form: CMOS output, no external pull-up resistor required
- Operating Point:  $B_{OP} = 2.5$  mT typ.
- Operating cycle:  $t_{CYCLE} = 50$  ms typ.
- Current consumption:  $I_{DD} = 2.5$   $\mu$ A typ. at 1.85 V
- Power supply voltage range:  $V_{DD} = 1.6$  V to 5.5 V
- Operation temperature range:  $T_a = -40^{\circ}\text{C}$  to  $+85^{\circ}\text{C}$
- Lead-free (Sn 100%), halogen-free
- Super small DFN4 package

## Application

- Open/Close detection for flip mobile phones
- Smart cover for smart phones
- Smart cover for portable PCs, tablet PCs
- Digital video cameras and portable game consoles
- Home appliances

# ET3713


## Pin Configuration

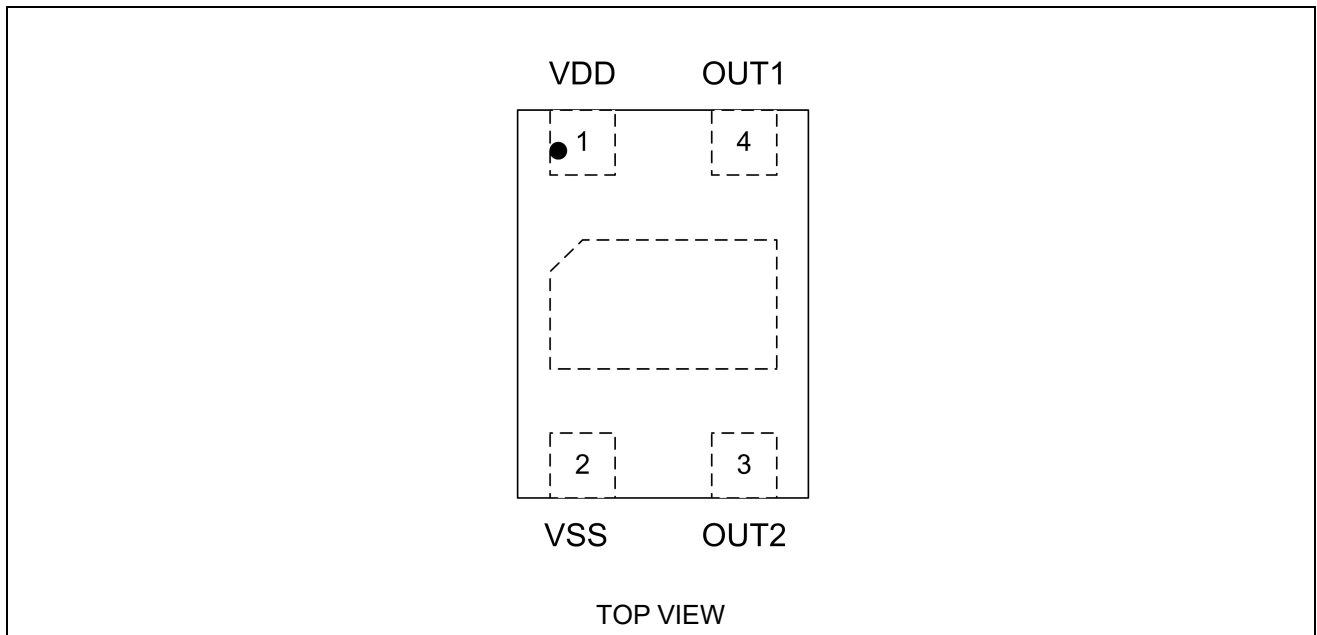

## Pin Function

Pin No.	Pin Name	Pin Function
1	VDD	Power supply pin
2	VSS	Ground Pin
3	OUT2	S Pole Detection Output pin
4	OUT1	N Pole Detection Output pin

## Block Diagram

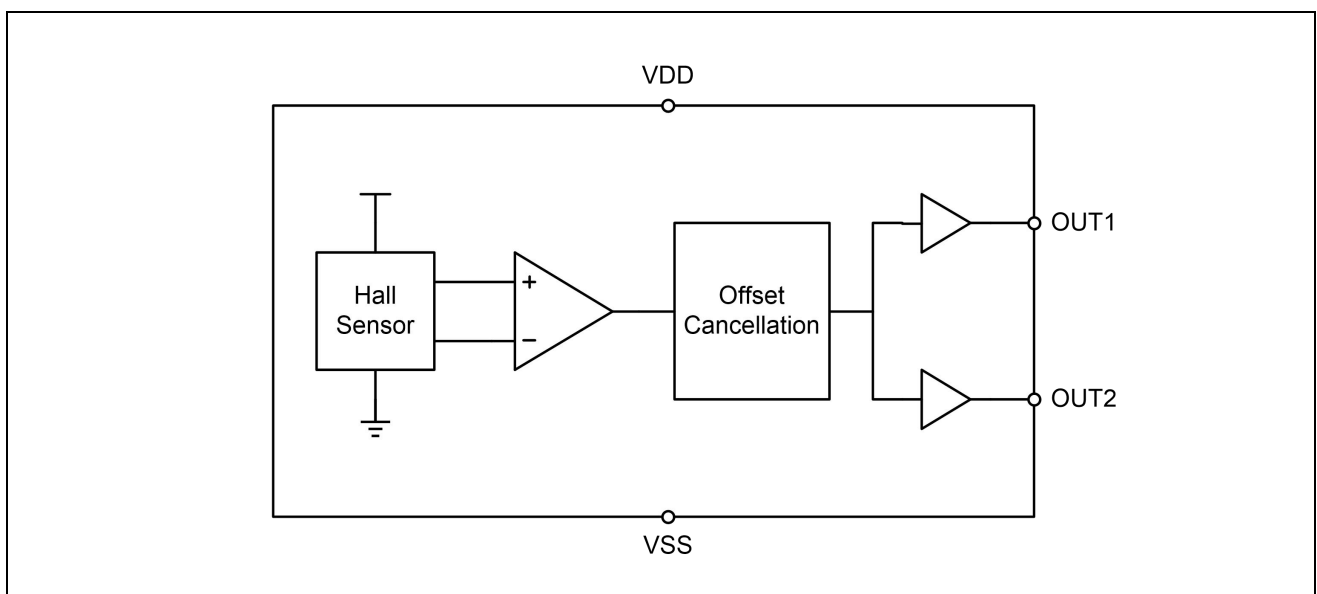

# ET3713

## Functional Description

### Applied magnetic flux

The magnetic flux applied to ET3713 should on the vertical direction on marking surface. If not, the horizontal component has no effect to detection. ET3713 is omnipolar type detector, the output voltage is inverted when the S or N type magnetic flux is applied to IC.

Below shows the direction in which magnetic flux should be applied.

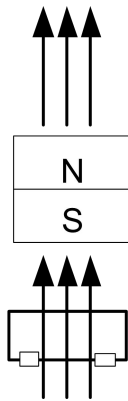


Figure1. Magnetic Flux Direction

### Hall sensor Position

The Hall sensor embedded in ET3713 is at the center of IC. As show below, the position of this Hall sensor is located in the area indicated by a circle, the diameter size of which is about 0.3 mm.

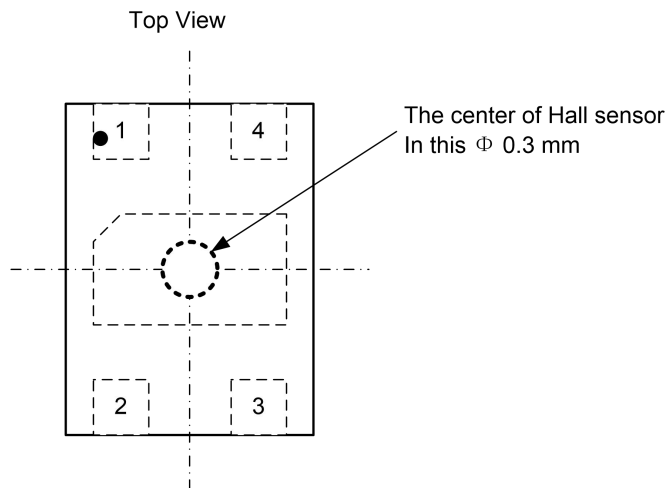


Figure 2. Hall Sensor Position

### Detecting Operation

ET3713 detects magnetic field periodically. When vertical component of the magnetic flux applied to IC exceeds the operating point ( $B_{OPN}$  or  $B_{OPS}$ ) such as the S or N pole of a magnet is moved closer to IC,  $V_{OUT}$  changes from "H" to "L". On the contrary, if magnetic flux is lower than the release point ( $B_{RPN}$  or  $B_{RPS}$ ),  $V_{OUT}$  changes from "L" to "H".

# ET3713

The relationship between the magnetic flux density and  $V_{OUT}$  is shown below.

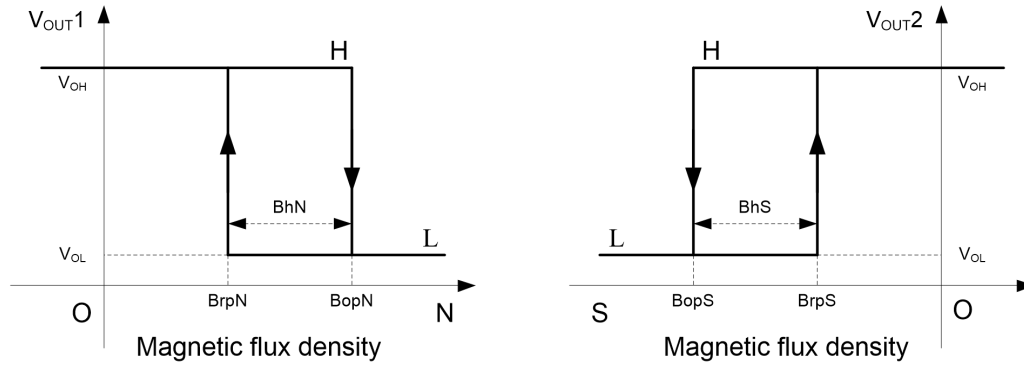


Figure 3. Magnetic Flux Density vs  $V_{OUT}$

## Operating Current

ET3713 performs the intermittent operation, therefore the average current consumption depends on the current in active mode, the active period ( $t_{AW}$ ), the current in sleep mode, and sleep period ( $t_{SL}$ ). The active current is about 1000  $\mu A$  typically, and 0.5  $\mu A$  at sleep mode. Please refer to electrical characteristic table for detail.

The time dependency of the current consumption is shown below.

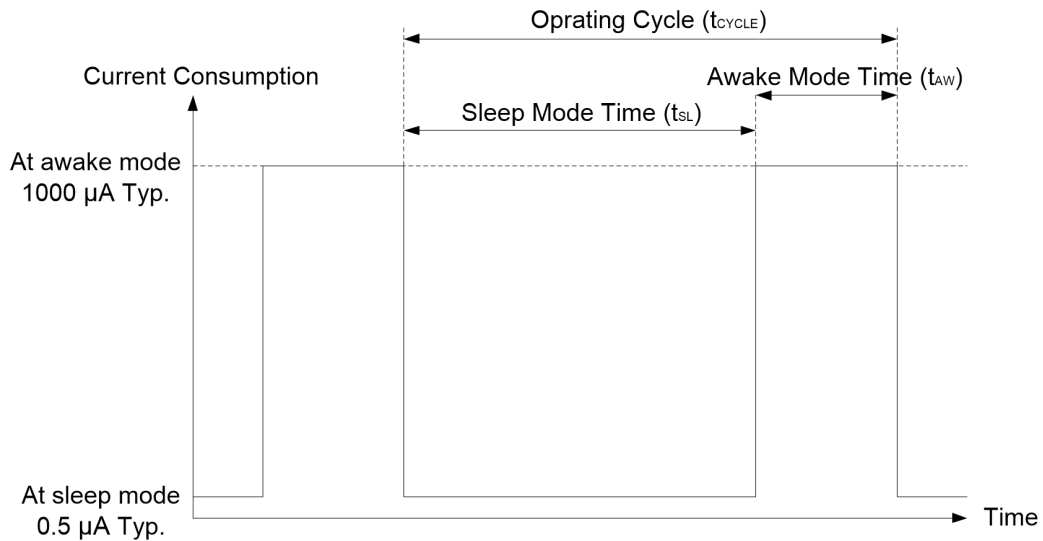


Figure 4. Operating Current

# ET3713

## Timing Diagram

The operation timing of this IC is shown below.

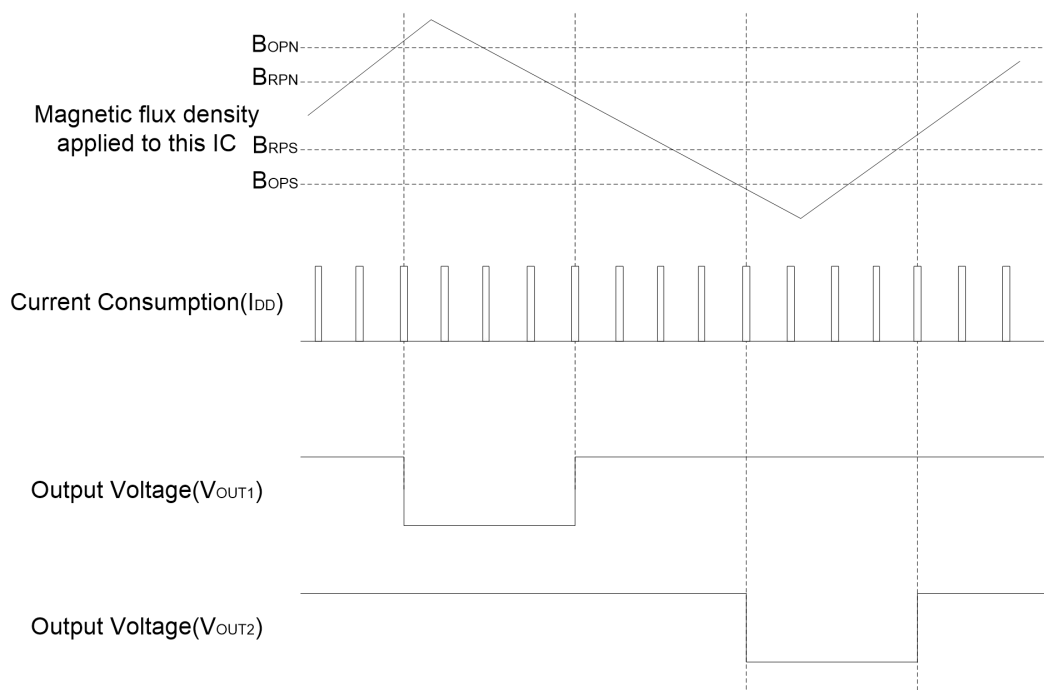


Figure 5. Timing Diagram

## Absolute Maximum Ratings

(T<sub>A</sub> = +25°C unless otherwise specified)

Symbol	Parameters	Rating	Unit
V <sub>DD</sub>	Power supply voltage	V <sub>SS</sub> -0.3 ~ V <sub>SS</sub> +7.0	V
I <sub>OUT</sub>	Output current	±1.0	mA
V <sub>OUT</sub>	Output voltage	V <sub>SS</sub> -0.3 ~ V <sub>DD</sub> +0.3	V
T <sub>A</sub>	Operation ambient temperature	-40 ~ +85	°C
T <sub>STG</sub>	Storage temperature	-40 ~ +125	°C
θ <sub>JA</sub>	Junction-to-ambient thermal resistance	300	°C/W

**Caution:** The absolute maximum ratings are rated values exceeding which the product could suffer physical damage. These values must therefore not be exceeded under any conditions.

## Electrical Characteristics

( $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 1.85\text{ V}$ , unless otherwise specified)

Symbol	Parameters	Conditions	Min	Typ	Max	Unit
$V_{DD}$	Power supply voltage	-	1.60	1.85	5.50	V
$I_{DD}$	Current consumption	Average Supply Current		2.5	4.0	$\mu\text{A}$
$V_{OL}$	Output voltage	CMOS output OUT1, OUT2	Output transistor Nch, $I_{OUT} = 0.5\text{ mA}$		0.4	V
$V_{OH}$			Output transistor Pch, $I_{OUT} = -0.5\text{ mA}$		$V_{DD}-0.4$	V
$t_{AW}$	Awake mode time			0.10		ms
$t_{SL}$	Sleep mode time			50.0		ms
$t_{CYCLE}$	Operating cycle	$t_{AW} + t_{SL}$		50.0	100.0	ms

## Magnetic Characteristics

( $T_A = +25^\circ\text{C}$ ,  $V_{DD} = 1.85\text{ V}$ , unless otherwise specified)

Parameters	Symbol	Conditions	Min	Typ	Max	Unit
Operation point <sup>(1)</sup>	N pole	$B_{OPN}$	1.4	2.5	3.2	mT <sup>(4)</sup>
	S pole	$B_{OPS}$	-3.2	-2.5	-1.4	mT
Release point <sup>(2)</sup>	N pole	$B_{RPN}$	1.2	2.0	3.0	mT
	S pole	$B_{RPS}$	-3.0	-2.0	-1.2	mT
Hysteresis width <sup>(3)</sup>	N pole	$B_{HN} = B_{OPN} - B_{RPN}$	0.1	0.5		mT
	S pole	$B_{HS} =  B_{OPS} - B_{RPS} $	0.1	0.5		mT

### Notes:


**(1)** Operating points ( $B_{OPN}$ ,  $B_{OPS}$ ):  $B_{OPN}$  and  $B_{OPS}$  are the values of magnetic flux density triggers the output voltage ( $V_{OUT}$ ) to low by increasing the N pole or S pole magnetic flux density applied to this IC. Even when the magnetic flux density is larger than  $B_{OPN}$  or  $B_{OPS}$ ,  $V_{OUT}$  status is held.

**(2)** Release points ( $B_{RPN}$ ,  $B_{RPS}$ ):  $B_{RPN}$  and  $B_{RPS}$  are the values of magnetic flux density makes the output voltage ( $V_{OUT}$ ) recover to high by decreasing the N pole or S pole magnetic flux density applied to this IC. Even when the magnetic flux density is lower than  $B_{RPN}$  or  $B_{RPS}$ ,  $V_{OUT}$  status is held.

**(3)** Hysteresis widths ( $B_{HN}$ ,  $B_{HS}$ ):  $B_{HN}$  and  $B_{HS}$  are the difference between  $B_{OPN}$  and  $B_{RPN}$ , and  $B_{OPS}$  and  $B_{RPS}$ , respectively.

**(4)** The unit of magnetic density mT can be converted by using the formula  $1\text{ mT} = 10\text{ Gauss}$ .

## Application Circuit

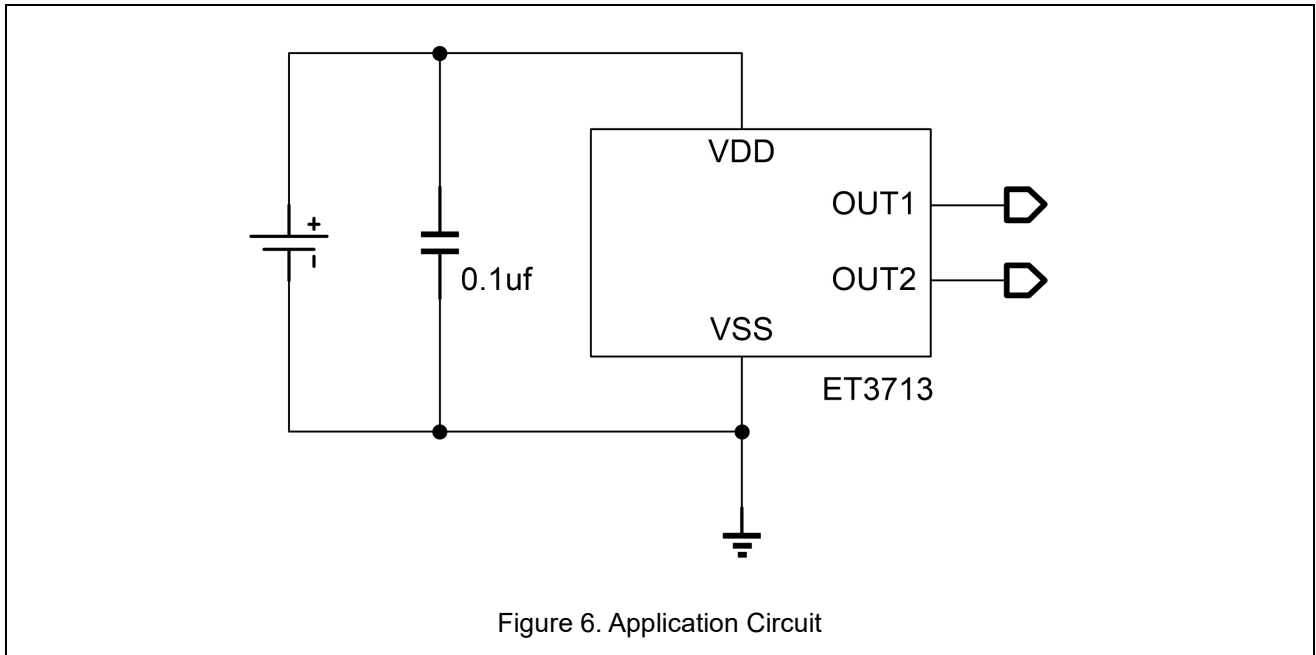


## Precautions

- The power supply for this IC should have low impedance, the IC may malfunction due to a supply voltage drop caused by feed through current.
- Power supply voltage rapidly changing may cause IC malfunction.
- Large stress on this IC may affect the magnetic characteristics. Avoid large stress applied to the IC on a board.

# ET3713

## Package Dimension

DFN4

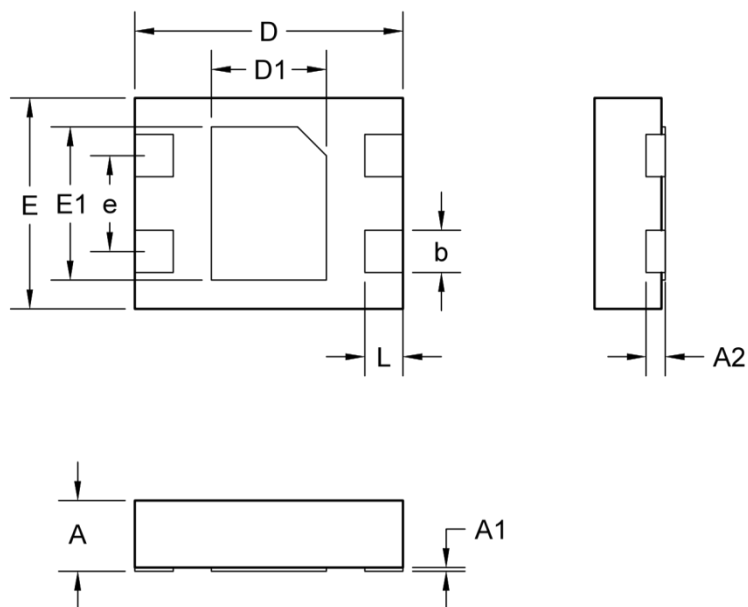

COMMON DIMENSIONS  
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.34	0.37	0.42
A1	0	0.02	0.05
A2	0.10Ref		
b	0.17	0.22	0.27
D	1.30	1.40	1.50
E	1.00	1.10	1.20
D1	0.50	0.60	0.70
E1	0.70	0.80	0.90
L	0.15	0.20	0.25
e	0.40	0.50	0.60

## Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2019.11.20	Preliminary Version	Wanggp	Wanggp	Zhuji
1.0	2022.7.25	Data Sheet Update	Shibo	Wanggp	Zhuji