

Single Inverter

General Description

The ETQ74LVC1G04 is an inverter operating from a 1.65V to 5.5V supply. This device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive.


Features

- 24mA Sink and Source Output Capability
- Over-Voltage Tolerant Inputs and Outputs
- Designed for 1.65V to 5.5V VCC Operation
- These Devices are Pb-Free and are RoHS Compliant
- Multiple Package Options Automotive AEC-Q100 Grade 1 Qualified
 - Ambient temperature range of -40°C to +125°C
 - ESD HBM 4KV PASS
 - ESD CDM 1KV PASS
 - Latch Up Current to 100mA PASS

Device Information

Part No.	Package	MSL
ETQ74LVC1G04	SC70-5 (1.3mm×2.1mm)	3
ETQ74LVC1G04T	SOT23-5 (1.6mm×2.9mm)	3
ETQ74LVC1G04Y	DFN6 (1.0mm×1.5mm)	1
ETQ74LVC1G04N	DFN6 (1.0mm×1.0mm)	1

Pin Configuration

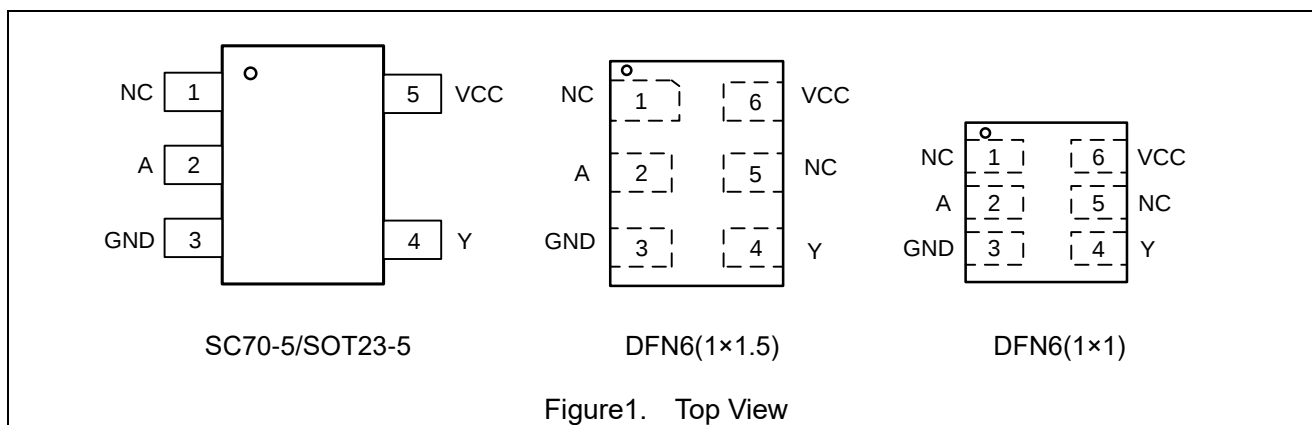

ETQ74LVC1G04

Pin Function


SC70-5/ SOT23-5

Pin No.	Pin Name	Function
1	NC	No connect
2	A	Input
3	GND	Ground
4	Y	Output
5	VCC	Supply Voltage

DFN6

Pin No.	Pin Name	Function
1	NC	No connect
2	A	Input
3	GND	Ground
4	Y	Output
5	NC	No connect
6	VCC	Supply Voltage

Block Diagram

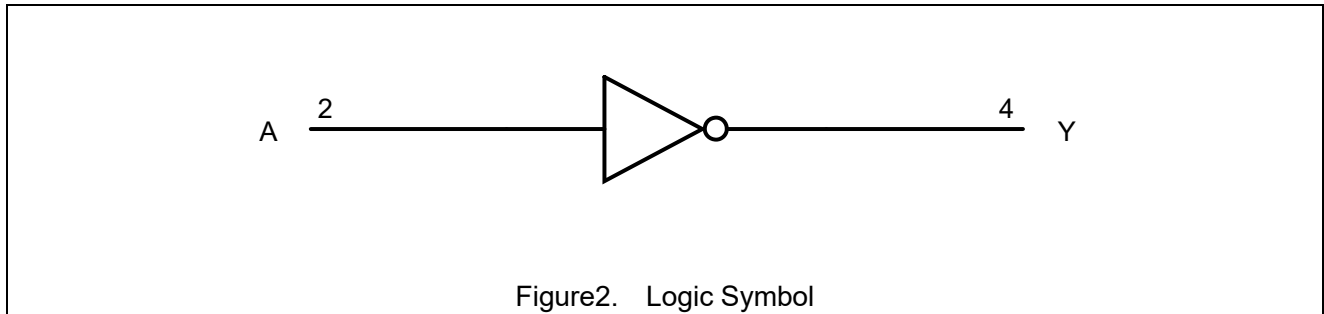

Function Table

Input A	Output Y
L	H
H	L

ETQ74LVC1G04

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V_{CC}	DC Supply Voltage		-0.5 to +7.0	V
V_I	DC Input Voltage ⁽¹⁾		$-0.5 \leq V_I \leq +7.0$	V
V_O	DC Output Voltage Output in Higher or Low State		-0.5 to $V_{CC} + 0.5$	V
I_{IK}	DC Input Diode Current	$V_I < GND$	-50	mA
I_{OK}	DC Output Diode Current	$V_O < GND, V_O > V_{CC}$	± 50	mA
I_O	DC Output Sink Current		± 50	mA
I_{CC}	DC Supply Current per Supply Pin		± 100	mA
I_{GND}	DC Ground Current per Supply Pin		± 100	mA
T_{STG}	Storage Temperature Range		-65 to 150	°C
T_L	Lead Temperature, Soldering 10 Seconds		260	°C
T_J	Max Junction Temperature		150	°C
V_{ESD}	ESD Classification	Human Body Model ⁽²⁾	± 4000	V
		Charged Device Model ⁽³⁾	± 1000	
I_{LU}	Max Latch up Current Above V_{CC} and GND at 125°C ⁽⁴⁾		± 100	mA

Stresses exceeding those listed in this table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: IO absolute maximum rating must be observed.

Note2: HBM tested per AEC-Q100-002(EIA/JESD22-A114).

Note3: CDM tested per AEC-Q100-011(EIA/JESD22-C101).

Note4: Latch up Current Maximum Rating tested per AEC-Q100-004(EIA/JESD78E).

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
$R_{\theta JA}$	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C /W
	SOT23-5		250	
	DFN6(1.0×1.5)		440	
	DFN6(1.0×1.0)		440	

Recommended Operating Conditions

Symbol	Parameter		Min	Max	Unit
V_{CC}	DC Supply Voltage		1.65	5.5	V
	Operating Date Retention		1.5	5.5	
V_{IN}	DC Input Voltage		0	5.5	V
V_{OUT}	DC Output Voltage (High or Low State)		0	5.5	V
T_A	Operating Temperature Range		-40	125	°C
t_r, t_f	Input Rise and Fall Time	$V_{CC} = 2.5\text{ V} \pm 0.2\text{ V}$	0	20	ns/V
		$V_{CC} = 3.0\text{ V} \pm 0.3\text{ V}$	0	10	
		$V_{CC} = 5.0\text{ V} \pm 0.5\text{ V}$	0	5	

ETQ74LVC1G04

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25 °C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		1.65 to 1.95 2.3 to 5.5	0.75V _{CC} 0.7V _{CC}			0.75V _{CC} 0.7V _{CC}		V
V _{IL}	Low-Level Input Voltage		1.65 to 1.95 2.3 to 5.5			0.25V _{CC} 0.3V _C		0.25V _{CC} 0.3V _{CC}	V
V _{OH}	High-Level Output Voltage	I _{OH} = -100μA	1.65 to 5.5	V _{CC} -0.1	V _{CC}		V _{CC} -0.1		V
		I _{OH} = -3mA	1.65	1.29	1.4		1.29		
		I _{OH} = -8mA	2.3	1.9	2.1		1.9		
		I _{OH} = -12mA	2.7	2.2	2.4		2.2		
		I _{OH} = -16mA	3.0	2.4	2.7		2.4		
		I _{OH} = -24mA	3.0	2.3	2.5		2.3		
		I _{OH} = -32mA	4.5	3.8	4.0		3.8		
V _{OL}	Low-Level Output Voltage	I _{OH} = 100μA	1.65 to 5.5		0.0	0.1		0.1	V
		I _{OL} = 3mA	1.65		0.08	0.24		0.24	
		I _{OL} = 8mA	2.3		0.20	0.3		0.3	
		I _{OL} = 12mA	2.7		0.22	0.4		0.4	
		I _{OL} = 16mA	3.0		0.28	0.4		0.4	
		I _{OL} = 24mA	3.0		0.38	0.55		0.55	
		I _{OL} = 32mA	4.5		0.42	0.55		0.55	
I _{IN}	Input Leakage Current	V _{IN} = 5.5V or GND	0 to 5.5		±0.1			±1.0	μA

I _{OFF}	Power Off Leakage Current	V _{IN} = 5.5V or V _{OUT} = 5.5V	0			1		10	μA
I _{CC}	Quiescent Supply Current	V _{IN} = 5.5V or GND	5.5					10	μA

ETQ74LVC1G04

AC Electrical Characteristics

$t_r = t_f = 2.5\text{ns}$; $C_L = 50\text{pF}$; $R_L = 500\ \Omega$.

Symbol	Parameter	Condition	$V_{CC}(\text{V})$	$T_A = 25\ ^\circ\text{C}$			$-40\ ^\circ\text{C} \leq T_A \leq 125\ ^\circ\text{C}$		Unit
				Min	Typ	Max	Min	Max	
t_{PLH} t_{PHL}	Propagation Delay (Figure3 and4)	$R_L = 1\text{M}\Omega$, $C_L = 15\text{pF}$	1.65	2.0	5.3	11.4	2.0	12.0	ns
			1.8	2.0	4.4	9.5	2.0	10.0	
		$R_L = 1\text{M}\Omega$, $C_L = 15\text{pF}$	2.5 ± 0.2	0.8	3.0	6.5	0.8	7.0	
		$R_L = 1\text{M}\Omega$, $C_L = 15\text{pF}$	3.3 ± 0.3	0.5	2.4	4.5	0.5	4.7	
				1.5	2.5	5.5	1.5	5.2	
		$R_L = 500\Omega$, $C_L = 50\text{pF}$	5.0 ± 0.5	0.5	2.0	3.9	0.5	4.1	
		$R_L = 500\Omega$, $C_L = 50\text{pF}$		0.8	2.4	4.3	0.8	4.5	

Capacitive Characteristics

Symbol	Parameter	Condition	Typ	Unit
C_{IN}	Input Capacitance	$V_{CC} = 5.5\text{V}$, $V_I = 0\text{V}$ or V_{CC}	>2.5	pF
C_{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, $V_{CC} = 3.3\text{V}$, $V_I = 0\text{V}$ or V_{CC}	26	pF
		10MHz, $V_{CC} = 5.5\text{V}$, $V_I = 0\text{V}$ or V_{CC}	30	

Note5: C_{PD} is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation:
 $I_{CC(OPR)} = C_{PD} \times V_{CC} \times f_{in} + I_{CC} \times C_{PD}$ is used to determine the no-load dynamic power consumption;
 $P_D = C_{PD} \times V_{CC}^2 \times f_{in} + I_{CC} \times V_{CC} \times Fig.$

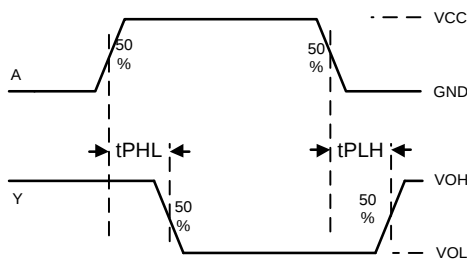


Figure 3. Switching Waveform


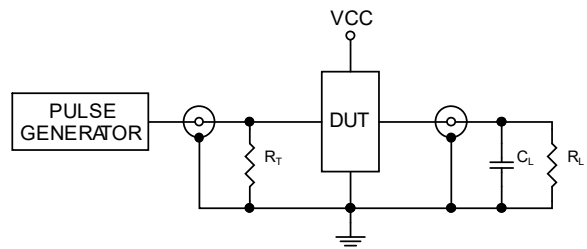


Figure4. Test Circuit

ETQ74LVC1G04

Package Dimension

SC70-5

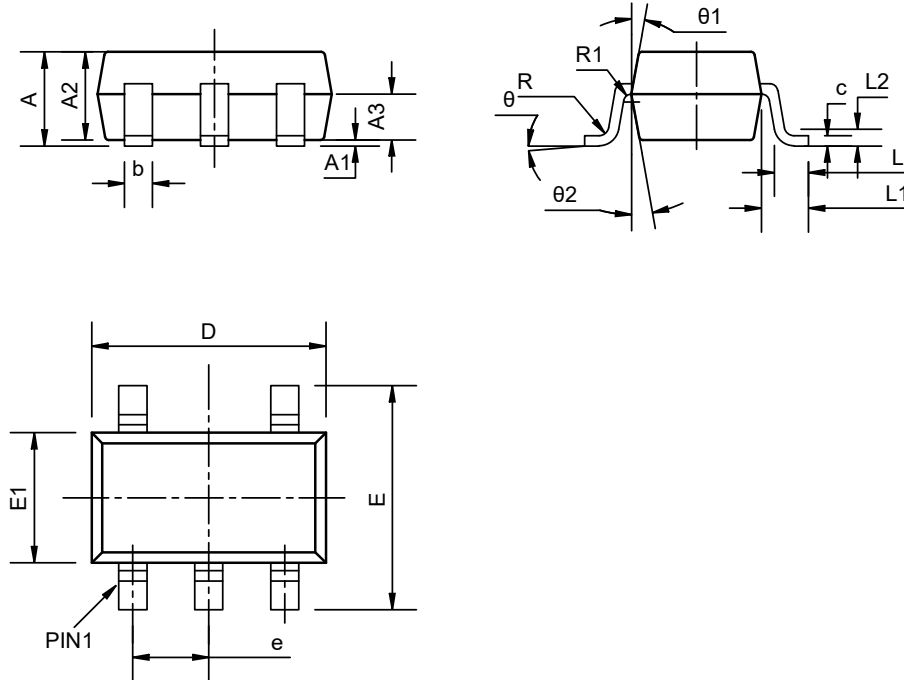


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.85	--	1.05
A1	0	--	0.10
A2	0.80	0.90	1.00
A3	0.47	0.52	0.57
b	0.23	--	0.33
c	0.12	--	0.18
D	2.02	2.07	2.12
E	2.20	2.30	2.40
E1	1.25	1.30	1.35
e	0.60	0.65	0.70
L	0.28	0.33	0.38
L1	0.50REF		
L2	0.15BSC		
R	0.10	--	--
R1	0.10	--	0.25
θ	0°	--	8°
$\theta 1$	6°	9°	12°
$\theta 2$	6°	9°	12°

ETQ74LVC1G04

SOT23-5

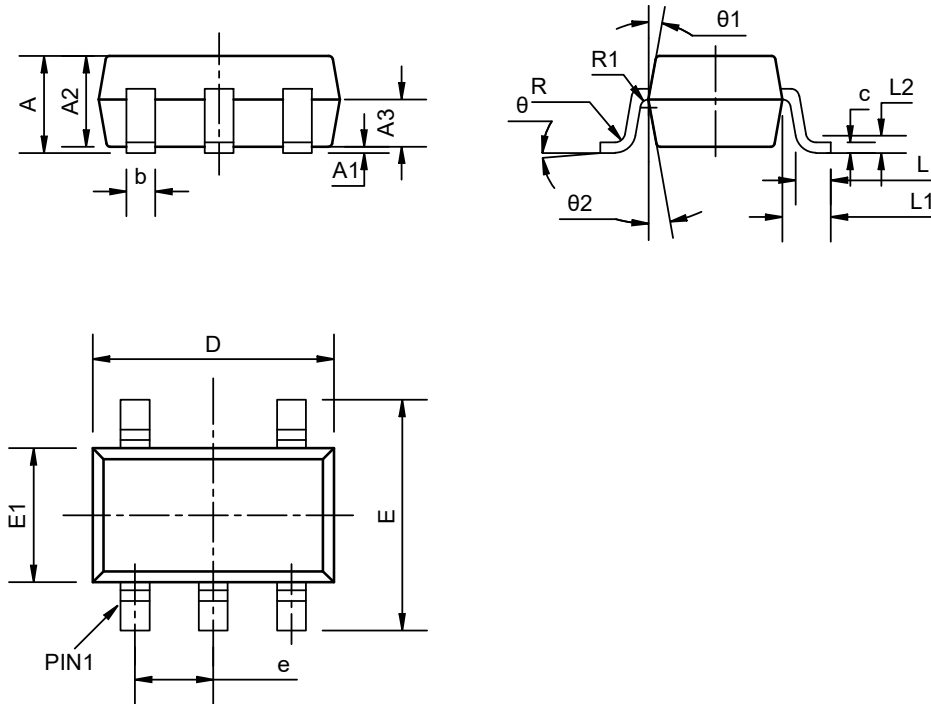


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	--	--	1.25
A1	0	--	0.15
A2	1.00	1.10	1.20
A3	0.60	0.65	0.70
b	0.36	--	0.50
c	0.14	--	0.20
D	2.826	2.926	3.026
E	2.60	2.80	3.00
E1	1.526	1.626	1.726
e	0.90	0.95	1.00
L	0.35	0.45	0.60
L1	0.59REF		
L2	0.25BSC		
R	0.10	--	--
R1	0.10	--	0.25
θ	0°	--	8°
θ1	3°	5°	7°
θ2	6°	--	14°

ETQ74LVC1G04

DFN6(1.0×1.5)

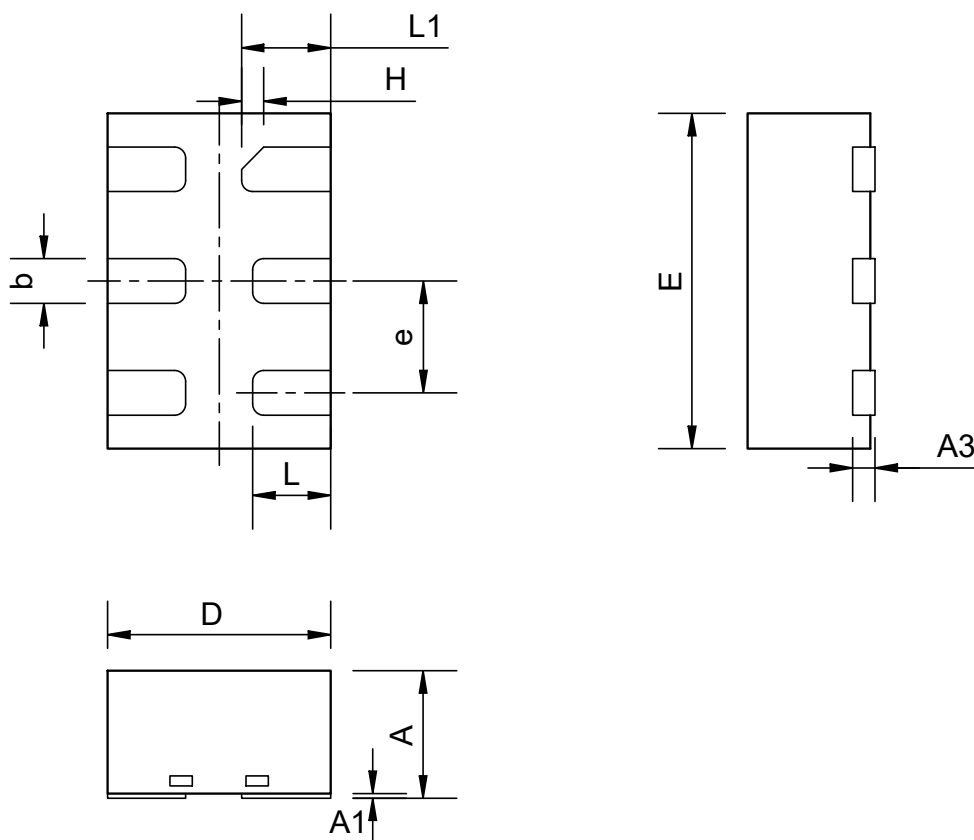


COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.40	0.50	0.60
H	0.10REF		
L	0.30	0.35	0.40
L1	0.35	0.40	0.45

ETQ74LVC1G04

DFN6(1×1)

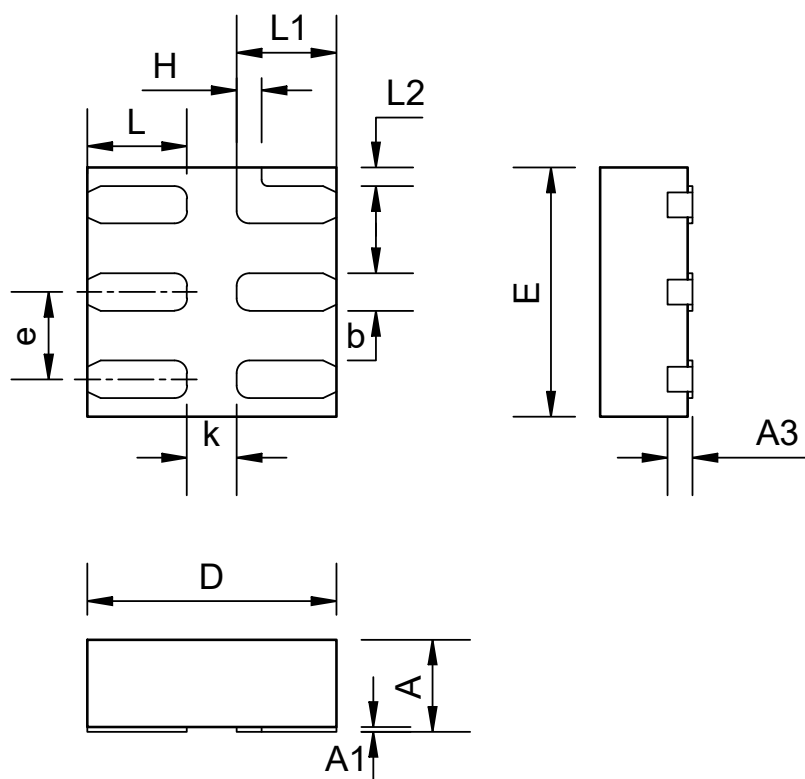

COMMON DIMENSIONS
(UNITS OF MEASURE=MILLIMETER)

SYMBOL	MIN	NOM	MAX
A	0.34	0.37	0.40
A1	0	0.02	0.05
A3	0.10REF		
b	0.10	0.15	0.20
D	0.95	1.00	1.05
E	0.95	1.00	1.05
e	0.30	0.35	0.40
H	0.10REF		
K	0.15	--	--
L	0.35	0.40	0.45
L1	0.35	0.40	0.45
L2	0.075REF		

ETQ74LVC1G04

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2017-07-19	Original Version	Ma Yong jian	Ma Yong jian	Ma Yong jian
1.1	2021-06-25	Update DC/AC Table	Ma Yong jian	Ma Yong jian	Ma Yong jian
1.2	2022-05-18	Add DFN6(1X1)	Shibo	Shibo	Shibo
1.3	2022-06-10	ESD Update	Shibo	Shibo	Shibo
1.4	2022-08-03	Update DFN6(1X1)	Shibo	Shibo	Shibo
1.5	2022-10-14	Update format and Thermal Characteristics	Wuhan	Shibo	Shibo
1.6	2023-11-30	Update Pin table/ESD	Shibo	Shibo	Shibo