

## Single 2-input OR Gate

### General Description

The ETQ74LVC1G32 is a single 2-input OR Gate in three tiny footprint packages. The device performs much as LCX multi-gate products in speed and drive.


### Features

- Designed for 1.65V to 5.5V  $V_{CC}$  Operation
- 4.8ns  $t_{PD}$  at 5V (typ)
- Source/Sink 24mA at 3.0V
- Over-Voltage Tolerant Inputs
- These Devices are Pb-Free and are RoHS Compliant
- Multiple Package Options Automotive AEC-Q100 Grade 1 Qualified
  - Ambient temperature range of -40°C to +125°C
  - ESD HBM 4KV PASS
  - ESD CDM 1KV PASS
  - Latch Up Current to 100mA PASS

### Device Information

| Part No.      | Package               | MSL |
|---------------|-----------------------|-----|
| ETQ74LVC1G32  | SC70-5 (1.3mm×2.1mm)  | 3   |
| ETQ74LVC1G32T | SOT23-5 (1.6mm×2.9mm) | 3   |
| ETQ74LVC1G32Y | DFN6 (1.0mm×1.5mm)    | 1   |

### Pin Configuration

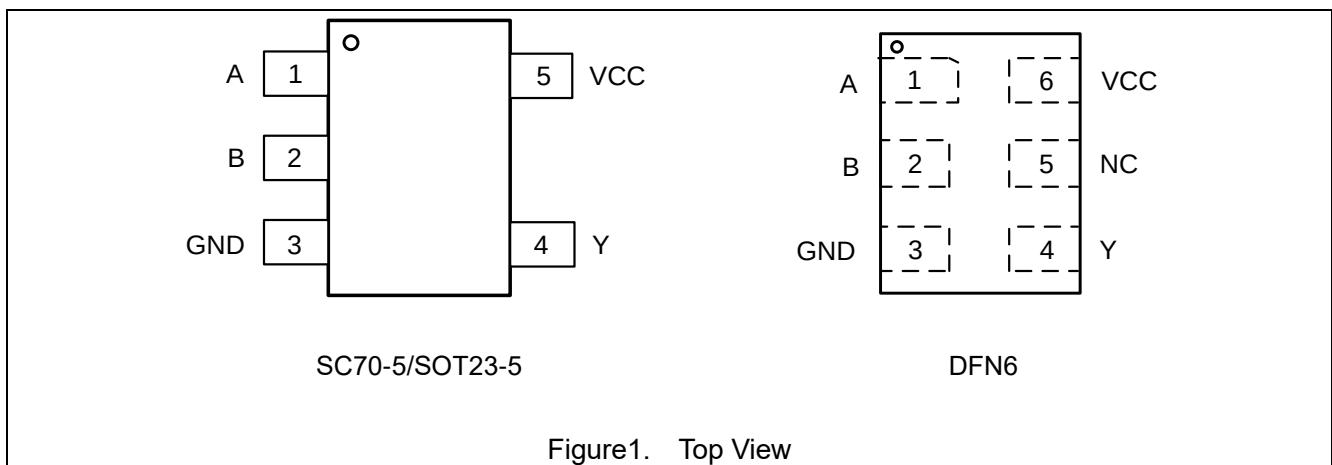

# ETQ74LVC1G32

## Pin Function

SC70-5/ SOT23-5

| Pin No. | Pin Name | Function       |
|---------|----------|----------------|
| 1       | A        | Input A        |
| 2       | B        | Input B        |
| 3       | GND      | Ground         |
| 4       | Y        | Output Y       |
| 5       | VCC      | Supply Voltage |

DFN6

| Pin No. | Pin Name | Function       |
|---------|----------|----------------|
| 1       | A        | Input A        |
| 2       | B        | Input B        |
| 3       | GND      | Ground         |
| 4       | Y        | Output Y       |
| 5       | NC       | No Connect     |
| 6       | VCC      | Supply Voltage |

## Block Diagram




Figure2. Logic Symbol

## Functional Description

Function Table

| Input |   | Output |
|-------|---|--------|
| A     | B | Y      |
| L     | L | L      |
| L     | H | H      |
| H     | L | H      |
| H     | H | H      |

# ETQ74LVC1G32

## Absolute Maximum Ratings

| Symbol           | Parameter                                                              |                                                        | Value                         | Unit |
|------------------|------------------------------------------------------------------------|--------------------------------------------------------|-------------------------------|------|
| V <sub>CC</sub>  | DC Supply Voltage                                                      |                                                        | -0.5 to +7.0                  | V    |
| V <sub>I</sub>   | DC Input Voltage <sup>(1)</sup>                                        |                                                        | -0.5 ≤ V <sub>I</sub> ≤ +7.0  | V    |
| V <sub>O</sub>   | DC Output Voltage Output in Higher or Low State                        |                                                        | -0.5 to V <sub>CC</sub> + 0.5 | V    |
| I <sub>IK</sub>  | DC Input Diode Current                                                 | V <sub>I</sub> < GND                                   | -50                           | mA   |
| I <sub>OK</sub>  | DC Output Diode Current                                                | V <sub>O</sub> < GND, V <sub>O</sub> > V <sub>CC</sub> | ±50                           | mA   |
| I <sub>O</sub>   | DC Output Sink Current                                                 |                                                        | ±50                           | mA   |
| I <sub>CC</sub>  | DC Supply Current per Supply Pin                                       |                                                        | ±100                          | mA   |
| I <sub>GND</sub> | DC Ground Current per Supply Pin                                       |                                                        | ±100                          | mA   |
| T <sub>STG</sub> | Storage Temperature Range                                              |                                                        | -65 to 150                    | °C   |
| T <sub>L</sub>   | Lead Temperature, Soldering 10 Seconds                                 |                                                        | 260                           | °C   |
| T <sub>J</sub>   | Max Junction Temperature                                               |                                                        | 150                           | °C   |
| V <sub>ESD</sub> | ESD Classification                                                     | Human Body Model <sup>(2)</sup>                        | ±4000                         | V    |
|                  |                                                                        | Charged Device Model <sup>(3)</sup>                    | ±1000                         |      |
| I <sub>LU</sub>  | Latch up Current Above V <sub>CC</sub> and GND at 125°C <sup>(4)</sup> |                                                        | ±100                          | mA   |

Stresses exceeding those listed in this table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

**Note1:** IO absolute maximum rating must be observed.

**Note2:** HBM tested per AEC-Q100-002(EIA/JESD22-A114).

**Note3:** CDM tested per AEC-Q100-011(EIA/JESD22-C101).

**Note4:** Latch up Current Maximum Rating tested per AEC-Q100-004(EIA/JESD78E).

## Thermal Characteristics

| Symbol           | Package | Ratings                                                        | Value | Unit |
|------------------|---------|----------------------------------------------------------------|-------|------|
| R <sub>θJA</sub> | SC70-5  | Thermal Characteristics, Thermal Resistance, Junction-to-Air   | 300   | °C/W |
|                  | SOT23-5 |                                                                | 250   |      |
|                  | DFN6    |                                                                | 440   |      |
| R <sub>θJB</sub> | SC70-5  | Thermal Characteristics, Thermal Resistance, Junction-to-board | 75    | °C/W |
|                  | SOT23-5 |                                                                | 65    |      |
|                  | DFN6    |                                                                | 270   |      |
|                  | SOT23-5 |                                                                | 260   |      |
|                  | DFN6    |                                                                | 150   |      |

# ETQ74LVC1G32

## Recommended Operating Conditions

| Symbol                          | Parameter                             |                                 | Min  | Max | Unit |
|---------------------------------|---------------------------------------|---------------------------------|------|-----|------|
| V <sub>CC</sub>                 | DC Supply Voltage Operating           |                                 | 1.65 | 5.5 | V    |
|                                 | Data Retention                        |                                 | 1.5  | 5.5 |      |
| V <sub>IN</sub>                 | DC Input Voltage                      |                                 | 0    | 5.5 | V    |
| V <sub>OUT</sub>                | DC Output Voltage (High or Low State) |                                 | 0    | 5.5 | V    |
| T <sub>A</sub>                  | Operating Temperature Range           |                                 | -40  | 125 | °C   |
| t <sub>r</sub> , t <sub>f</sub> | Input Rise and Fall Time              | V <sub>CC</sub> = 2.5 V ± 0.2 V | 0    | 20  | ns/V |
|                                 |                                       | V <sub>CC</sub> = 3.0 V ± 0.3 V | 0    | 10  |      |
|                                 |                                       | V <sub>CC</sub> = 5.0 V ± 0.5 V | 0    | 5   |      |

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

## Electrical Characteristics

### DC Electrical Characteristics

| Symbol          | Parameter                 | Condition                      | V <sub>CC</sub> (V)      | T <sub>A</sub> = 25 °C                    |                 |                                           | -40°C ≤ T <sub>A</sub> ≤ 125°C            |                                           | Unit |
|-----------------|---------------------------|--------------------------------|--------------------------|-------------------------------------------|-----------------|-------------------------------------------|-------------------------------------------|-------------------------------------------|------|
|                 |                           |                                |                          | Min                                       | Typ             | Max                                       | Min                                       | Max                                       |      |
| V <sub>IH</sub> | High-Level Input Voltage  |                                | 1.65to1.95<br>2.3 to 5.5 | 0.75V <sub>CC</sub><br>0.7V <sub>CC</sub> |                 |                                           | 0.75V <sub>CC</sub><br>0.7V <sub>CC</sub> |                                           | V    |
| V <sub>IL</sub> | Low-Level Input Voltage   |                                | 1.65to1.95<br>2.3 to 5.5 |                                           |                 | 0.25V <sub>CC</sub><br>0.3V <sub>CC</sub> |                                           | 0.25V <sub>CC</sub><br>0.3V <sub>CC</sub> | V    |
| V <sub>OH</sub> | High-Level Output Voltage | I <sub>OH</sub> =-100μA        | 1.65 to 5.5              | V <sub>CC</sub> -0.1                      | V <sub>CC</sub> |                                           | V <sub>CC</sub> -0.1                      |                                           | V    |
|                 |                           | I <sub>OH</sub> =-3mA          | 1.65                     | 1.29                                      | 1.52            |                                           | 1.29                                      |                                           |      |
|                 |                           | I <sub>OH</sub> =-8mA          | 2.3                      | 1.9                                       | 2.1             |                                           | 1.9                                       |                                           |      |
|                 |                           | I <sub>OH</sub> =-12mA         | 2.7                      | 2.2                                       | 2.4             |                                           | 2.2                                       |                                           |      |
|                 |                           | I <sub>OH</sub> =-16mA         | 3.0                      | 2.4                                       | 2.7             |                                           | 2.4                                       |                                           |      |
|                 |                           | I <sub>OH</sub> =-24mA         | 3.0                      | 2.3                                       | 2.5             |                                           | 2.3                                       |                                           |      |
|                 |                           | I <sub>OH</sub> =-32mA         | 4.5                      | 3.8                                       | 4.0             |                                           | 3.8                                       |                                           |      |
| V <sub>OL</sub> | Low-Level Output Voltage  | I <sub>OL</sub> =100μA         | 1.65 to 5.5              |                                           | 0.0             | 0.1                                       |                                           | 0.1                                       | V    |
|                 |                           | I <sub>OL</sub> =3mA           | 1.65                     |                                           | 0.08            | 0.24                                      |                                           | 0.24                                      |      |
|                 |                           | I <sub>OL</sub> =8mA           | 2.3                      |                                           | 0.20            | 0.3                                       |                                           | 0.3                                       |      |
|                 |                           | I <sub>OL</sub> =12mA          | 2.7                      |                                           | 0.22            | 0.4                                       |                                           | 0.4                                       |      |
|                 |                           | I <sub>OL</sub> =16mA          | 3.0                      |                                           | 0.28            | 0.4                                       |                                           | 0.4                                       |      |
|                 |                           | I <sub>OL</sub> =24mA          | 3.0                      |                                           | 0.38            | 0.55                                      |                                           | 0.55                                      |      |
|                 |                           | I <sub>OL</sub> =32mA          | 4.5                      |                                           | 0.42            | 0.55                                      |                                           | 0.55                                      |      |
| I <sub>IN</sub> | Input Leakage Current     | V <sub>IN</sub> = 5.5 V or GND | 0 to 5.5                 |                                           |                 | ± 0.1                                     |                                           | ±1.0                                      | μA   |

# ETQ74LVC1G32

## DC Electrical Characteristics (Continued)

| Symbol           | Parameter                 | Condition                                           | V <sub>CC</sub> (V) | T <sub>A</sub> = 25 °C |     |     | -40°C ≤ T <sub>A</sub> ≤ 125°C |     | Unit |
|------------------|---------------------------|-----------------------------------------------------|---------------------|------------------------|-----|-----|--------------------------------|-----|------|
|                  |                           |                                                     |                     | Min                    | Typ | Max | Min                            | Max |      |
| I <sub>OFF</sub> | Power Off Leakage Current | V <sub>IN</sub> = 5.5 V or V <sub>OUT</sub> = 5.5 V | 0                   |                        |     | 1.0 |                                | 10  | μA   |
| I <sub>CC</sub>  | Quiescent Supply Current  | V <sub>IN</sub> = 5.5 V or GND                      | 5.5                 |                        |     | 1.0 |                                | 10  | μA   |

## AC Electrical Characteristics

t<sub>r</sub> = t<sub>f</sub> = 3ns.

| Symbol          | Parameter                       | Condition                                   | V <sub>CC</sub> (V) | T <sub>A</sub> = 25 °C |      |      | -40°C ≤ T <sub>A</sub> ≤ 125°C |      | Unit |
|-----------------|---------------------------------|---------------------------------------------|---------------------|------------------------|------|------|--------------------------------|------|------|
|                 |                                 |                                             |                     | Min                    | Typ  | Max  | Min                            | Max  |      |
| t <sub>PD</sub> | Propagation Delay (Figure3and4) | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15pF  | 1.65                | 2.0                    | 10.1 | 12.9 | 2.0                            | 13.9 | ns   |
|                 |                                 |                                             | 1.8                 | 2.0                    | 9.1  | 11.6 | 2.0                            | 12.4 |      |
|                 |                                 | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15pF  | 2.5                 | 0.2                    | 6.0  | 7.7  | 0.8                            | 8.2  |      |
|                 |                                 | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15pF  | 3.3                 | 0.8                    | 5.0  | 6.5  | 0.5                            | 7.0  |      |
|                 |                                 |                                             |                     | 1.2                    | 5.6  | 7.1  | 1.5                            | 7.6  |      |
|                 |                                 | R <sub>L</sub> = 1MΩ C <sub>L</sub> = 15pF  | 5.0                 | 0.5                    | 4.4  | 5.6  | 0.5                            | 6.1  |      |
|                 |                                 | R <sub>L</sub> = 500Ω C <sub>L</sub> = 50pF |                     | 0.8                    | 4.8  | 6.1  | 0.8                            | 6.6  |      |

## Capacitance Characteristics

| Symbol          | Parameter                                    | Condition                                                             | Typ | Unit |
|-----------------|----------------------------------------------|-----------------------------------------------------------------------|-----|------|
| C <sub>IN</sub> | Input Capacitance                            | V <sub>CC</sub> = 5.5V, V <sub>I</sub> = 0V or V <sub>CC</sub>        | 2.5 | pF   |
| C <sub>PD</sub> | Power Dissipation Capacitance <sup>(5)</sup> | 10MHz, V <sub>CC</sub> = 3.3V, V <sub>I</sub> = 0V or V <sub>CC</sub> | 21  | pF   |
|                 |                                              | 10MHz, V <sub>CC</sub> = 5.5V, V <sub>I</sub> = 0V or V <sub>CC</sub> | 21  |      |

**Note5:** C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load. Average operating current can be obtained by the equation: I<sub>CC(OPR)</sub>=C<sub>PD</sub>×V<sub>CC</sub>×fin+I<sub>CC</sub>×C<sub>PD</sub> is used to determine the no-load dynamic power consumption; P<sub>D</sub>=C<sub>PD</sub>×V<sub>CC</sub><sup>2</sup> ×fin+I<sub>CC</sub>×V<sub>CC</sub>×Fig.

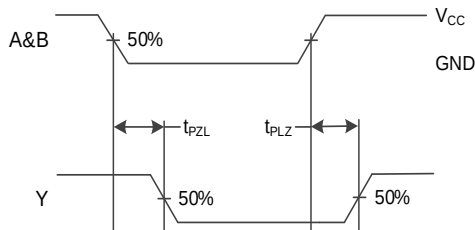


Figure3. Switching Waveform


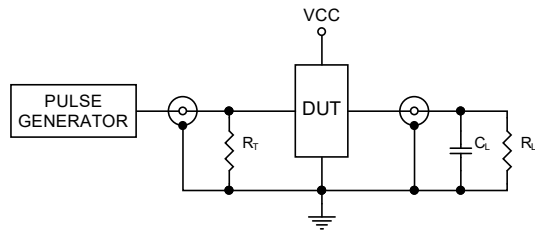


Figure4. Test Circuit

# ETQ74LVC1G32

## Package Dimension

SC70-5




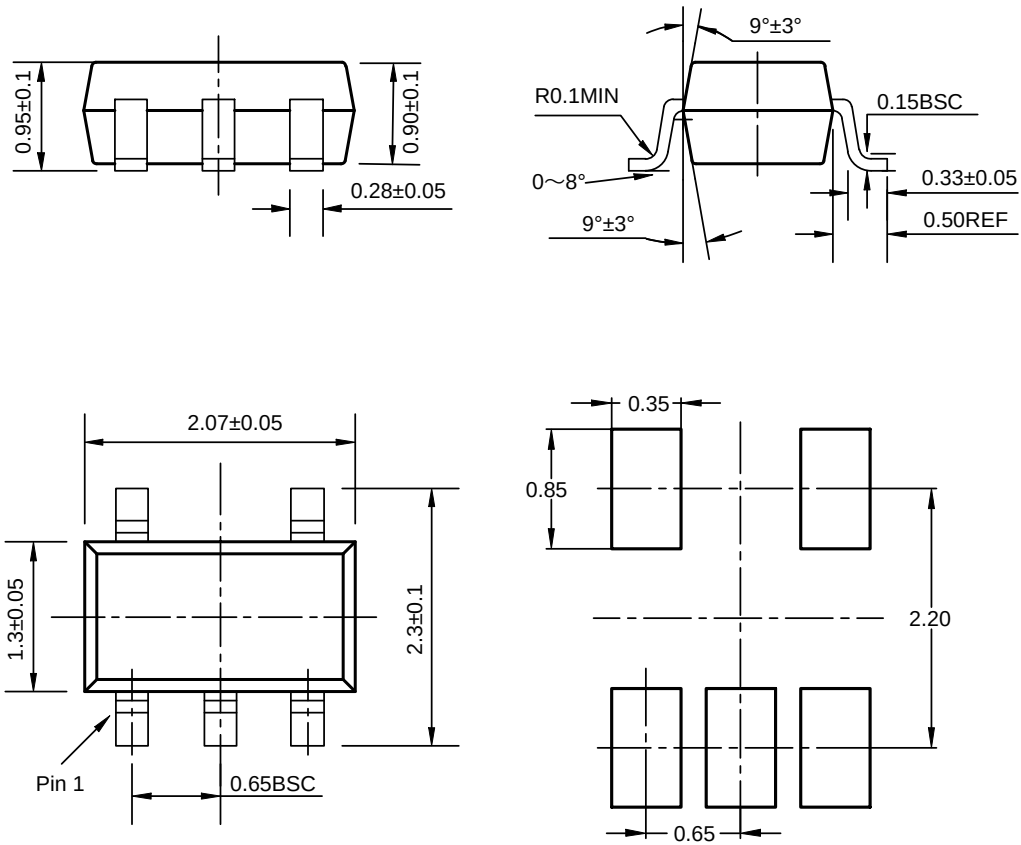


Recommended Land Pattern

Unit: mm

# ETQ74LVC1G32

SOT23-5

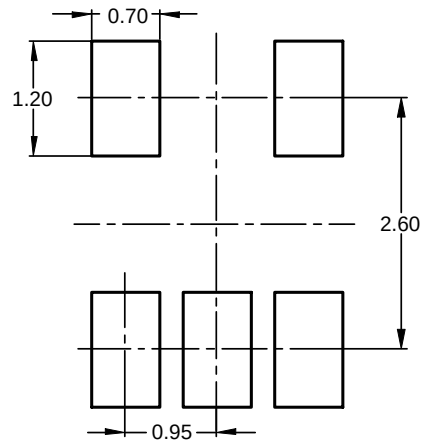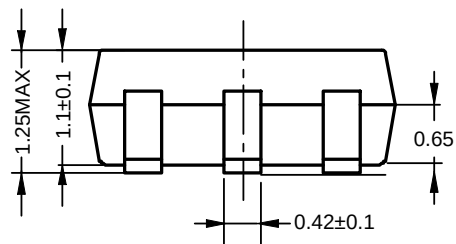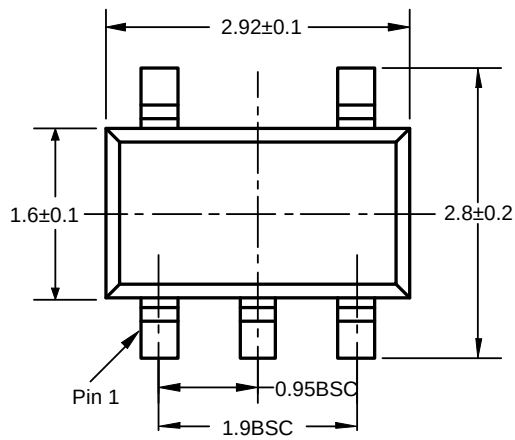


**Recommended Land Pattern**

Unit: mm

# ETQ74LVC1G32

DFN6 (1.0×1.5)

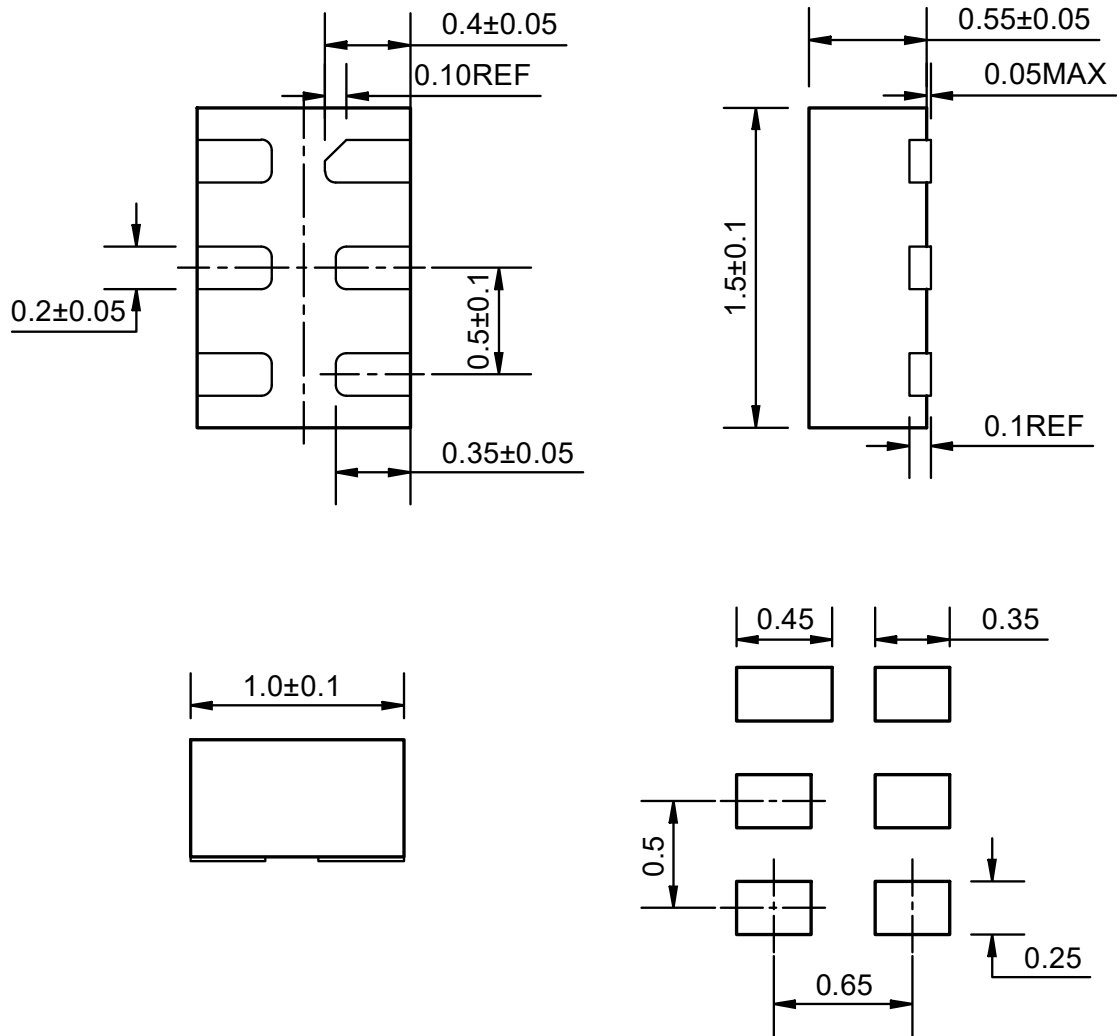

**Recommended Land Pattern**

Unit: mm



# ETQ74LVC1G32

---

## Revision History and Checking Table

| Version | Date       | Revision Item                                | Modifier     | Function & Spec Checking | Package & Tape Checking |
|---------|------------|----------------------------------------------|--------------|--------------------------|-------------------------|
| 1.0     | 2017-10-23 | Original Version                             | Ma Yong jian | Ma Yong jian             | Liu Jia Ying            |
| 1.1     | 2019-07-18 | Update AC Table and Device Information       | Ma Yong jian | Ma Yong jian             | Liu Jia Ying            |
| 1.2     | 2022-06-10 | ESD Update                                   | Shibo        | Shibo                    | Zhuji                   |
| 1.3     | 2022-07-7  | Add $\theta_{JB}, T_A = 125^{\circ}\text{C}$ | Shibo        | Shibo                    | Zhuji                   |
| 1.4     | 2022-11-11 | Update Typeset and Thermal Characteristics   | Wuhan        | Shibo                    | Zhuji                   |
| 1.5     | 2023-11-29 | Update Typeset /ESD                          | Shibo        | Shibo                    | Liuji                   |