

Dual Buffer with Open Drain Output

General Description

The ET74AHCT2G07 is a high-performance dual buffer with open drain outputs operating from a 4.5V to 6V supply. The internal circuit is composed of multiple stages, including an open drain output. The open drain output provides the capability to set the output switching level to a user selectable value with an external resistor and power supply.


The logic high output value is set by the external power supply and can be less than, equal or greater than the V_{CC} power supply, provided the voltage supply is less than 6V.

Features

- Designed for 4.5V to 5.5V V_{CC} Operation
- Over-voltage Tolerant Inputs Accept Voltages to 5.5V
- 8mA Output Sink Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and RoHS Compliant
- ESD Protection Complies with JESD22 Standard
 - HBM: $\pm 4000V$ Pass (JEDEC JS-001)
 - CDM: $\pm 1000V$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 100mA$ per JEDEC JESD78F
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74AHCT2G07	SC70-6 (1.3mm × 2.1mm)	Tape and Reel, 3K/Reel	1
ET74AHCT2G07T	SOT23-6 (1.6mm × 2.9mm)	Tape and Reel, 3K/Reel	3
ET74AHCT2G07Y	DFN6 (1.0mm × 1.5mm)	Tape and Reel, 3K/Reel	1

Pin Configuration

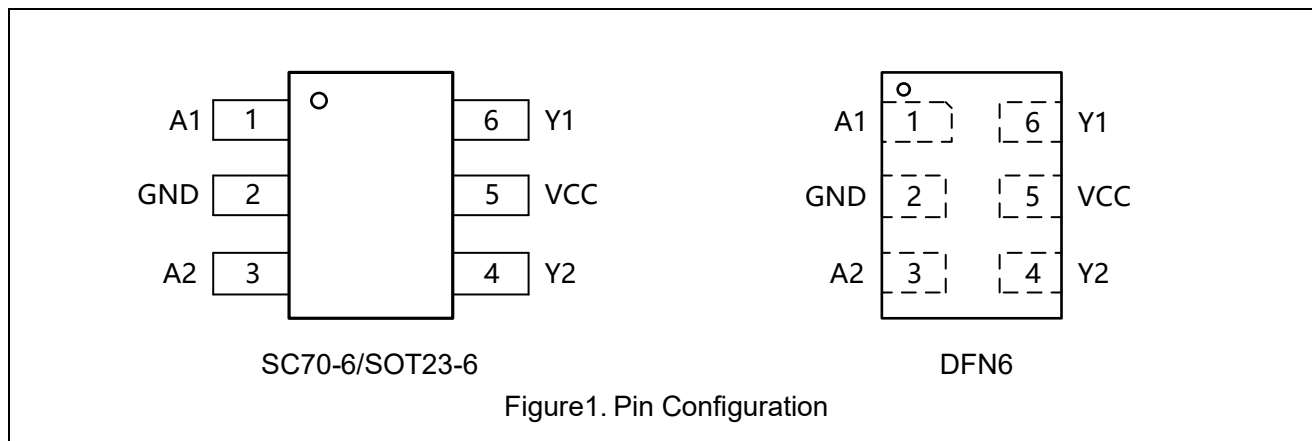

ET74AHCT2G07

Pin Function

SC70-6/ SOT23-6/ DFN6

Pin No.	Pin Name	Function
1	A1	Input CH1
2	GND	Ground
3	A2	Input CH2
4	Y2	Output CH2
5	VCC	Supply Voltage
6	Y1	Output CH1

Block Diagram

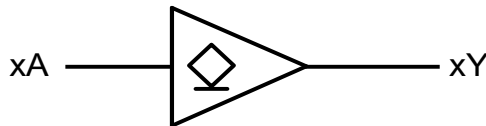


Figure2. Logic Symbol

Function Table

Input xA	Output xY
L	L
H	Z

ET74AHCT2G07

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage (VCC Pin)		-0.5 to 7.0	V
V _I	DC Input Voltage ⁽¹⁾		-0.5 ≤ V _I ≤ 7.0	V
V _O	DC Output Voltage Output in Higher or Low State		-0.5 to V _{CC} + 0.5	V
I _{IK}	DC Input Diode Current, V _I < GND		-50	mA
I _{OK}	DC Output Diode Current, V _O < GND, V _O > V _{CC}		±50	mA
I _O	DC Output Sink Current		±50	mA
I _{CC}	DC Supply Current Per Supply Pin		100	mA
I _{GND}	DC Ground Current Per Supply Pin		-100	mA
T _{STG}	Storage Temperature Range		-65 to 150	°C
T _L	Lead Temperature, Soldering 10 Seconds		260	°C
T _J	Max Junction Temperature		150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch Up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±100	mA

Stresses exceeding those listed in this table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_O absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch Up Current Maximum Rating tested per JEDEC JESD78F.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-6	Thermal Characteristics, Thermal Resistance, Junction-to-Air	280	°C/W
	SOT23-6		180	
	DFN6		440	
P _D	SC70-6	Power Dissipation in Still Air at 85°C	230	mW
	SOT23-6		360	
	DFN6		150	

ET74AHCT2G07

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage	4.5	5.5	V
V _I	DC Input Voltage	0	V _{CC}	V
V _O	DC Output Voltage (High or Low State)	0	V _{CC}	V
T _A	Operating Temperature Range	-40	125	°C

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		4.5	2			2		V
			5.5	2			2		
V _{IL}	Low-Level Input Voltage		4.5			0.8		0.8	V
			5.5			0.8		0.8	
V _{OL}	Low-Level Output Voltage	I _{OL} = 50uA	4.5			0.1		0.1	V
		I _{OL} = 8mA				0.36		0.44	
I _I	Input Leakage Current	V _I = 5.5V or GND	0~5.5			±0.1		±1.0	uA
I _{OFF}	Power Off Leakage Current	V _I = 5.5V or V _O = 5.5V	0			1		10	uA
I _{CC}	Quiescent Supply Current	V _I = 5.5V or GND	5.5			1		10	uA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ET74AHCT2G07

Electrical Characteristics (continued)

AC Electrical Characteristics

$t_r = t_f = 3\text{ns}$; $R_L = 500\Omega$

Over recommended operating free-air temperature range, $V_{CC} = 5V \pm 0.5V$ (unless otherwise noted)

Symbol	Parameter	Condition	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$		Unit
			Min	Typ	Max	Min	Max	
t_{PLH}	Propagation Delay	$C_L = 15\text{pF}$		3.8	6.8	1.0	8.8	ns
t_{PHL}		$C_L = 50\text{pF}$		5.3	8.8	1.0	10.8	ns

Capacitance Characteristics

Symbol	Parameter	Condition	Typ	Unit
C_{IN}	Input Capacitance	$V_{CC} = 5V$, $V_I = 0V$ or V_{CC}	2.5	pF
C_{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, $V_{CC} = 5V$, $V_I = 0V$ or V_{CC}	28	pF

Note5: C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.

AC Test Circuit

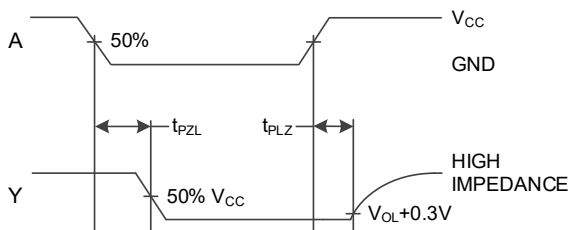


Figure3. Switching Waveform


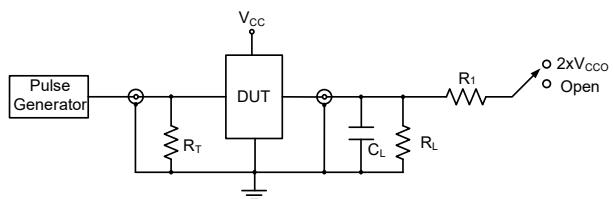


Figure4. Test Circuit

ET74AHCT2G07

Package Dimension

SC70-6 (1.3mm × 2.1mm)

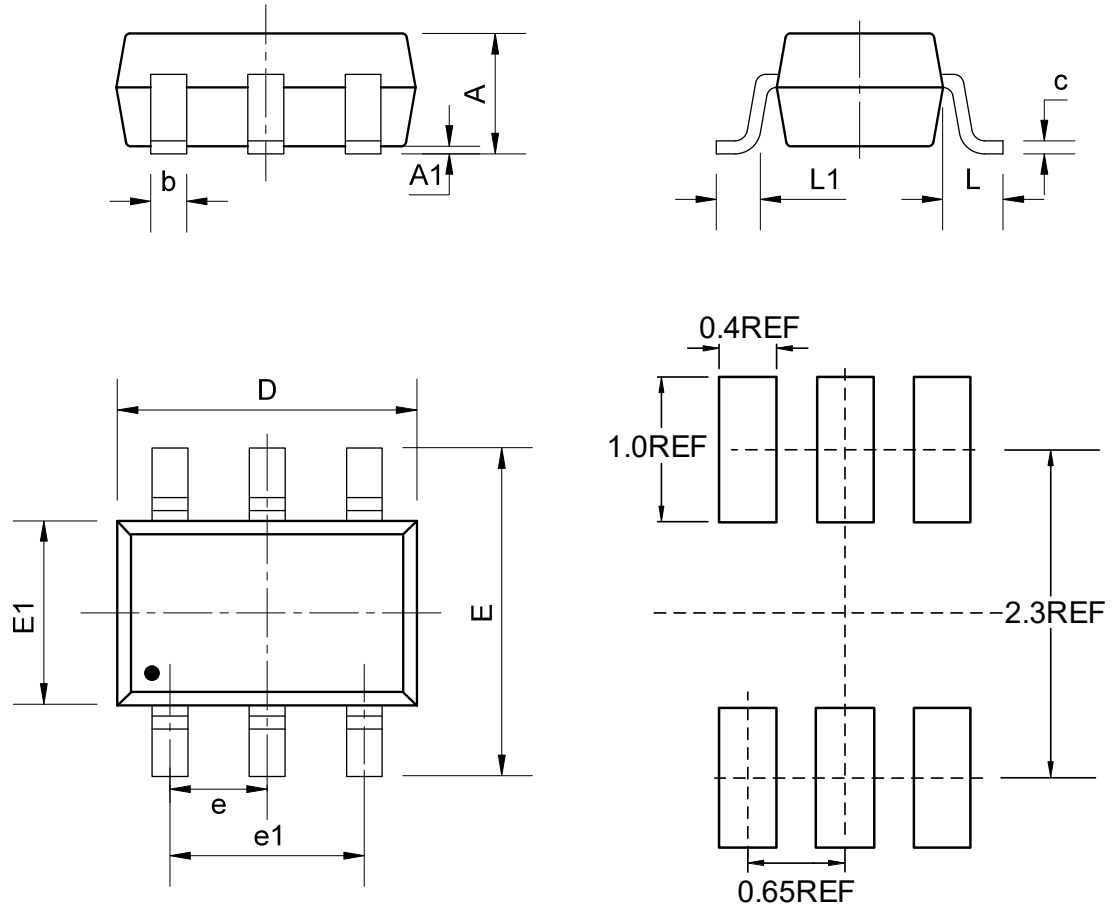


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.10
A1	0.00	-	0.15
b	0.15	-	0.35
c	0.08	-	0.20
D	2.00	2.10	2.30
e	0.65BSC		
e1	1.30BSC		
E	2.15	2.30	2.50
E1	1.15	1.30	1.45
L	0.50REF		
L1	0.33REF		

ET74AHCT2G07

SOT23-6 (1.6mm × 2.9mm)

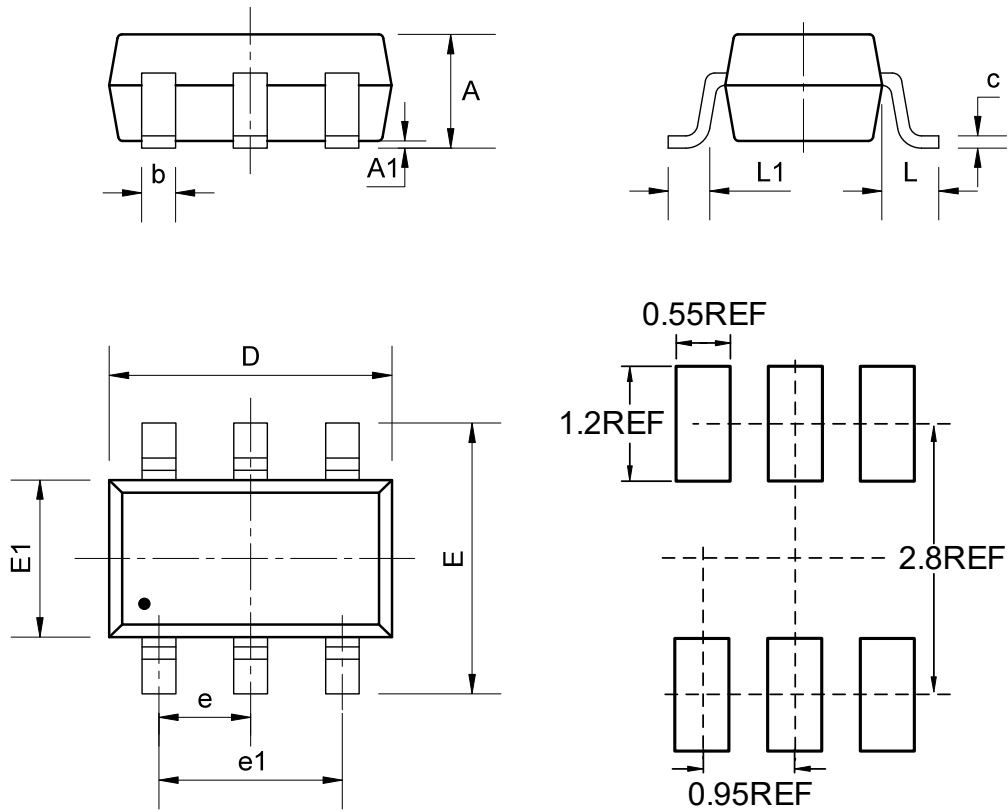


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.45
A1	0.00	-	0.15
b	0.28	0.35	0.50
c	0.08	0.15	0.22
D	2.75	2.9	3.05
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
E	2.60	2.80	3.00
E1	1.45	1.6	1.75
L	0.60REF		
L1	0.30	0.45	0.60

ET74AHCT2G07

DFN6 (1.0mm × 1.5mm)

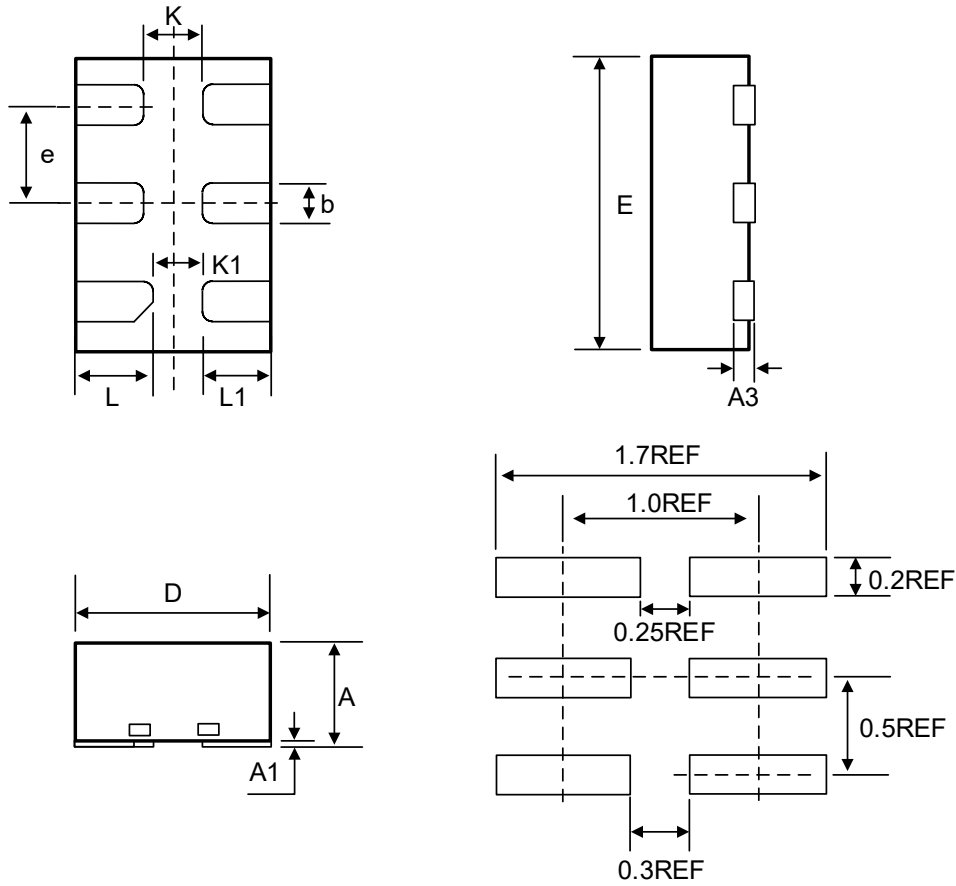

COMMON DIMENSIONS


(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.50BSC		
K	0.30REF		
K1	0.25REF		
L	0.35	0.40	0.45
L1	0.30	0.35	0.40


ET74AHCT2G07

Tape Information


SC70-6 (1.3mm × 2.1mm)

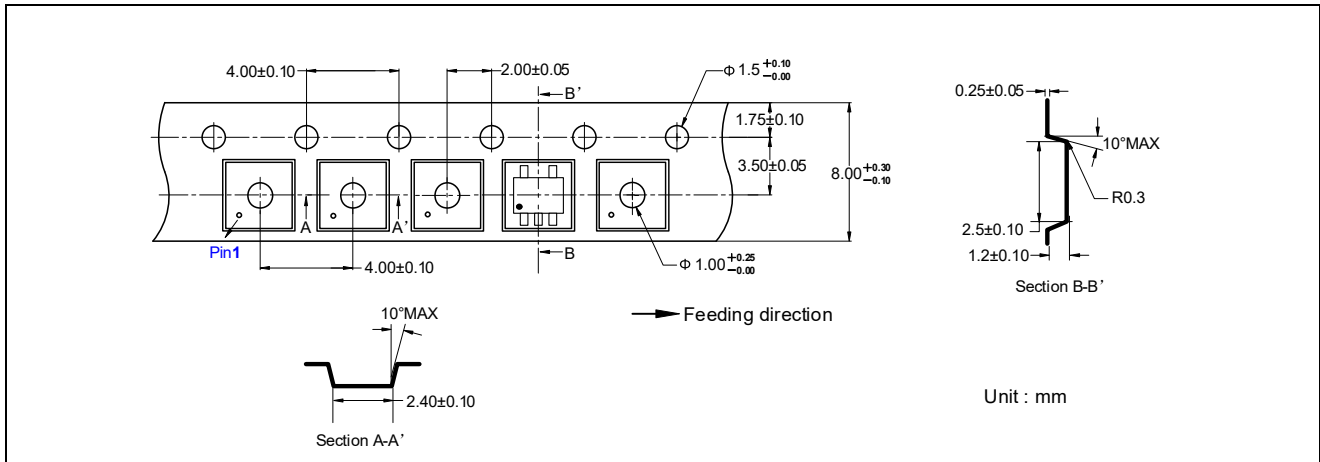

SOT23-6 (1.6mm × 2.9mm)

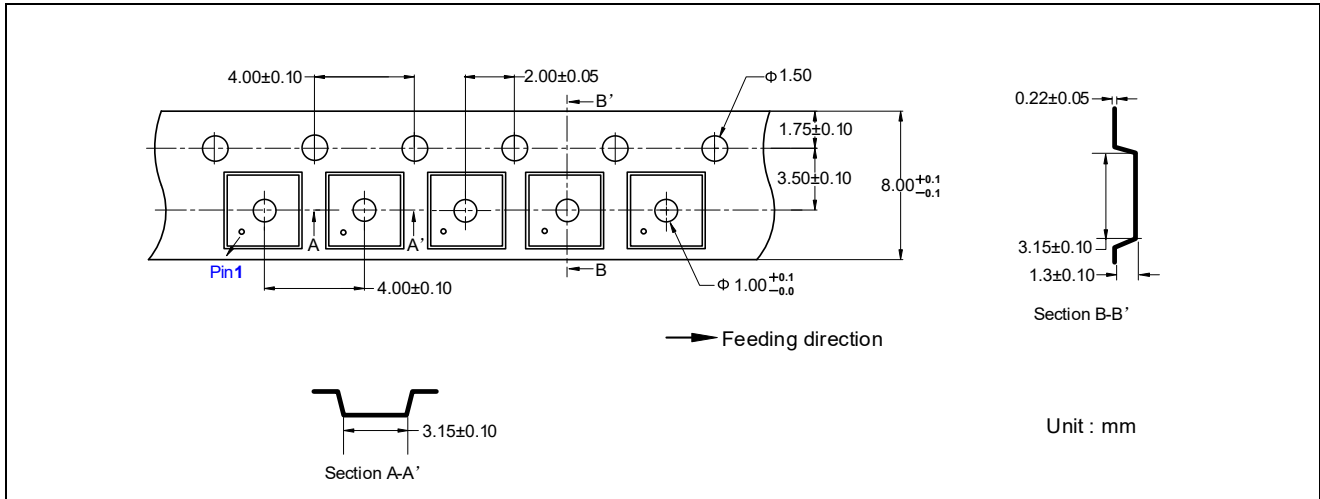

DFN6 (1.0mm × 1.5mm)

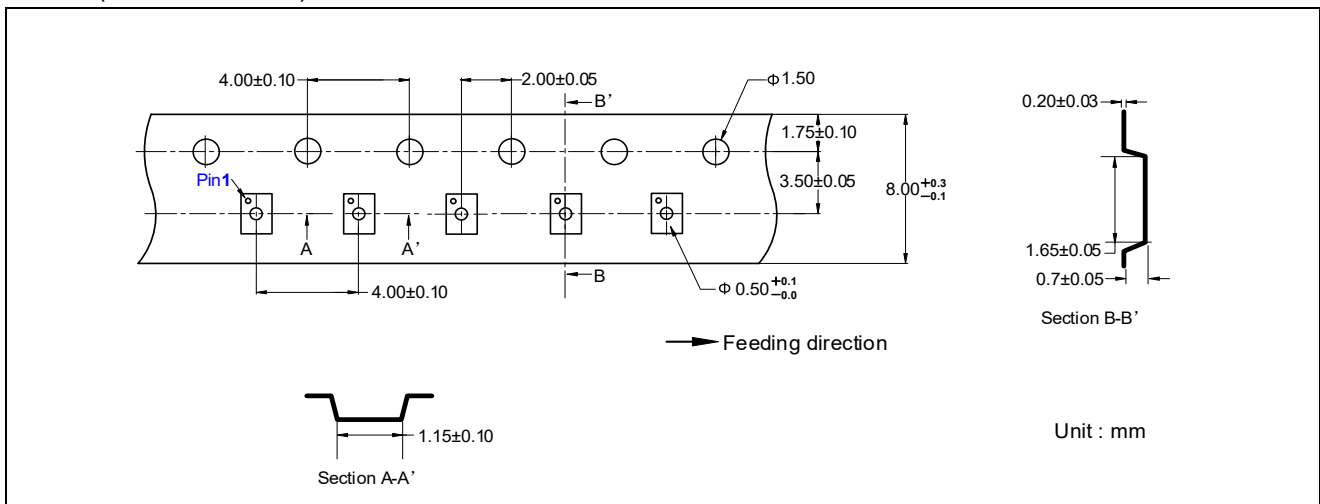

ET74AHCT2G07

Marking Information

T207X ● ET74AHCT2G07 T207 = Part Number X = Tracking Number	T207 XXXXX ● ET74AHCT2G07T T207 = Part Number XXXXX = Tracking Number
--	--

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2025-12-02	Official Version	Wang anran	Yang xiaoxu	Liu jiaying
1.0.a	2026-01-05	Update Format, Add Tape and Marking	Xu tao	Yang xiaoxu	Liu jiaying
1.0.b	2026-04-22	Correct Words	Xu tao	Yang xiaoxu	Liu jiaying