

Hex Buffer and Driver With Open-Drain Outputs

General Description

The ET74HC07 device is a hex buffer and driver operating from a 2.0V to 6.0V supply. This device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive.

Features

- Wide Operating Voltage Range: 2.0V to 6.0V
- Over-voltage Tolerant Inputs Accept Voltages to 6.0V
- 5.2mA Output Sink Capability
- ESD Protection Complies with JESD22 Standard
 - HBM: $\pm 4000\text{V}$ Pass (JEDEC JS-001)
 - CDM: $\pm 1000\text{V}$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 100\text{mA}$ per JEDEC JESD78F
- Part No. and Package Information


Part No.	Package	Packing Option	MSL
ET74HC07M	SOP14 (3.9mm × 8.65mm)	Tape and Reel, 4K/Reel	3
ET74HC07V	TSSOP14 (4.4mm × 5.0mm)	Tape and Reel, 4K/Reel	3

Applications

- Mobile Device
- AV Receiver
- Audio Dock: Portable
- Blu-ray Player and Home Theater
- MP3 Player or Recorder
- Personal Digital Assistant (PDA)
- Power: Telecom/Server AC/DC Supply: Single
- Controller: Analog and Digital
- Solid State Drive (SSD): Client and Enterprise
- TV: LCD, Digital, and High-definition (HDTV)
- Tablet: Enterprise
- Video Analytics: Server
- Wireless Headset, Keyboard and Mouse

ET74HC07

Pin Configuration

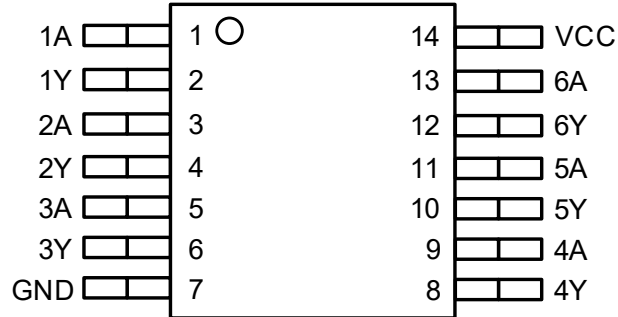

SOP14/TSSOP14

Figure1. Pin Configuration

Pin Function

Pin No.	Pin Name	I/O	Description
1	1A	Input	Channel 1, Input A
2	1Y	Input	Channel 1, Output Y
3	2A	Output	Channel 2, Input A
4	2Y	Input	Channel 2, Output Y
5	3A	Input	Channel 3, Input A
6	3Y	Output	Channel 3, Output Y
7	GND	—	Ground
8	4Y	Output	Channel 4, Output Y
9	4A	Input	Channel 4, Input A
10	5Y	Input	Channel 5, Output Y
11	5A	Output	Channel 5, Input A
12	6Y	Input	Channel 6, Output Y
13	6A	Input	Channel 6, Input A
14	VCC	—	Positive Supply

Block Diagram




Figure2. Logic Symbol

ET74HC07

Functional Table

Input	Output
xA	xY
L	L
H	Z

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage (V _{CC} Pin)		-0.5 to 7.0	V
I _{IK}	DC Input Diode Current, V _I < GND		±20	mA
V _I	DC Input Voltage ⁽¹⁾		-0.5 ≤ V _I ≤ 7.0	V
I _{OK}	DC Output Diode Current, V _O < GND		±20	mA
V _O	DC Output Voltage Output in Higher or Low State		-0.5 to V _{CC} + 0.5	V
I _O	DC Output Sink Current, V _O = 0V to V _{CC}		±25	mA
I _{CC}	DC Supply Current per Supply Pin		50	mA
I _{GND}	DC Ground Current per Supply Pin		-50	mA
T _J	Max Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-65 to 150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch Up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_O absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch up Current Maximum Rating tested per JEDEC JESD78F.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage Operating	2.0	6.0	V
V _I	DC Input Voltage	0	V _{CC}	V
V _O	DC Output Voltage (High or Low State)	0	V _{CC}	V
T _A	Operating Temperature Range	-40	125	°C

ET74HC07

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		2.0	1.5			1.5		V
			4.5	3.15			3.15		
			6.0	4.2			4.2		
V _{IL}	Low-Level Input Voltage		2.0			0.5		0.5	V
			4.5			1.35		1.35	
			6.0			1.8		1.8	
V _{OL}	Low-Level Output Voltage	I _{OL} = 20μA	2~6	V _{CC} - 0.1	V _{CC}		V _{CC} - 0.1		V
		I _{OL} = 4mA	4.5	4.13	4.32		3.7		
		I _{OL} = 5.2mA	6.0	5.63	5.81		5.2		
I _I	Input Leakage Current	V _I = 6V or GND	0~6		±0.1			±1.0	μA
I _{OFF}	Power Off Leakage Current	V _I = 6V or V _O = 6V	0			1		10	μA
I _{CC}	Quiescent Supply Current	V _I = 6V or GND	6			1		10	μA

ET74HC07

AC Electrical Characteristics

Over operating free-air temperature range; typical values measured at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Symbol	Parameter	From	To	$V_{CC}(\text{V})$	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$		Unit
					Min	Typ	Max	Min	Max	
t_{PZL}	Propagation Delay	A	Y	2		13	33		39	ns
t_{PLZ}				4.5		4.3	4.9		5.6	
				6		3.9	4.4		4.9	

Capacitance Characteristics

Over operating free-air temperature range; typical values measured at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Symbol	Parameter	Test Conditions	Typ	Unit
C_{IN}	Input Capacitance	$V_{CC} = 6\text{V}$, $V_I = 0\text{V}$ or V_{CC}	5	pF
C_{PD}	Power Dissipation Capacitance Per Inverter ⁽⁵⁾	10MHz, $V_{CC} = 6\text{V}$, $V_I = 0\text{V}$ or V_{CC}	25	pF

Note5: C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = input frequency in MHz;

f_o = output frequency in MHz;


C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

$\Sigma(C_L \times V_{CC}^2 \times f_o)$ = sum of outputs.


Parameter Measurement Information

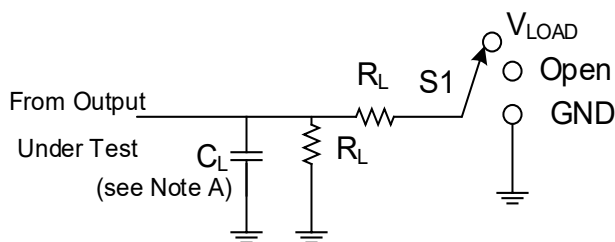

TEST	S1
t_{PLH}/t_{PHL}	OPEN
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

Figure3. Test circuit for Measuring Switching Times

ET74HC07

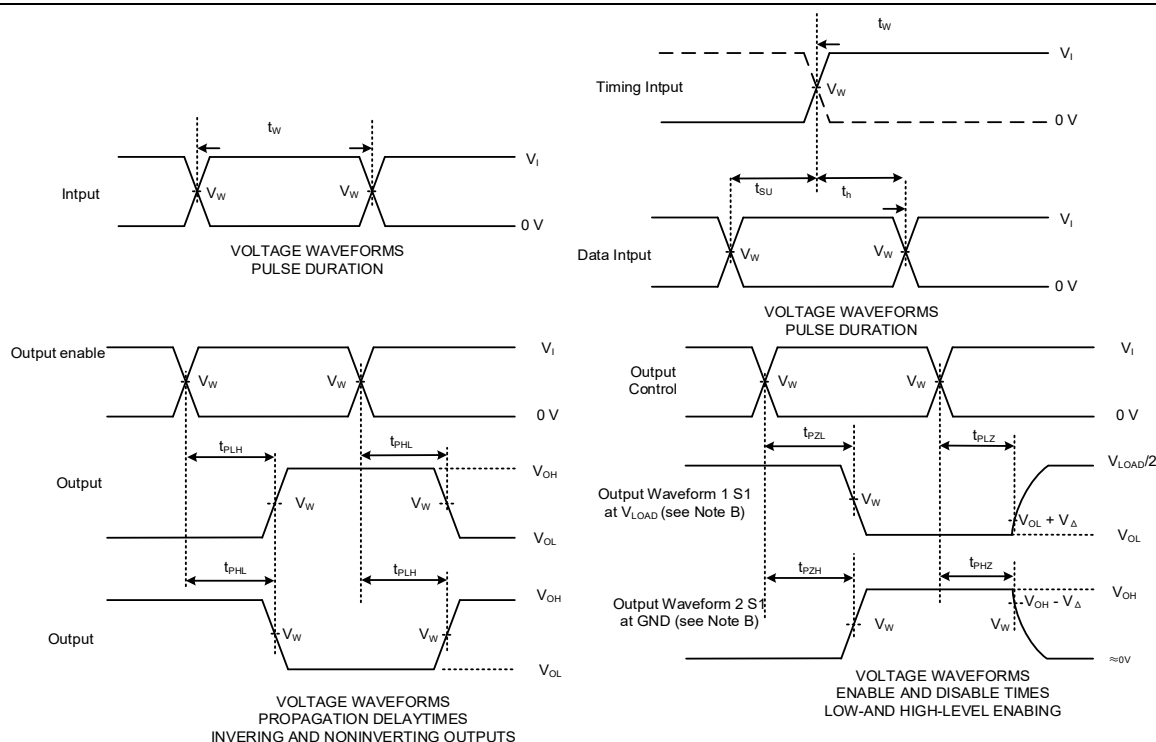

Notes:


- C_L includes probe and jig capacitance.
- Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
- Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- All input pulses are supplied by generators having the following characteristics:
 $PRR \leq 10\text{MHz}$, $Z_O = 50\Omega$
- The outputs are measured one at a time, with one transition per measurement.
- t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- t_{PZL} and t_{PZH} are the same as t_{en} .
- t_{PLH} and t_{PHL} are the same as t_{pd} .
- All parameters and waveforms are not applicable to all devices.

Figure4. Input to Output Propagation Delay Times

ET74HC07

Package Dimension

SOP14 (3.9mm × 8.65mm)

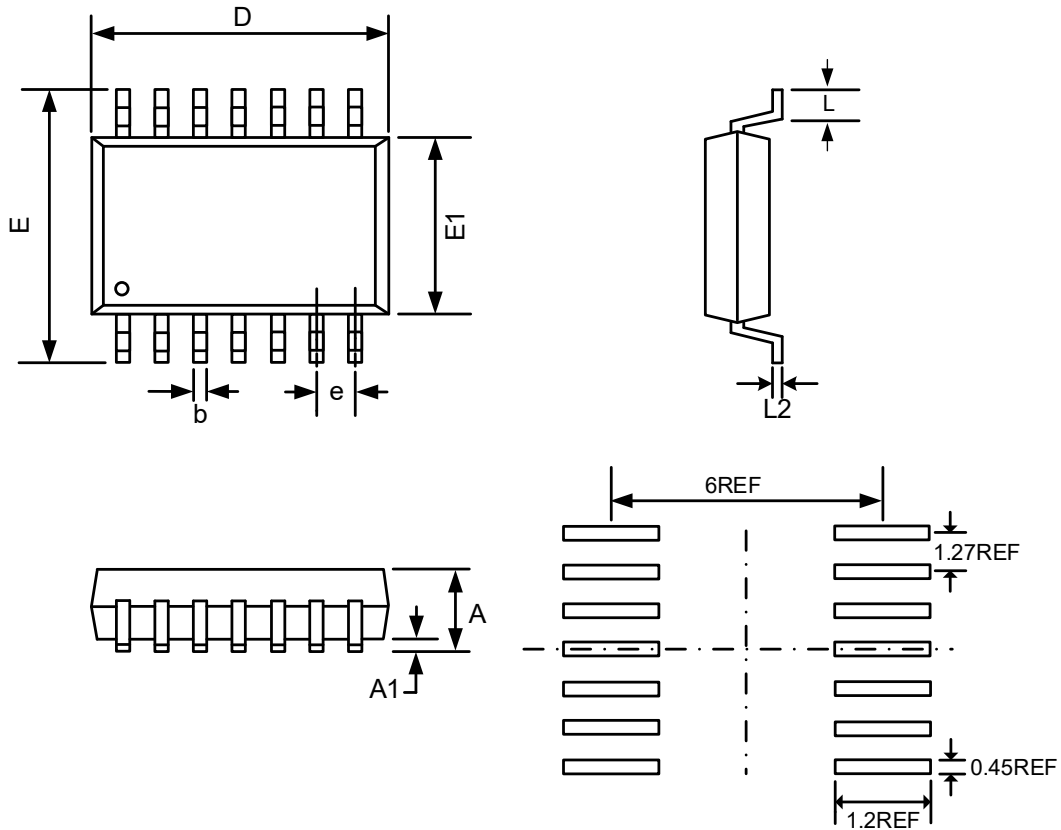


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	MAX
A	--	1.75
A1	0.10	0.25
b	0.36	0.51
D	8.55	8.75
E	5.80	6.20
E1	3.80	4.00
e	1.22	1.32
L	0.45	0.75
L2	0.25 BSC	

ET74HC07

TSSOP14 (4.4mm × 5.0mm)

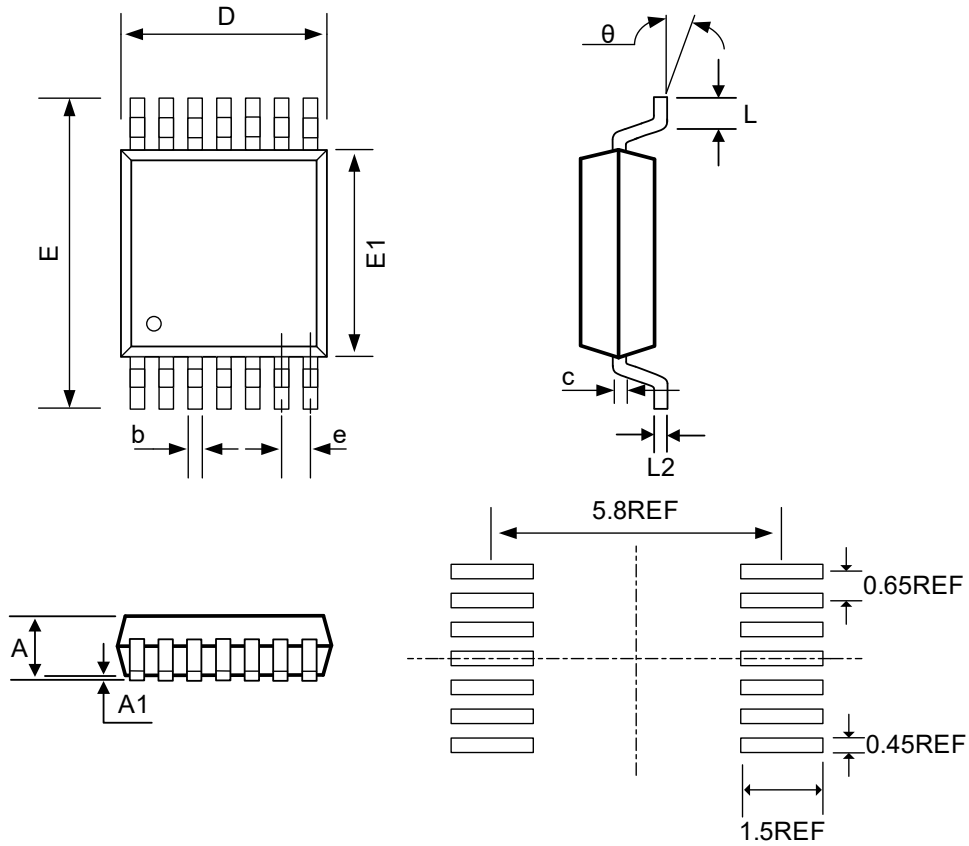

COMMON DIMENSIONS


(Unit: mm)

SYMBOL	MIN	MAX
A	--	1.20
A1	0.05	0.15
b	0.19	0.30
c	0.15 REF	
D	4.86	5.10
E	6.20	6.60
E1	4.30	4.50
e	0.65BSC	
L	0.45	0.75
L2	0.25 REF	
θ	0°	8°


ET74HC07

Tape Information

SOP14 (3.9mm × 8.65mm)

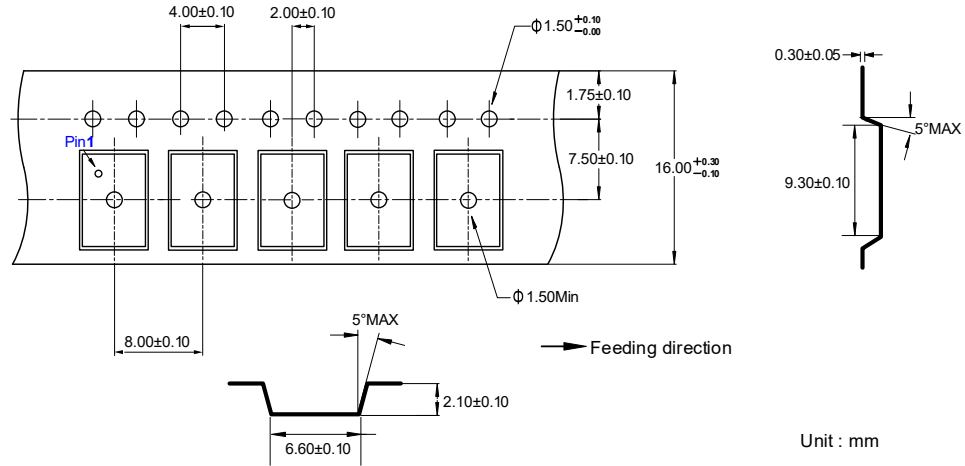

TSSOP14 (4.4mm × 5.0mm)

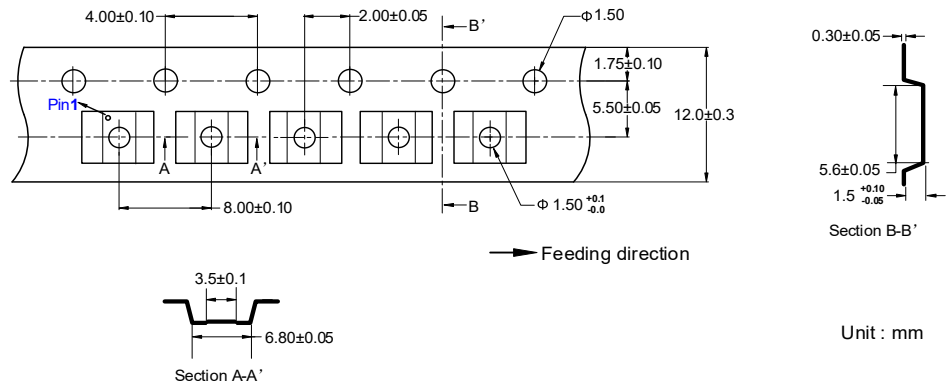

ET74HC07

Marking Information

C07A
XXXXX
●

ET74HC07M
C07A = Part Number
XXXXX = Tracking Number

07A
XXXXX
●

ET74HC07V
07A = Part Number
XXXXX = Tracking Number

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2026-03-23	Official Version	Xu tao	Yang xiaoxu	Liu jiaying