

Non-inverting 1-to-2 Demultiplexer with 3-state Deselected

General Description


The ET74LV1T18 is a high-performance non-inverting 1-to-2 demultiplexer. With the Select input [S] at Low, data at A is passed to Y0 and Y1 is set to high impedance. With the Select input [S] at High, data at A is passed to Y1 and Y0 is set to high impedance. The device operates over the voltage range from 1.6V to 5.5V.

Features

- Designed for 1.6V to 5.5V V_{CC} Operation
- Over-voltage Tolerant Inputs Accept Voltages to 5.5V
- $\pm 8\text{mA}$ Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and RoHS Compliant
- ESD Protection Complies with JESD22 Standard
 - HBM: $\pm 4000\text{V}$ Pass (JEDEC JS-001)
 - CDM: $\pm 1000\text{V}$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 100\text{mA}$ per JEDEC JESD78F
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74LV1T18	SC70-6 (1.3mm $\times$ 2.1mm)	Tape and Reel, 3K/Reel	1
ET74LV1T18T	SOT23-6 (1.6mm $\times$ 2.9mm)	Tape and Reel, 3K/Reel	3
ET74LV1T18Y	DFN6 (1.0mm $\times$ 1.5mm)	Tape and Reel, 3K/Reel	1

Pin Configuration

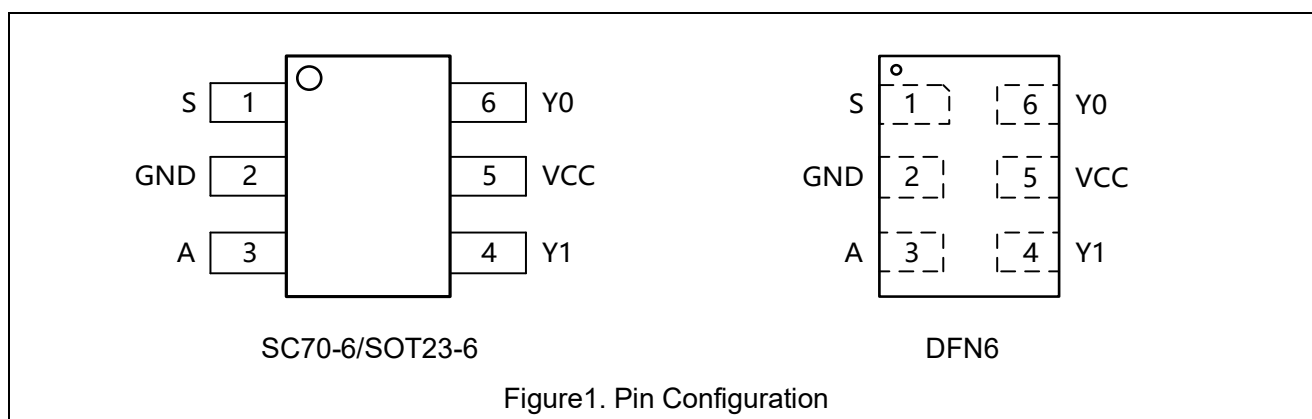

ET74LV1T18

Pin Function

Pin No.	Pin Name	Pin Function
1	S	Demultiplexer Select
2	GND	Ground
3	A	Data Input
4	Y1	Output 2
5	VCC	Power
6	Y0	Output 1

Block Diagram

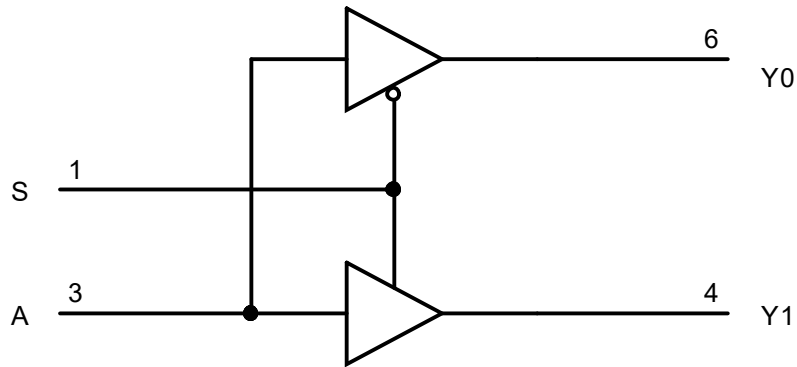


Figure2. Logic Symbol

Functional Table

Input		Output	
S	A	Y0	Y1
L	L	L	Z
L	H	H	Z
H	L	Z	L
H	H	Z	H

ET74LV1T18

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to 7.0	V
V _I	DC Input Voltage ⁽¹⁾		-0.5 ≤ V _I ≤ 7.0	V
V _O	DC Output Voltage Output in Higher or Low State		-0.5 to V _{CC} + 0.5	V
I _{IK}	DC Input Diode Current, V _I < GND		-50	mA
I _{OK}	DC Output Diode Current, V _O < GND, V _O > V _{CC}		±50	mA
I _O	DC Output Sink Current		±50	mA
I _{CC}	DC Supply Current per Supply Pin		100	mA
I _{GND}	DC Ground Current per Supply Pin		-100	mA
T _{STG}	Storage Temperature Range		-65 to 150	°C
T _L	Lead Temperature, Soldering 10 Seconds		260	°C
T _J	Max Junction Temperature		150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±100	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_O absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch up Current Maximum Rating tested per JEDEC JESD78F.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-6	Thermal Characteristics, Thermal Resistance, Junction-to-Air	280	°C/W
	SOT23-6		180	
	DFN6		440	
P _D	SC70-6	Power Dissipation in Still Air at 85°C	230	mW
	SOT23-6		360	
	DFN6		150	

Recommended Operating Conditions

Symbol	Parameter		Min	Max	Unit
V _{CC}	DC Supply Voltage Operating		1.6	5.5	V
V _I	DC Input Voltage		0	V _{CC}	V
V _O	DC Output Voltage (High or Low State)		0	V _{CC}	V
T _A	Operating Temperature Range		-40	125	°C
t _r , t _f	Input Rise and Fall Time	V _{CC} = 1.6V to 5.5V	0	20	ns/V

ET74LV1T18

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-level Input Voltage		1.65~1.8	0.94			1.0		V
			2.0	0.99			1.03		
			2.25~2.5	1.135			1.18		
			2.75	1.21			1.23		
			3.0~3.3	1.35			1.37		
			3.6	1.47			1.48		
			4.5~5.0	2.02			2.03		
			5.5	2.10			2.11		
V _{IL}	Low-level Input Voltage		1.65~2.0			0.45		0.40	V
			2.25~2.75			0.75		0.71	
			3.0~3.6			0.80		0.65	
			4.5~5.5			0.80		0.80	
V _{OH}	High-level Output Voltage	I _{OH} = -20μA	1.65~5.5	V _{CC} - 0.1	V _{CC}		V _{CC} - 0.1		V
		I _{OH} = -2mA	1.65	1.28			1.21		
		I _{OH} = -2mA	1.8	1.5			1.45		
		I _{OH} = -2.3mA	2.3	2.0			2.0		
		I _{OH} = -3mA	2.3	2.0			1.93		
		I _{OH} = -3mA	2.5	2.25			2.15		
		I _{OH} = -3mA	3.0	2.78			2.7		
		I _{OH} = -5.5mA	3.0	2.6			2.49		
		I _{OH} = -5.5mA	3.3	2.9			2.8		
		I _{OH} = -4mA	4.5	4.2			4.1		
		I _{OH} = -8mA	4.5	4.1			3.95		
		I _{OH} = -8mA	5.5	4.6			4.5		
V _{OL}	Low-level Output Voltage	I _{OL} = 20μA	1.65~5.5			0.1		0.1	V
		I _{OL} = 2mA	1.65			0.2		0.25	
		I _{OL} = 2.3mA	2.3			0.1		0.15	
		I _{OL} = 3mA	2.3			0.15		0.2	
		I _{OL} = 3mA	3.0			0.1		0.15	
		I _{OL} = 5.5mA	3.0			0.2		0.252	
		I _{OL} = 4mA	4.5			0.15		0.2	
		I _{OL} = 8mA	4.5			0.3		0.35	

ET74LV1T18

DC Electrical Characteristics (Continued)

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
I _I	Input Leakage Current	V _I = 5.5V or GND	0~5.5			±0.1		±1.0	μA
I _{oz}	OFF-state output current					±0.25		±2.5	μA
I _{CC}	Quiescent Supply Current	V _I = 5.5V or GND	5.5			1.0		10	μA
ΔI _{CC}	Additional Supply Current	Per Input Pin; V _I = 0.3V or 1.1V; I _O = 0mA; Other Pins at V _{CC} or GND	1.8			10		10	μA
		Per Input Pin; V _I = 0.3V or 3.4V; I _O = 0mA; Other Pins at V _{CC} or GND	5.5			1.35		1.5	mA

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.

ET74LV1T18

AC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
t _{PLH} t _{PHL}	Propagation Delay (Figure3 & 4)	C _L = 15pF	1.8		13.3	16.5		18.5	ns
		C _L = 30pF	1.8		14.2	17.7		18.7	
		C _L = 15pF	2.5		8.4	10.4		12	
		C _L = 30pF	2.5		9.1	11.3		13	
		C _L = 15pF	3.3		6.7	8.3		9.4	
		C _L = 30pF	3.3		7.3	8.9		10.2	
		C _L = 15pF	5.0		5.6	6.5		7.3	
		C _L = 30pF	5.0		6	7		7.9	
t _{PZL} t _{PZH}	Output Enable Time (Figure5 & 6)	C _L = 15pF	1.8		13.3	16.5		18.5	ns
		C _L = 30pF	1.8		14.2	17.7		20.2	
		C _L = 15pF	2.5		9.9	11.9		13.5	
		C _L = 30pF	2.5		10.7	12.8		14.5	
		C _L = 15pF	3.3		6.8	8.3		9.4	
		C _L = 30pF	3.3		7.5	8.9		10.2	
		C _L = 15pF	5.0		5.8	6.7		7.6	
		C _L = 30pF	5.0		6.2	7.2		8.3	
t _{PLZ} t _{PHZ}	Output Disable Time (Figure5 & 6)	C _L = 15pF	1.8		15.1	18.1		20.1	ns
		C _L = 30pF	1.8		18.2	21.1		23.1	
		C _L = 15pF	2.5		12	13.5		15.1	
		C _L = 30pF	2.5		13.9	15.5		17.1	
		C _L = 15pF	3.3		9.9	11.1		12.1	
		C _L = 30pF	3.3		11.4	12.6		13.6	
		C _L = 15pF	5.0		7.5	8.5		9	
		C _L = 30pF	5.0		8.4	9.4		10	

Capacitance Characteristics

Symbol	Parameter	Condition	Typ	Unit
C _{IN}	Input Capacitance	V _{CC} = 5.5V, V _I = 0V or V _{CC}	5	pF
C _{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, V _{CC} = 3.3V, V _I = 0V or V _{CC}	15	pF
		10MHz, V _{CC} = 5.5V, V _I = 0V or V _{CC}	15	

Note5: C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o) \text{ where:}$$

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

Σ(C_L × V_{CC}² × f_o) = sum of outputs.

ET74LV1T18

AC Test Circuit

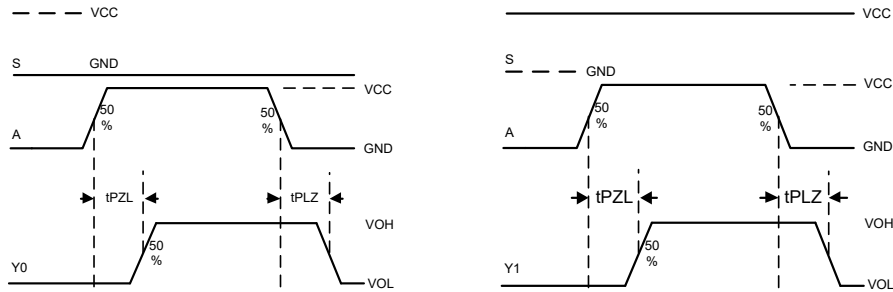


Figure3. Switching Waveform

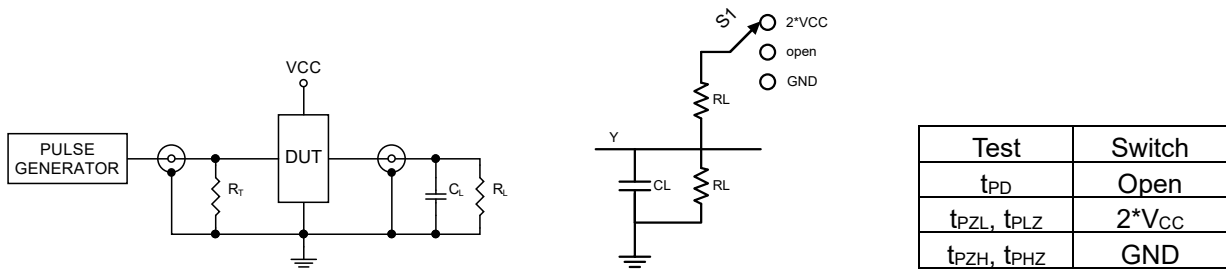


Figure4. Test Circuit $R_T = 50\Omega(\text{typ})$

Figure5. Output Enable/Disable Time Test Circuit


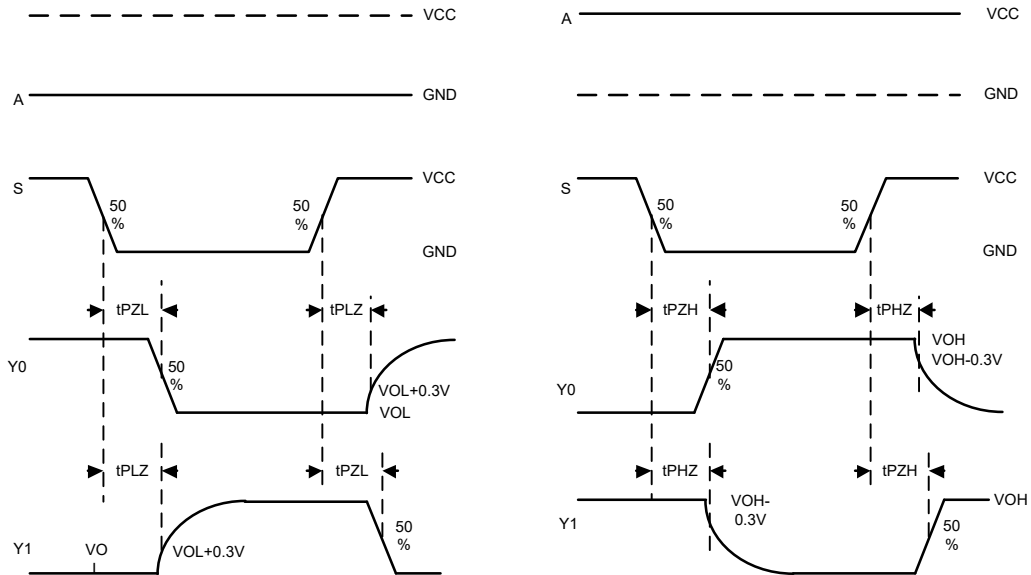


Figure6. Output Enable/Disable Waveform

ET74LV1T18

Package Dimension

SC70-6 (1.3mm × 2.1mm)

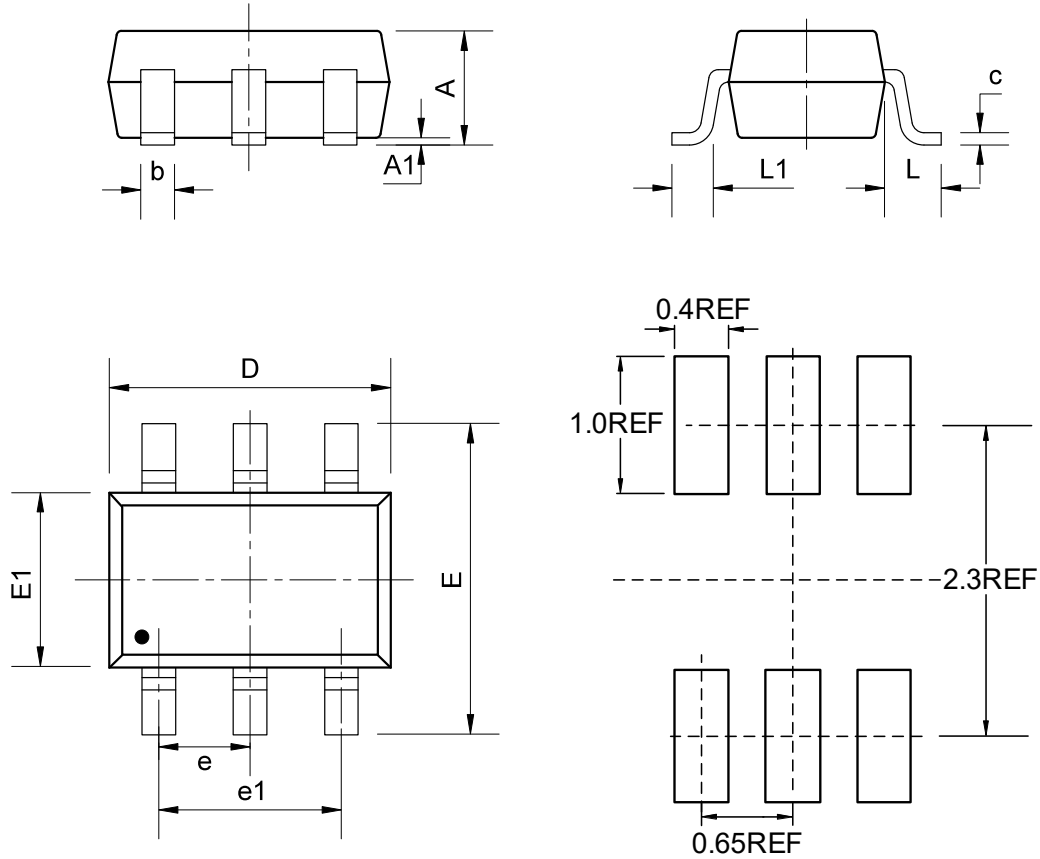


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.10
A1	0.00	-	0.15
b	0.15	-	0.35
c	0.08	-	0.20
D	2.00	2.10	2.30
e	0.65BSC		
e1	1.30BSC		
E	2.15	2.30	2.50
E1	1.15	1.30	1.45
L	0.50REF		
L1	0.33REF		

ET74LV1T18

SOT23-6 (1.6mm × 2.9mm)

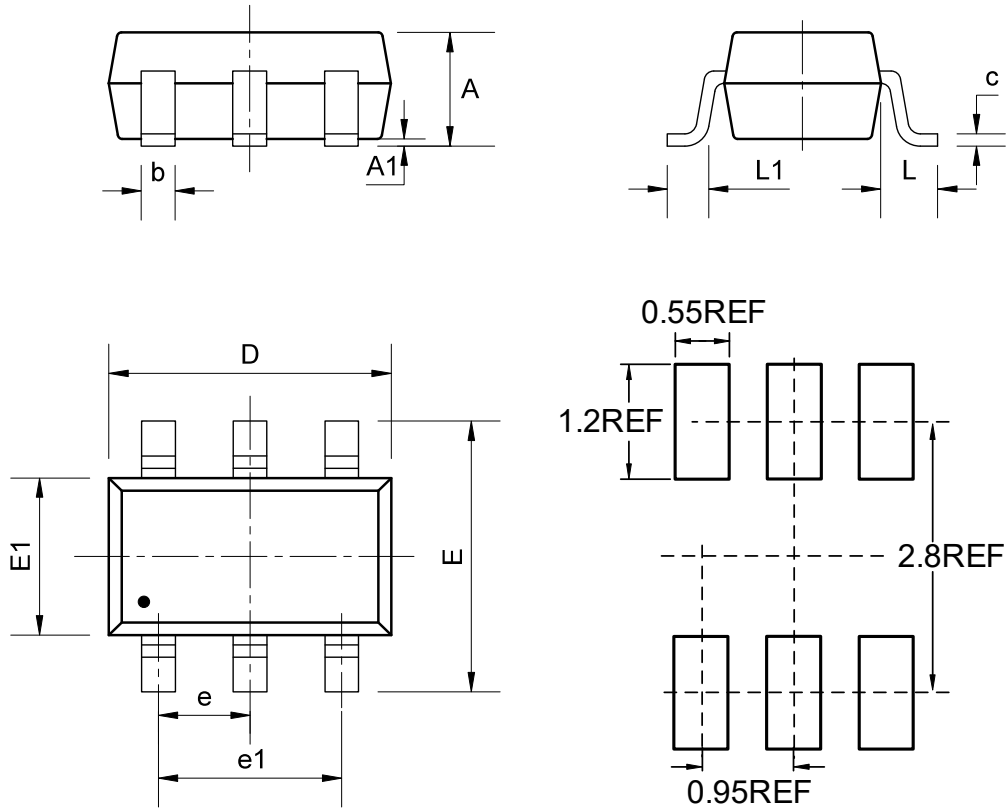


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	-	-	1.45
A1	0.00	-	0.15
b	0.28	0.35	0.50
c	0.08	0.15	0.22
D	2.75	2.9	3.05
e	0.90	0.95	1.00
e1	1.80	1.90	2.00
E	2.60	2.80	3.00
E1	1.45	1.6	1.75
L	0.60REF		
L1	0.30	0.45	0.60

ET74LV1T18

DFN6 (1.0mm × 1.5mm)

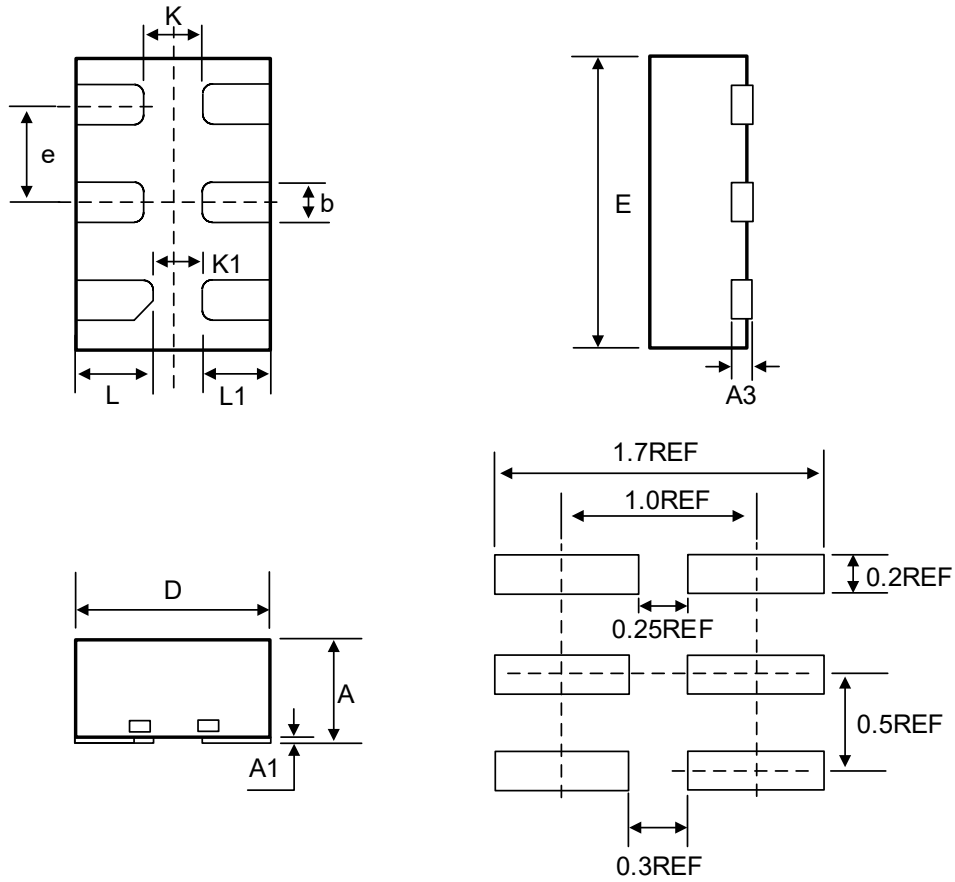


COMMON DIMENSIONS
(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.50BSC		
K	0.30REF		
K1	0.25REF		
L	0.35	0.40	0.45
L1	0.30	0.35	0.40


ET74LV1T18

Tape Information


SC70-6 (1.3mm × 2.1mm)

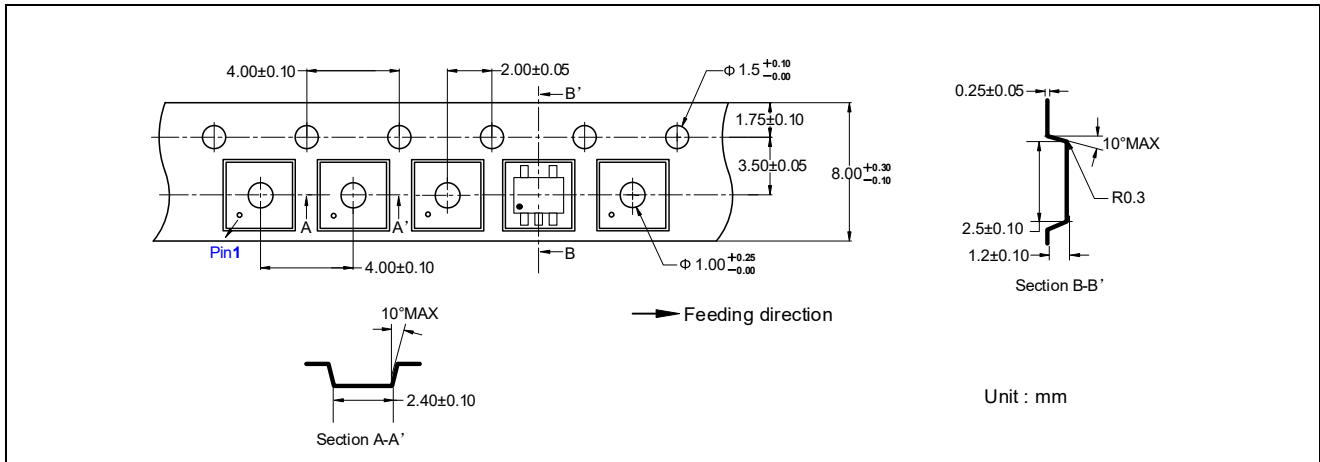

SOT23-6 (1.6mm × 2.9mm)

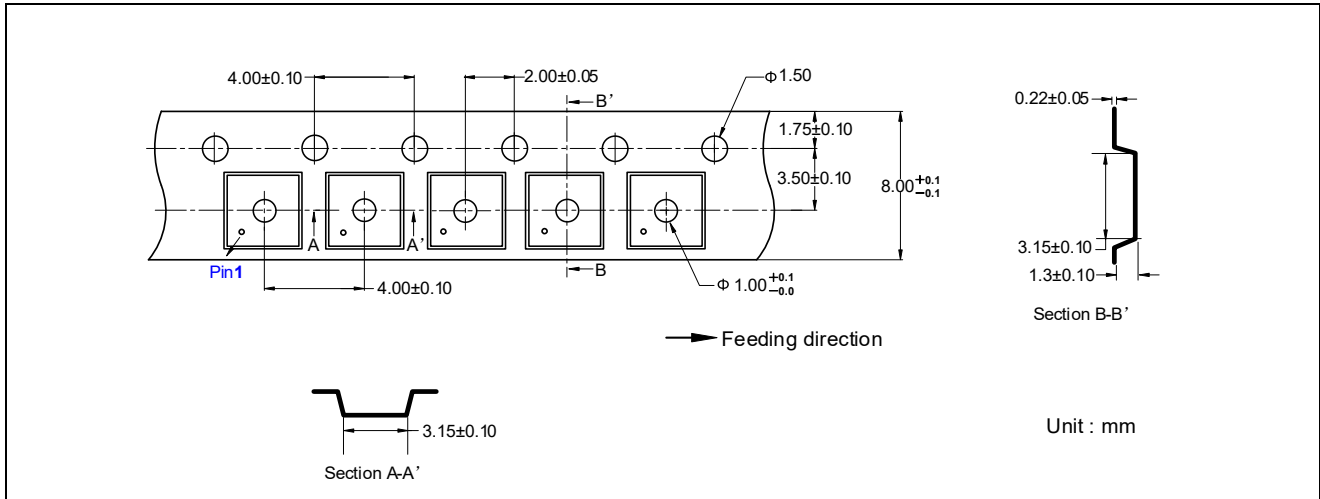

DFN6 (1.0mm × 1.5mm)

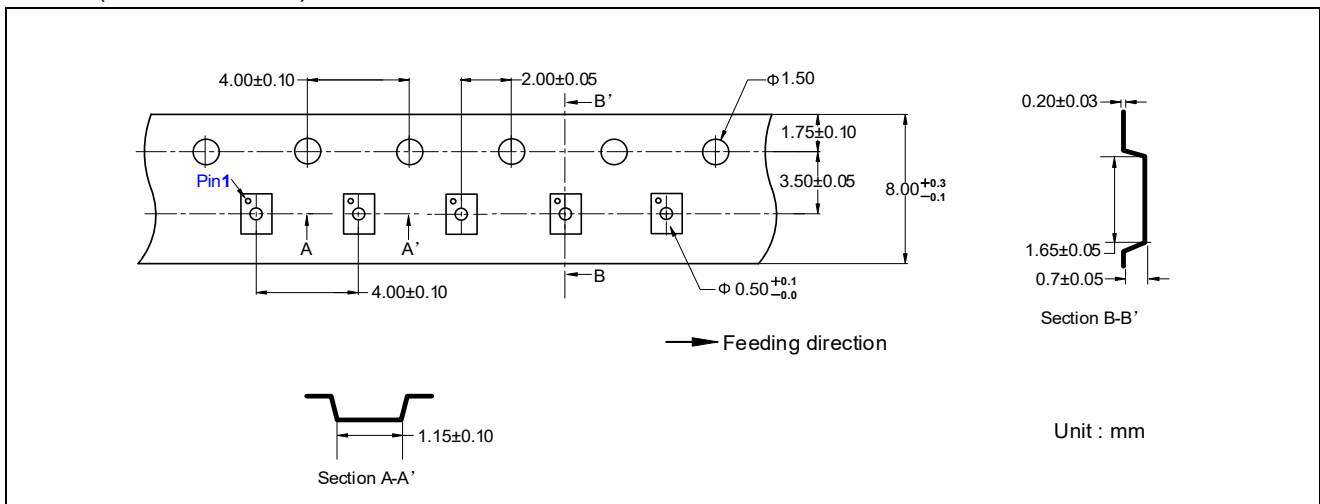

ET74LV1T18

Marking Information

T118X ET74LV1T18 T118 = Part Number X = Tracking Number	T118 XXXXX ET74LV1T18T T118 = Part Number XXXXX = Tracking Number
---	---

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2026-04-08	Official Version	Xu tao	Yang xiaoxu	Liu jiaying