

Quadruple 2-Input AND Gates

General Description

The ET74LVC08A contains four independent 2-input AND gates operating from a 1.65 to 5.5 V supply. This device is fabricated with advanced CMOS technology to achieve ultra-high-speed operation with high output drive capability.

Features


- Designed for 1.65V to 5.5V V_{CC} Operation
- Over-voltage Tolerant Inputs Accept Voltages to 5.5V
- $\pm 24\text{mA}$ Balanced Output Sink and Source Capability
- Near-zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and RoHS Compliant
- ESD Protection Complies with JESD22 Standard
 - HBM: $\pm 2000\text{V}$ Pass (JEDEC JS-001)
 - CDM: $\pm 1000\text{V}$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 200\text{mA}$ per JEDEC JESD78F
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74LVC08AM14	SOP14 (3.9mm $\times$ 8.65mm)	Tape and Reel, 4K/Reel	3
ET74LVC08AV	TSSOP14 (4.4mm $\times$ 5.0mm)	Tape and Reel, 4K/Reel	3

Applications

- Mobile Device

Pin Configuration

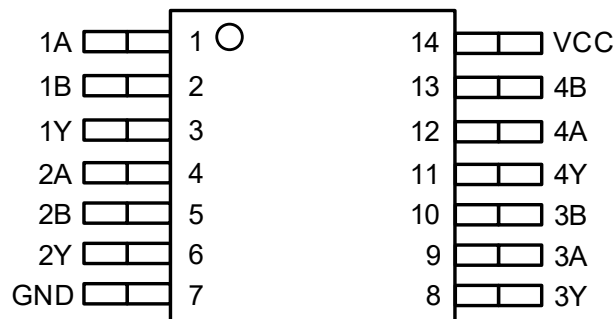

SOP14/TSSOP14

Figure1. Pin Configuration

ET74LVC08A

Pin Function

Pin No.	Pin Name	I/O	Description
1	1A	Input	Channel 1, Input A
2	1B	Input	Channel 1, Input B
3	1Y	Output	Channel 1, Output Y
4	2A	Input	Channel 2, Input A
5	2B	Input	Channel 2, Input B
6	2Y	Output	Channel 2, Output Y
7	GND	—	Ground
8	3Y	Output	Channel 3, Output Y
9	3A	Input	Channel 3, Input A
10	3B	Input	Channel 3, Input B
11	4Y	Output	Channel 4, Output Y
12	4A	Input	Channel 4, Input A
13	4B	Input	Channel 4, Input B
14	VCC	—	Positive Supply

Block Diagram

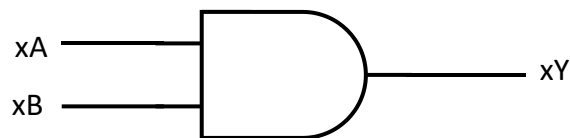


Figure2. Logic Symbol

Functional Table

Input		Output
xA	xB	xY
L	L	L
L	H	L
H	L	L
H	H	H

ET74LVC08A

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage (VCC Pin)		-0.5 to 6.5	V
I _{IK}	DC Input Diode Current, V _I < GND		-50	mA
V _I	DC Input Voltage ⁽¹⁾		-0.5 ≤ V _I ≤ 6.5	V
I _{OK}	DC Output Diode Current, V _O < GND		±50	mA
V _O	DC Output Voltage Output in Higher or Low State		-0.5 to V _{CC} + 0.5	V
I _O	DC Output Sink Current, V _O = 0V to V _{CC}		±50	mA
I _{CC}	DC Supply Current per Supply Pin		100	mA
I _{GND}	DC Ground Current per Supply Pin		-100	mA
T _J	Max Junction Temperature		150	°C
T _{STG}	Storage Temperature Range		-65 to 150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±2000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch Up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±200	mA

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_O absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch up Current Maximum Rating tested per JEDEC JESD78F.

Recommended Operating Conditions

Symbol	Parameter	Min	Max	Unit
V _{CC}	DC Supply Voltage Operating	1.65	5.5	V
V _I	DC Input Voltage	0	V _{CC}	V
V _O	DC Output Voltage (High or Low State)	0	V _{CC}	V
T _A	Operating Temperature Range	-40	125	°C

ET74LVC08A

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		1.65~1.95	0.65V _{CC}			0.65V _{CC}		V
			2.3~2.7	1.7			1.7		V
			2.7~3.6	2			2		V
			3.6~5.5	0.7V _{CC}			0.7V _{CC}		V
V _{IL}	Low-Level Input Voltage		1.65~1.95			0.35V _{CC}		0.35V _{CC}	V
			2.3~2.7			0.7		0.7	V
			2.7~3.6			0.8		0.8	V
			3.6~5.5			0.3V _{CC}		0.3V _{CC}	V
V _{OH}	High-Level Output Voltage	I _{OH} = -100μA	1.65~5.5	V _{CC} - 0.2			V _{CC} - 0.2		V
		I _{OH} = -4mA	1.65	1.29			1.05		
		I _{OH} = -8mA	2.3	1.9			1.55		
		I _{OH} = -12mA	2.7	2.2			2.05		
		I _{OH} = -12mA	3	2.4			2.25		
		I _{OH} = -24mA	3	2.3			2		
		I _{OH} = -24mA	5.5	4.8			4.5		
V _{OL}	Low-Level Output Voltage	I _{OL} = 100μA	1.65~5.5			0.1		0.3	V
		I _{OL} = 4mA	1.65			0.24		0.6	
		I _{OL} = 8mA	2.3			0.3		0.85	
		I _{OL} = 12mA	2.7			0.4		0.6	
		I _{OL} = 24mA	3			0.55		0.8	
		I _{OL} = 24mA	5.5			0.55		0.8	
I _I	Input Leakage Current	V _I = 5.5V or GND	5.5		±1	±20		±20	μA
I _{CC}	Quiescent Supply Current	V _I = 5.5V or GND	5.5			1		40	μA
I _{OFF}	Power Off Leakage Current	V _I = 5.5V or V _O = 5.5V	0			±10		±10	μA
ΔI _{CC}		One input at V _{CC} - 0.6V, Other inputs at V _{CC} or GND	1.65~5.5			500		5000	μA

ET74LVC08A

AC Electrical Characteristics

Over operating free-air temperature range; typical values measured at $T_A = 25^\circ\text{C}$ (unless otherwise noted)


Symbol	Parameter	From	To	$V_{CC}(\text{V})$	$T_A = 25^\circ\text{C}$			$-40^\circ\text{C} \leq T_A \leq 125^\circ\text{C}$		Unit
					Min	Typ	Max	Min	Max	
t_{PD}	Propagation Delay	A or B	Y	1.65~1.95	1	10.5	18	1	21.5	ns
				2.3~2.7	1	7.5	9	1	11.5	
				2.7	1	7.7	9	1	10.5	
				3.0~3.6	1	4.7	6	1	7.5	
				4.5~5.5		4.6	5		6.5	

Capacitance Characteristics

Over operating free-air temperature range; typical values measured at $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Symbol	Parameter	Condition	Typ	Unit
C_{IN}	Input Capacitance	$V_{CC} = 5\text{V}$, $V_I = 0\text{V}$ or V_{CC}	5	pF
C_{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, $V_{CC} = 1.8\text{V}$, $V_I = 0\text{V}$ or V_{CC}	7	pF
		10MHz, $V_{CC} = 2.5\text{V}$, $V_I = 0\text{V}$ or V_{CC}	9.8	pF
		10MHz, $V_{CC} = 3.3\text{V}$, $V_I = 0\text{V}$ or V_{CC}	10	pF
		10MHz, $V_{CC} = 5.5\text{V}$, $V_I = 0\text{V}$ or V_{CC}	13	pF


AC Test Circuit

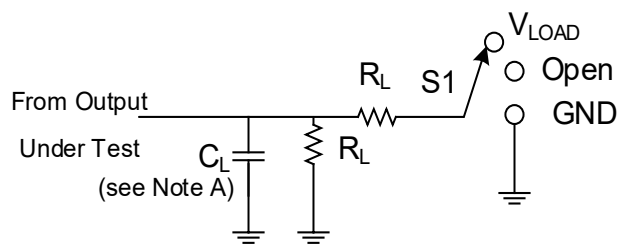

TEST	S1
t_{PLH}/t_{PHL}	V_{LOAD}
t_{PLZ}/t_{PZL}	V_{LOAD}
t_{PHZ}/t_{PZH}	GND

Figure3. Test circuit for measuring switching times

ET74LVC08A

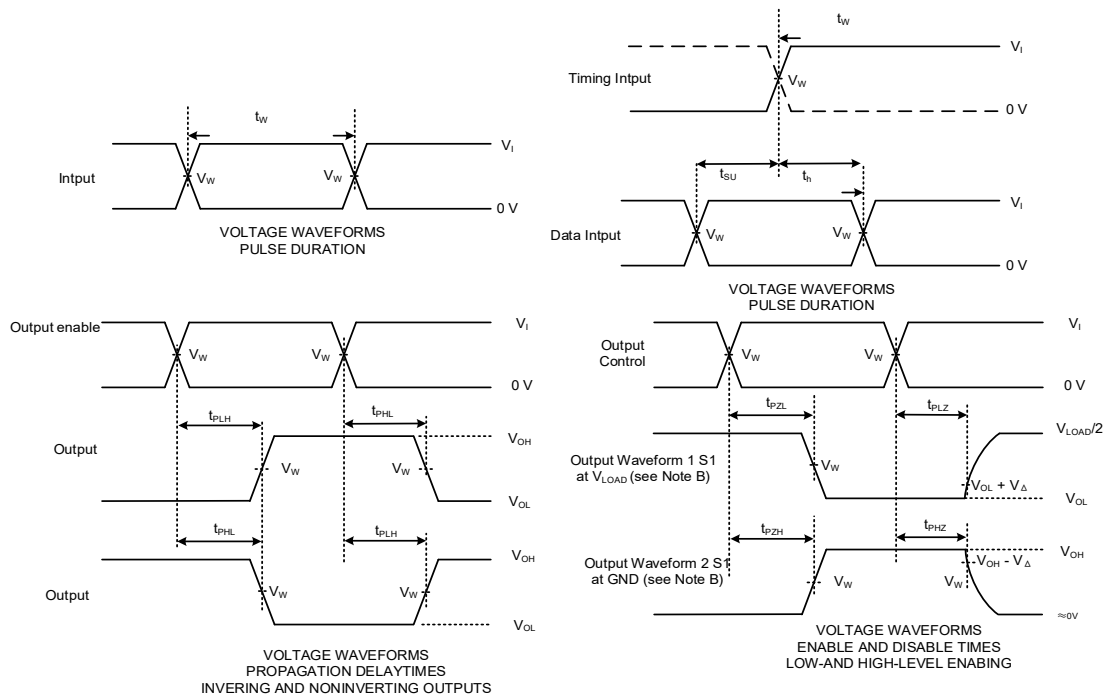

Notes:

- A. C_L includes probe and jig capacitance.
- B. Waveform 1 is for an output with internal conditions such that the output is low, except when disabled by the output control.
- C. Waveform 2 is for an output with internal conditions such that the output is high, except when disabled by the output control.
- D. All input pulses are supplied by generators having the following characteristics:
 $PRR \leq 10 \text{ MHz}$, $Z_O = 50\Omega$
- E. The outputs are measured one at a time, with one transition per measurement.
- F. t_{PLZ} and t_{PHZ} are the same as t_{dis} .
- G. t_{PZL} and t_{PZH} are the same as t_{en} .
- H. t_{PLH} and t_{PHL} are the same as t_{pd} .
- I. All parameters and waveforms are not applicable to all devices.

Figure4. Input to Output Propagation Delay Times


Table1. Measurement Points and Test Data

V_{CC}	Input		V_M	V_{LOAD}	C_L	R_L	V_{Δ}
	V_I	t_r/t_f					
$1.8V \pm 0.15V$	V_{CC}	$\leq 3ns$	$V_{CC}/2$	$2 \times V_{CC}$	30pF	1k Ω	0.15V
$2.5V \pm 0.2V$	V_{CC}	$\leq 3ns$	$V_{CC}/2$	$2 \times V_{CC}$	30pF	500 Ω	0.15V
2.7V	2.7V	$\leq 3ns$	1.5V	6V	50pF	500 Ω	0.3V
$3.3V \pm 0.3V$	2.7V	$\leq 3ns$	1.5V	6V	50pF	500 Ω	0.3V
5.5V	V_{CC}	$\leq 3ns$	$V_{CC}/2$	$2 \times V_{CC}$	50pF	500 Ω	0.3V

ET74LVC08A

Package Dimension

SOP14 (3.9mm × 8.65mm)

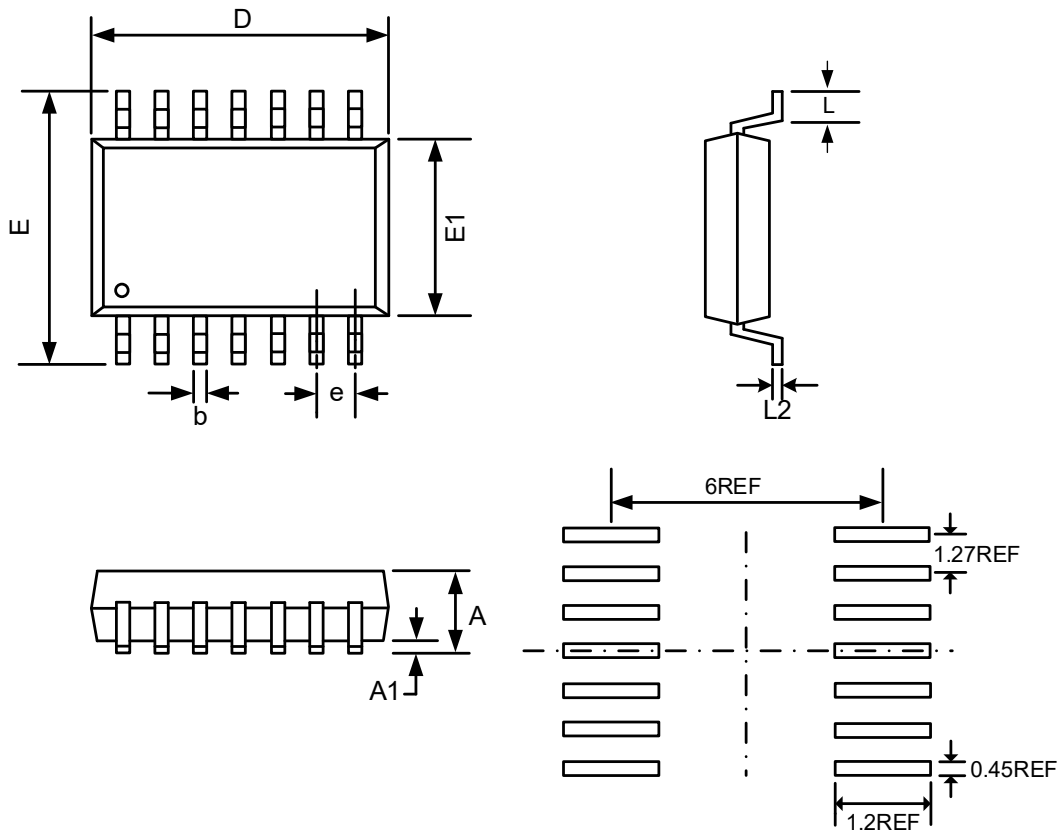


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	MAX
A	--	1.75
A1	0.10	0.25
b	0.36	0.51
D	8.55	8.75
E	5.80	6.20
E1	3.80	4.00
e	1.22	1.32
L	0.45	0.75
L2	0.25 BSC	

ET74LVC08A

TSSOP14 (4.4mm × 5.0mm)

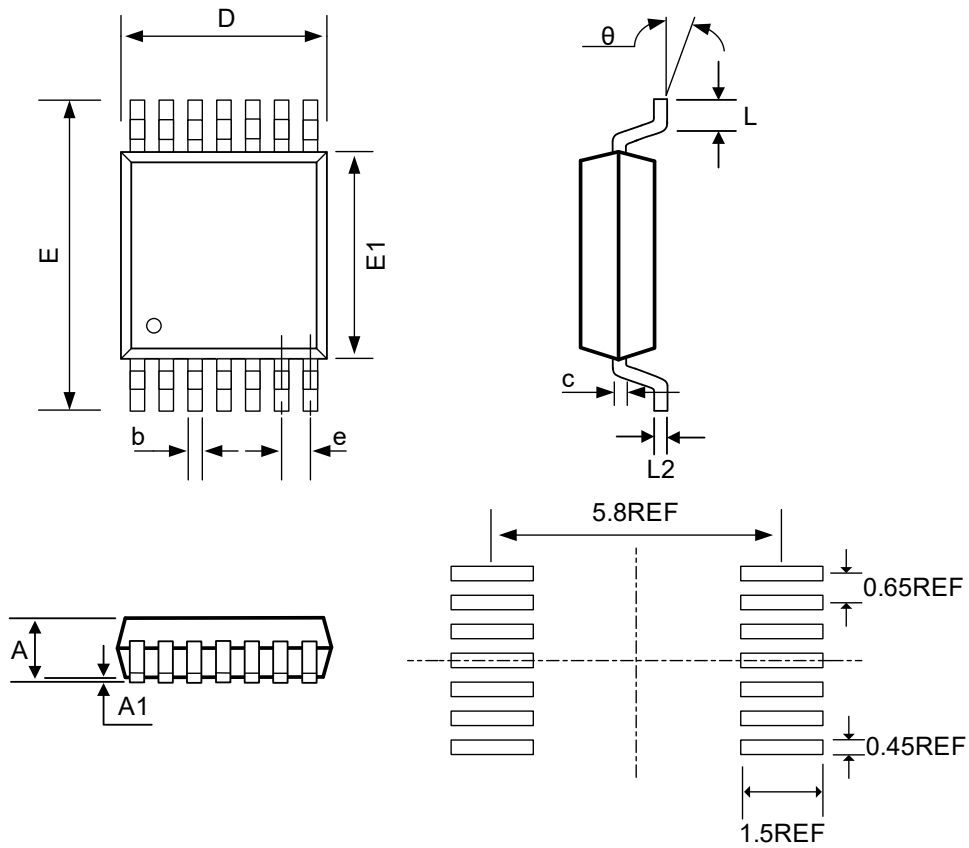

COMMON DIMENSIONS


(Unit: mm)

SYMBOL	MIN	MAX
A	--	1.20
A1	0.05	0.15
b	0.19	0.30
c	0.15 REF	
D	4.86	5.10
E	6.20	6.60
E1	4.30	4.50
e	0.65BSC	
L	0.45	0.75
L2	0.25 REF	
θ	0°	8°


ET74LVC08A

Tape Information

SOP14 (3.9mm × 8.65mm)

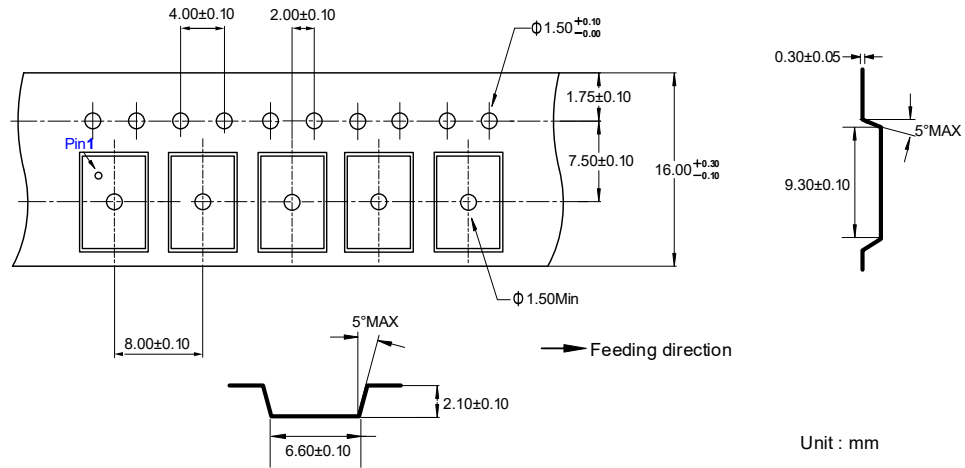

TSSOP14 (4.4mm × 5.0mm)

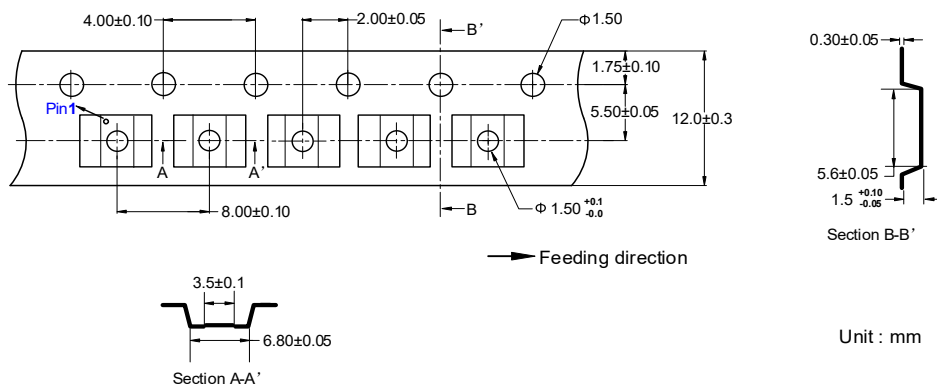

ET74LVC08A

Marking Information

C08A XXXXX ● ET74LVC08AM14 C08A = Part Number XXXXX = Tracking Number	08AV XXXXX ● ET74LVC08AV 08AV = Part Number XXXXX = Tracking Number
---	---

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
0.0	2025-02-13	Preliminary Version	Wang anran	Tu guozhu	Liu jiaying
1.0	2025-06-19	Official Version	Yu yifan	Tu guozhu	Liu jiaying
1.1	2026-03-11	Update Format, Add Tape and Marking	Xu tao	Yang xiaoxu	Liu jiaying