

Single 2-Input AND Gate

General Description


The ET74LVC1G08 is a single 2-input AND Gate operating from a 1.65V to 5.5V supply. This device is fabricated with advanced CMOS technology to achieve ultra-high speed with high output drive.

Features

- Designed for 1.65V to 5.5V V_{CC} Operation
- Over-voltage Tolerant Inputs Accept Voltages to 5.5V
- $\pm 32\text{mA}$ Balanced Output Sink and Source Capability
- Near Zero Static Supply Current Substantially Reduces System Power Requirements
- These Devices are Pb-Free and RoHS Compliant
- ESD Protection Complies with JESD22 Standard
 - HBM: $\pm 4000\text{V}$ Pass (JEDEC JS-001)
 - CDM: $\pm 1000\text{V}$ Pass (JEDEC JS-002)
- Latch-up Performance Exceeds $\pm 100\text{mA}$ per JEDEC JESD78F
- Part No. and Package Information

Part No.	Package	Packing Option	MSL
ET74LVC1G08	SC70-5 (1.3mm $\times$ 2.1mm)	Tape and Reel, 3K/Reel	3
ET74LVC1G08T	SOT23-5 (1.6mm $\times$ 2.9mm)	Tape and Reel, 3K/Reel	3
ET74LVC1G08Y	DFN6 (1.0mm $\times$ 1.5mm)	Tape and Reel, 3K/Reel	1
ET74LVC1G08Y1	DFN4 (0.8mm $\times$ 0.8mm)	Tape and Reel, 10K/Reel	1

Pin Configuration

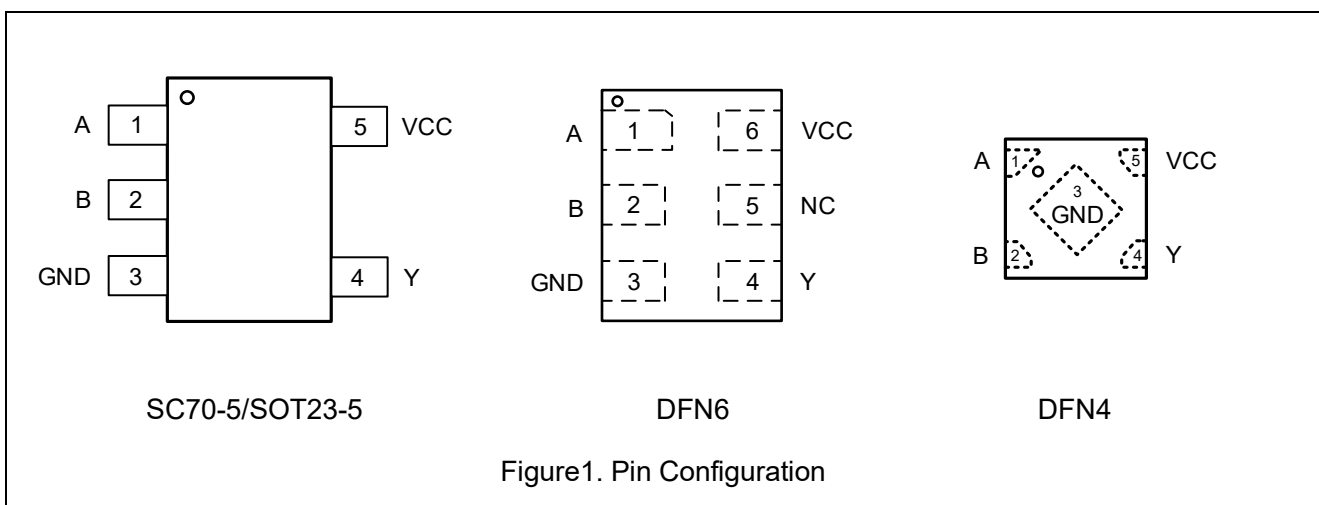

ET74LVC1G08

Pin Function

Pin No.				Pin Name	Pin Function
SC70-5	SOT23-5	DFN6	DFN4		
1	1	1	1	A	Input A
2	2	2	2	B	Input B
3	3	3	3	GND	Ground
4	4	4	4	Y	Output Y
/	/	5	/	NC	No Connect
5	5	6	5	VCC	Supply Voltage

Block Diagram




Figure2. Logic Symbol

Function Table

Input		Output
A	B	Y
L	L	L
L	H	L
H	L	L
H	H	H

ET74LVC1G08

Absolute Maximum Ratings

Symbol	Parameter		Value	Unit
V _{CC}	DC Supply Voltage		-0.5 to 6.5	V
V _I	DC Input Voltage ⁽¹⁾		-0.5 ≤ V _I ≤ 6.5	V
V _O	DC Output Voltage Output in Higher or Low State		-0.5 to V _{CC} + 0.5	V
I _{IK}	DC Input Diode Current, V _I < GND		-50	mA
I _{OK}	DC Output Diode Current, V _O < GND, V _O > V _{CC}		±50	mA
I _O	DC Output Sink Current		±50	mA
I _{CC}	DC Supply Current Per Supply Pin		100	mA
I _{GND}	DC Ground Current Per Supply Pin		-100	mA
T _{STG}	Storage Temperature Range		-65 to 150	°C
T _L	Lead Temperature, Soldering 10 Seconds		260	°C
T _J	Max Junction Temperature		150	°C
V _{ESD}	ESD Classification	Human Body Model ⁽²⁾	±4000	V
		Charged Device Model ⁽³⁾	±1000	
I _{LU}	Max Latch up Current Above V _{CC} and GND at 125°C ⁽⁴⁾		±100	mA

Stresses exceeding those listed in this table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

Note1: I_O absolute maximum rating must be observed.

Note2: HBM tested per JEDEC JS-001;

Note3: CDM tested per JEDEC JS-002;

Note4: Latch Up Current Maximum Rating tested per JEDEC JESD78F.

Thermal Characteristics

Symbol	Package	Ratings	Value	Unit
R _{θJA}	SC70-5	Thermal Characteristics, Thermal Resistance, Junction-to-Air	300	°C/W
	SOT23-5		250	
	DFN6		440	
	DFN4		285	
P _D	SC70-5	Power Dissipation in Still Air at 85°C	215	mW
	SOT23-5		260	
	DFN6		150	
	DFN4		350	

ET74LVC1G08

Recommended Operating Conditions

Symbol	Parameter		Min	Max	Unit
V _{CC}	DC Supply Voltage Operating		1.65	5.5	V
	Data Retention Voltage Operating		1.5	5.5	
V _I	DC Input Voltage		0	V _{CC}	V
V _O	DC Output Voltage (High or Low State)		0	V _{CC}	V
T _A	Operating Temperature Range		-40	125	°C
t _r , t _f	Input Rise and Fall Time	V _{CC} = 2.5V ± 0.2V	0	20	ns/V
		V _{CC} = 3.0V ± 0.3V	0	10	
		V _{CC} = 5.0V ± 0.5V	0	5	

Functional operation above the stresses listed in the Recommended Operating Ranges is not implied.

Electrical Characteristics

DC Electrical Characteristics

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
V _{IH}	High-Level Input Voltage		1.65~1.95	0.75V _{CC}			0.75V _{CC}		V
			2.3~5.5	0.7V _{CC}			0.7V _{CC}		
V _{IL}	Low-Level Input Voltage		1.65~1.95			0.25V _{CC}		0.25V _{CC}	V
			2.3~5.5			0.3V _{CC}		0.3V _{CC}	
V _{OH}	High-Level Output Voltage	I _{OH} = -100μA	1.65~5.5	V _{CC} - 0.1	V _{CC}		V _{CC} - 0.1		V
		I _{OH} = -3mA	1.65	1.29	1.52		1.29		
		I _{OH} = -8mA	2.3	1.9	2.1		1.9		
		I _{OH} = -12mA	2.7	2.2	2.4		2.2		
		I _{OH} = -16mA	3.0	2.4	2.7		2.4		
		I _{OH} = -24mA	3.0	2.3	2.5		2.3		
		I _{OH} = -32mA	4.5	3.8	4.0		3.8		
V _{OL}	Low-Level Output Voltage	I _{OL} = 100μA	1.65~5.5		0.0	0.1		0.1	V
		I _{OL} = 3mA	1.65		0.08	0.24		0.24	
		I _{OL} = 8mA	2.3		0.20	0.3		0.3	
		I _{OL} = 12mA	2.7		0.22	0.4		0.4	
		I _{OL} = 16mA	3.0		0.28	0.4		0.4	
		I _{OL} = 24mA	3.0		0.38	0.55		0.55	
		I _{OL} = 32mA	4.5		0.42	0.55		0.55	

ET74LVC1G08

DC Electrical Characteristics (Continued)

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
I _{IN}	Input Leakage Current	V _I = 5.5V or GND	0~5.5			± 0.1		±1.0	μA
I _{OFF}	Power Off Leakage Current	V _I = 5.5V or V _O = 5.5V	0			1.0		10	μA
I _{CC}	Quiescent Supply Current	V _I = 5.5V or GND	5.5			1.0		10	μA

AC Electrical Characteristics

t_r = t_f = 3ns

Symbol	Parameter	Condition	V _{CC} (V)	T _A = 25°C			-40°C ≤ T _A ≤ 125°C		Unit
				Min	Typ	Max	Min	Max	
t _{PLH} t _{PHL}	Propagation Delay (Figure 3 & 4)	R _L = 1MΩ C _L = 15pF	1.65	2.0	12.5	15	2.0	16.5	ns
			1.8	2.0	10.2	12.6	2.0	15	
		R _L = 1MΩ C _L = 15pF	2.5	0.2	6.0	7.7	0.8	10.8	
		R _L = 1MΩ C _L = 15pF	3.3	0.8	5.0	6.5	0.5	9.6	
		R _L = 500Ω C _L = 50pF		1.2	5.6	7.1	1.5	10.2	
		R _L = 1MΩ C _L = 15pF	5.0	0.5	4.4	5.6	0.5	6.1	
		R _L = 500Ω C _L = 50pF		0.8	4.8	6.1	0.8	6.6	

Capacitance Characteristics

Symbol	Parameter	Condition	Typ	Unit
C _{IN}	Input Capacitance	V _{CC} = 5.5V, V _I = 0V or V _{CC}	3.5	pF
C _{PD}	Power Dissipation Capacitance ⁽⁵⁾	10MHz, V _{CC} = 3.3V, V _I = 0V or V _{CC}	26	pF
		10MHz, V _{CC} = 5.5V, V _I = 0V or V _{CC}	30	

Note5: C_{PD} is used to determine the dynamic power dissipation (P_D in μW).

$P_D = C_{PD} \times V_{CC}^2 \times f_i \times N + \Sigma(C_L \times V_{CC}^2 \times f_o)$ where:

f_i = input frequency in MHz;

f_o = output frequency in MHz;

C_L = output load capacitance in pF;

V_{CC} = supply voltage in V;

N = number of inputs switching;

Σ(C_L × V_{CC}² × f_o) = sum of outputs.

ET74LVC1G08

AC Test Circuit

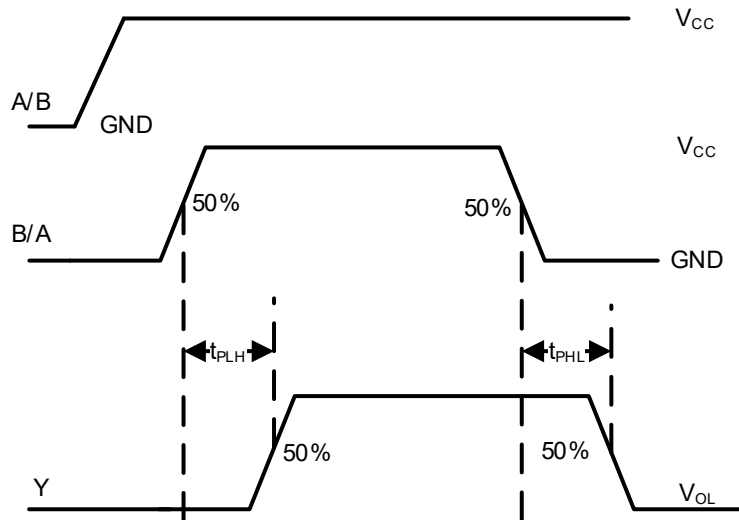


Figure3. Switching Waveform

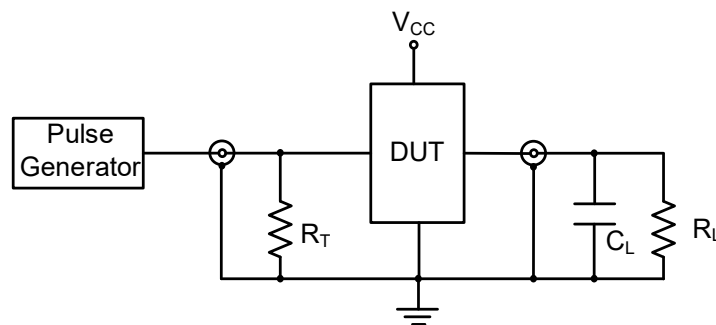



Figure4. Test Circuit

Note6: This electric circuit only supplies for reference. It is recommended to ground the unused I/O ports and ensure they are **not left floating**.

ET74LVC1G08

Package Dimension

SC70-5 (1.3mm × 2.1mm)

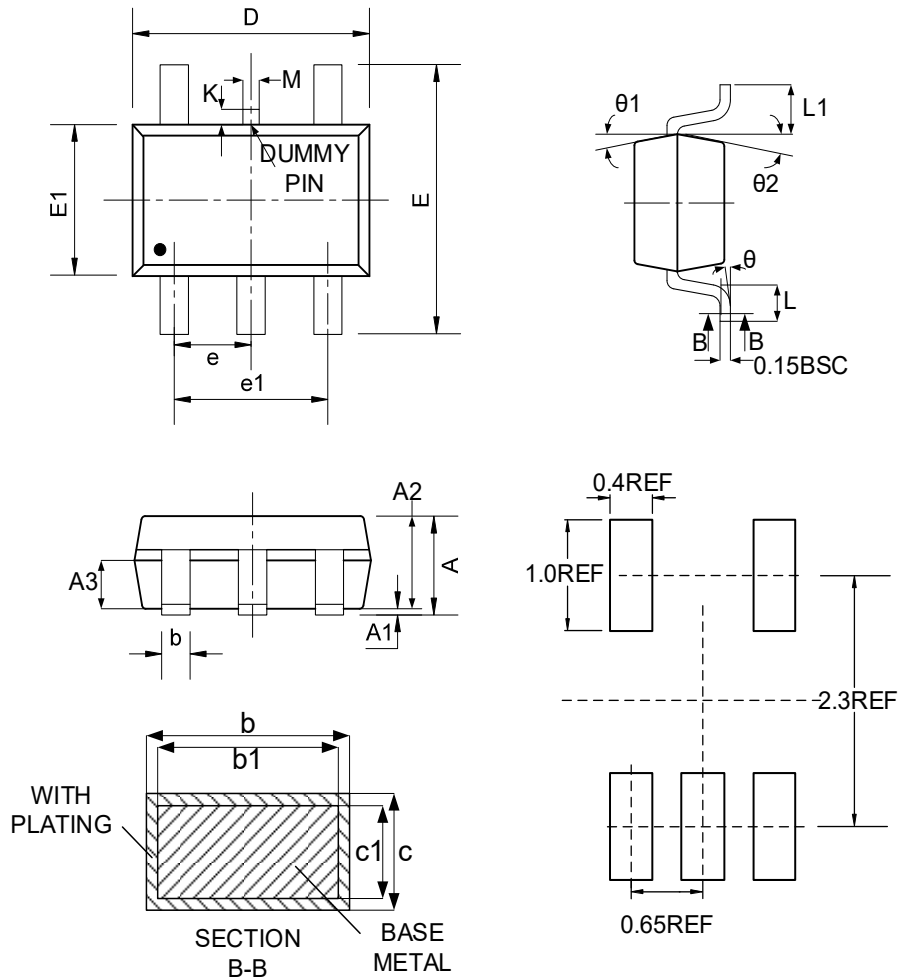


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	0.80	-	1.10	e	0.60	0.65	0.70
A1	0.00	-	0.10	e1	1.20	1.30	1.40
A2	0.80	0.90	1.00	L	0.26	0.33	0.46
A3	0.40	0.50	0.60	E1	1.21	1.26	1.31
b	0.17	-	0.30	L1	0.52REF		
b1	0.17	0.22	0.25	M	0.10	0.15	0.20
c	0.12	-	0.20	K	0.00	-	0.20
c1	0.12	0.15	0.16	θ	0°	-	8°
D	2.02	2.07	2.12	θ1	10°	12°	14°
E	2.20	2.30	2.40	θ2	10°	12°	14°

ET74LVC1G08

SOT23-5 (1.6mm × 2.9mm)

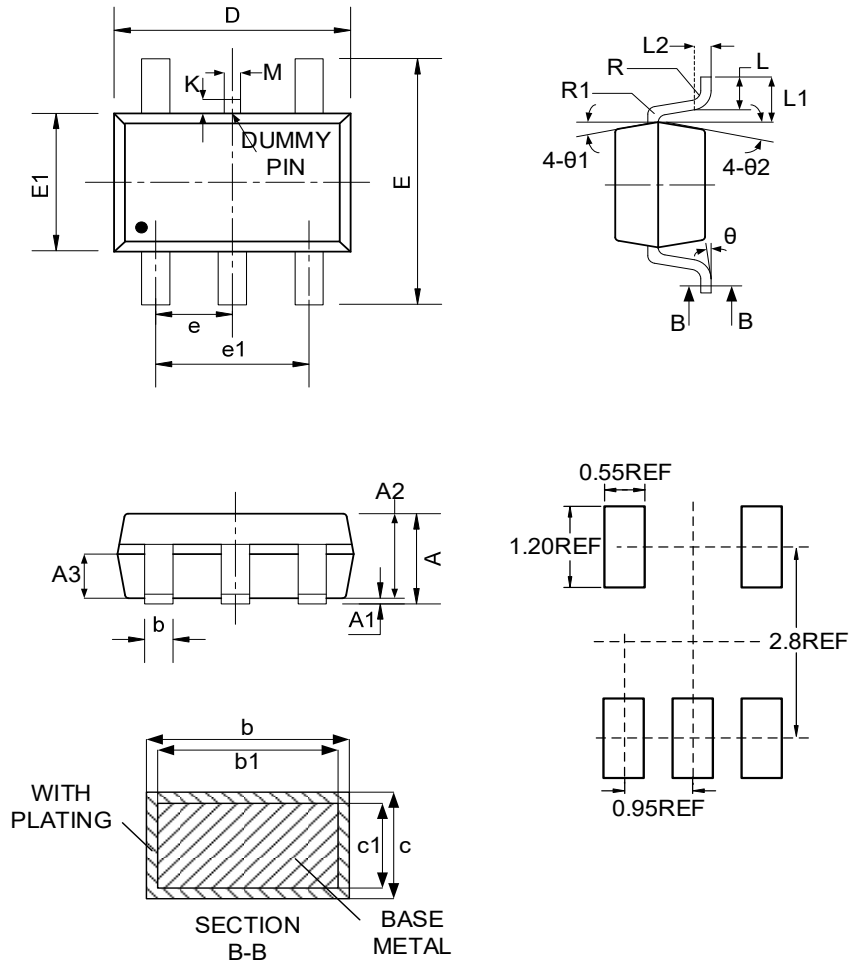


COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX	SYMBOL	MIN	NOM	MAX
A	-	-	1.25	K	0	-	0.20
A1	0.00	-	0.15	M	0.10	0.15	0.20
A2	1.00	1.10	1.20	L	0.30	0.40	0.60
A3	0.60	0.65	0.70	L1	0.59REF		
b	0.34	-	0.45	L2	0.25BSC		
b1	0.34	0.38	0.41	R	0.05	-	0.20
c	0.12	-	0.20	R1	0.05	-	0.20
c1	0.12	0.15	0.16	θ	0°	-	8°
D	2.826	2.926	3.026	θ1	8°	10°	12°
E	2.60	2.80	3.00	θ2	10°	12°	14°
E1	1.526	1.626	1.70				
e	0.90	0.95	1.00				
e1	1.80	1.90	2.00				

ET74LVC1G08

DFN6 (1.0mm × 1.5mm)

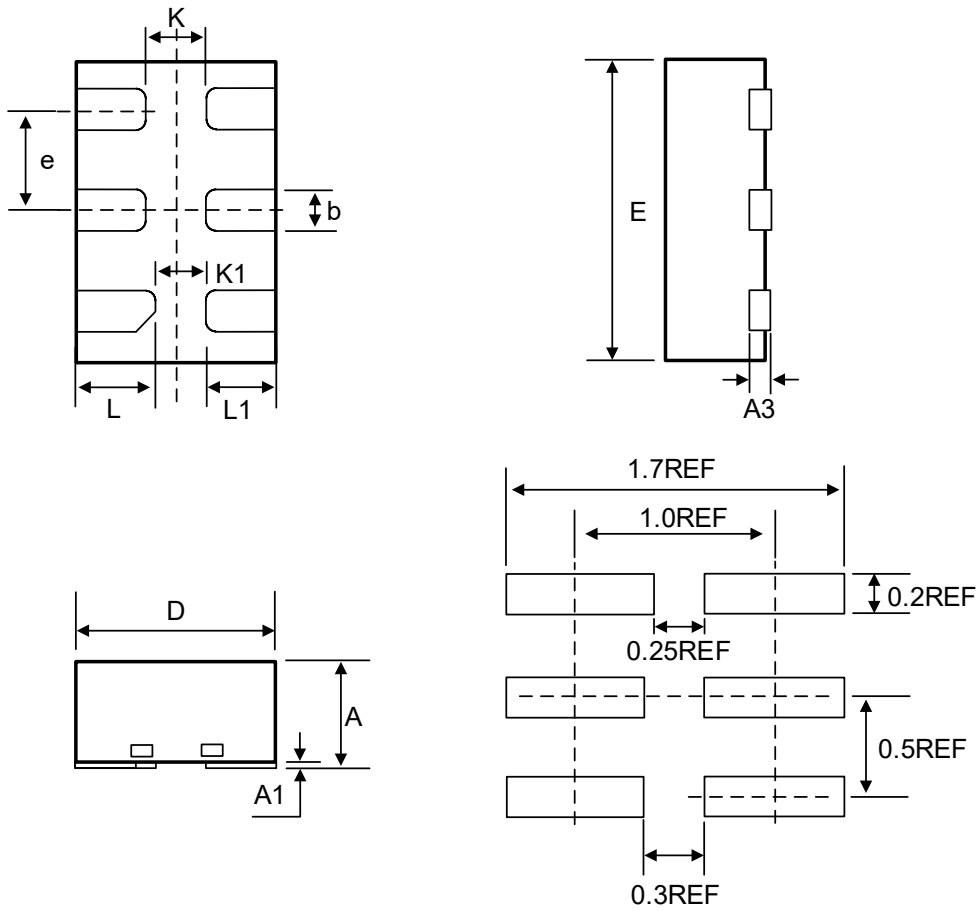

COMMON DIMENSIONS

(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	0.50	--	0.60
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.15	0.20	0.25
D	0.90	1.00	1.10
E	1.40	1.50	1.60
e	0.50BSC		
K	0.30REF		
K1	0.25REF		
L	0.35	0.40	0.45
L1	0.30	0.35	0.40

DFN4 (0.8mm × 0.8mm)




(Unit: mm)

SYMBOL	MIN	NOM	MAX
A	0.34	0.37	0.40
A1	0.00	0.02	0.05
A3	0.10REF		
b	0.17	0.22	0.27
D	0.75	0.80	0.85
E	0.75	0.80	0.85
D2	0.20	0.25	0.30
E2	0.20	0.25	0.30
e	0.43	0.48	0.53
H	0.22REF		
L	0.17	0.22	0.27
L1	0.18	0.28	0.38
L2	0.05REF		


ET74LVC1G08

Tape Information


SC70-5 (1.3mm × 2.1mm)

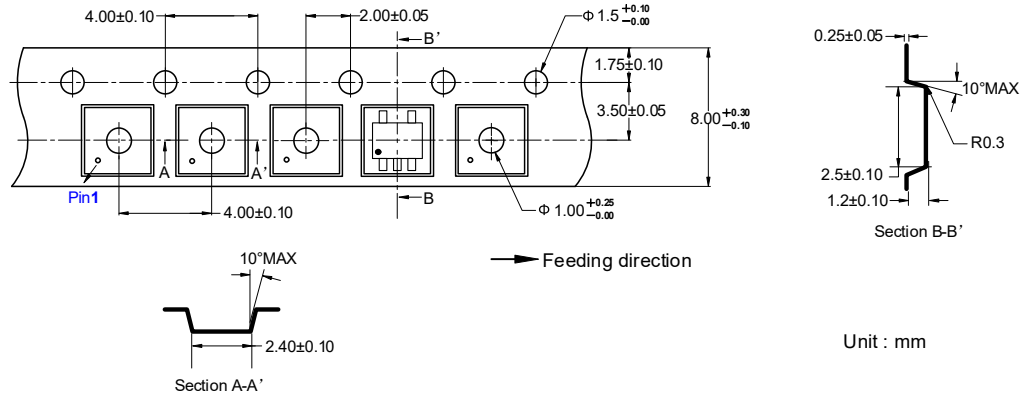

SOT23-5 (1.6mm × 2.9mm)

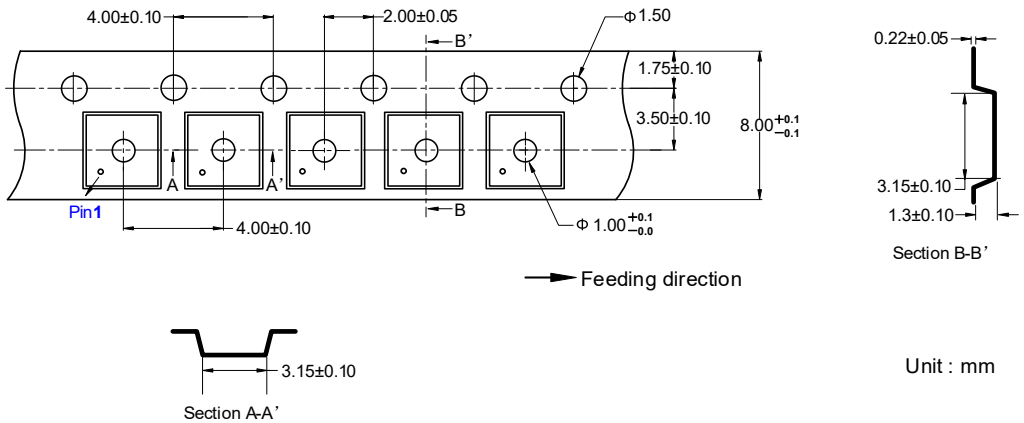


DFN6 (1.0mm × 1.5mm)

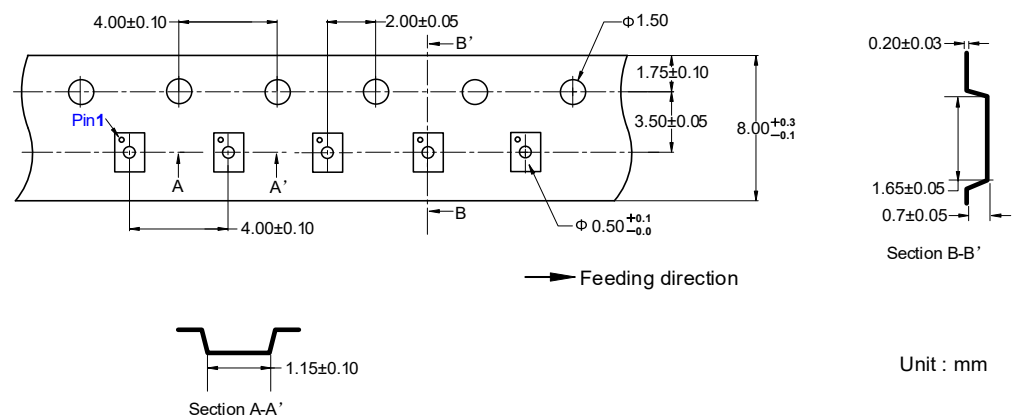


ET74LVC1G08


DFN4 (0.8mm × 0.8mm)

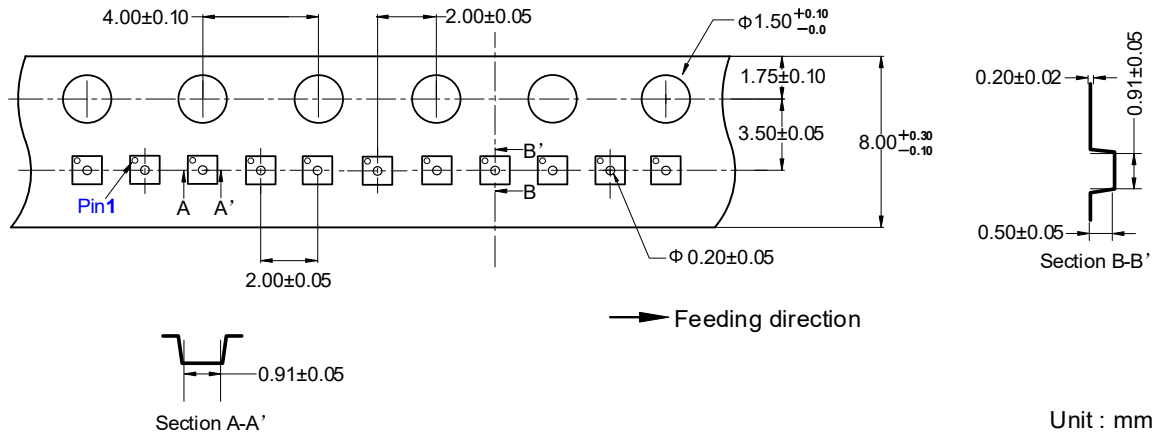


Marking Information




ET74LVC1G08
1G08 = Part Number
X = Tracking Number



ET74LVC1G08Y
8 = Part Number
X = Tracking Number



ET74LVC1G08T
C18 = Part Number
XXXXXX = Tracking Number



ET74LVC1G08Y1
8 = Part Number
X = Tracking Number

ET74LVC1G08

Revision History and Checking Table

Version	Date	Revision Item	Modifier	Function & Spec Checking	Package & Tape Checking
1.0	2017-07-18	Original Version	Ma yongjian	Ma yongjian	Liu jiaying
1.1	2019-07-18	Update AC table and device information	Ma yongjian	Ma yongjian	Liu jiaying
1.2	2021-06-25	Update Cpd in AC table and lin/Ioff/Icc in dc table	Ma yongjian	Ma yongjian	Liu jiaying
1.3	2022-01-18	Add SC70-5 Recommended Pad Layout	Shi bo	Shi bo	Zhu junli
1.4	2022-04-26	ESD update	Shi bo	Shi bo	Zhu junli
1.5	2022-07-07	Add θ_{JB} , $T_A = 125^{\circ}\text{C}$	Shi bo	Shi bo	Zhu junli
1.6	2022-10-14	Update format and Thermal Characteristics	Wu han	Shi bo	Zhu junli
1.7	2023-11-29	Update Typeset / package picture	Shi bo	Shi bo	Liu jiaying
1.8	2025-05-29	Add Packing Option	Yang xiaoxu	Yang xiaoxu	Liu jiaying
1.9	2025-07-21	Update Electrical Characteristics	Yu yifan	Yang xiaoxu	Liu jiaying
1.9.a	2025-09-02	Update Typeset	Peng junjie	Yang xiaoxu	Liu jiaying
1.10	2025-12-03	Add Marking and Tape Information	Yang xiaoxu	Yang xiaoxu	Liu jiaying
1.11	2026-01-23	Delete θ_{JB} , Add DFN4 Package, Update Format	Xu tao	Yang xiaoxu	Liu jiaying
1.12	2026-7-31	Update Package	Lu Shao jie	Yang Xiao xu	Liu Jiaying